



PERFORMANCE



STYLE

CHOICES



COMFORT

2018 Collection





Ceiling Fans Made Simple

Quality, Energy-Saving Motors

The motor is responsible for supplying the power to drive the fan's blades for maximum performance. Most quality motors have electrical ratings of 1.5 amps or less because top-notch materials like high-grade copper wire, precision bearings and dynamically balanced aluminum rotors give the fan all the power it needs. Regency motors are carefully selected to be the most efficient for the fan's blade size and the room's environment, and all have electrical ratings of 1.5 amps or less.

ENERGY STAR is the government-backed symbol for energy efficiency. With more efficient fan motors and improved blade design, ENERGY STAR qualified ceiling fans provide increased comfort while saving energy. Regency offers a wide selection of ENERGY STAR qualified ceiling fans and light kits.

Quality Blades

Regency fan blades are finished with the best real wood veneer to keep out moisture and resist warping. They are computer balanced to within one gram of each other. Regency's blade arms are made of high-grade, die-cast zinc or steel. They are measured to the exact same pitch and balance and have large mounting screws with lock washers to ensure exact alignment.

Maximum Performance

Peak performance on any fan is attained by the perfect combination of blade size, motor size, and blade pitch.

Regency's Decor-Match™ system offers endless combinations, so the recommended options for maximum performance are listed for each fan on both the fan's catalog page and the specifications guide in the back of the catalog (pages 79-83).

Important Features for Quiet Operation

- Bearings: Regency only uses double-sealed, lubricated-for-life, high-grade steel bearings. The lubricant stays in and the dust and dirt stay out for quiet, lifelong operation.
- Speed Control: Capacitors control the speed of the fan, and Regency uses a separate one for each speed - three in every three-speed fan. Single capacitor fans can be three-speed, but often hum.
- Vibration Isolators: Generous use of gaskets and washers throughout a fan will dampen motor vibrations. Regency uses the highest quality rubber hang-bracket isolators, motor gaskets and blade-screw washers for quiet operation.

Simple Installation

Proper installation is essential to guarantee a quiet, smooth-running ceiling fan. All Regency fans are designed to make installation very simple and ensure that every component fits tightly together, stays in alignment and operates silently and wobble-free.

Table Of Contents

Indoor/Outdoor			
Designer Series Fans	5-26	Decor-Match™ Series Fans	37-42
Vantage.....	6-7	Gladiator.....	38-39
Vail.....	8-9	MX Excel (MX2).....	40-41
Tier.....	10-11	LX2.....	42
Module.....	12	Decor-Match™ Unipack Series Fans	43-52
Artiste.....	13	Grand Marquis.....	44-45
Verge.....	14	Lafayette.....	46-47
Artiste 2.....	15	Envoy.....	48-49
Bimini.....	16	Marquis.....	50-51
Spire.....	17	Countess.....	52
Tropic Air.....	18	Professional Series Fans	53-61
Andros.....	18	Professional Series with	
Cayman.....	19	LK10 Light Kit.....	54-55
Oasis.....	20-21	Professional Series with	
Vera Cruz.....	22-23	LK41 Light Kit.....	56-57
Ciara.....	24	Professional Series.....	58-59
Cabana.....	25	Industrial.....	60-61
Patio Pro.....	26		
Designer Series Fans	27-36		
Grander.....	28-29		
Strasbourg.....	30		
Hover.....	31		
Indy.....	32-33		
Trend.....	34		
Nola.....	35		
Deuce.....	36		
Deuce Hugger.....	36		
		52X Designer Decor-Match™ Blades	62
		Gladiator Designer Blades.....	63
		Grander Designer Blades.....	64
		54" Carved Wood Blades.....	65
		Outdoor Blades.....	66-67
		Decor-Match™ Blades.....	68
		Downrods.....	69
		LED Light Kits.....	70-72
		Light Kits.....	73
		Damp Location Light Kits.....	73
		Wet Location Light Kits.....	73
		Energy Saving Wet Location	
		Light Kits	73
		Fitters.....	74
		Glass Shades.....	74
		Bulbs.....	75
		Ceiling Accessories.....	75
		Pull Chains & Fobs.....	75
		Switches.....	75
		Wall Controls.....	76-77
		Remote Controls.....	78
		Ceiling Fan Features and	
		Specifications	79-83
		Room Size, Ceiling Height and Slope ..	84
		Light Kit Specifications	85-86
		Fitter Specifications	86
		Index	87-88

Indoor/Outdoor Designer Series Fans



Vantage
pages 6-7



Vail
pages 8-9



Tier
pages 10-11



Module
page 12



Artiste
page 13



Verge
page 14



Artiste 2
page 15



Bimini
page 16



Spire
page 17



Tropic Air
page 18



Andros
page 18



Cayman
page 19



Oasis
pages 20-21



Vera Cruz
pages 22-23



Ciara
page 24



Cabana
page 25



Patio Pro
page 26

Designer Series Fans



Grander
pages 28-29



Strasburg
page 30



Hover
page 31



Indy
page 32-33



Trend
page 34



Nola
page 35



Deuce
page 36



Deuce Hugger
page 36

Decor-Match Series Fans



Gladiator
pages 38-39



MX Excel (MX2)
pages 40-41



LX2
page 42

Unipack Series Fans



Grand Marquis
pages 44-45



Lafayette
pages 46-47



Envoy
pages 48-49



Marquis
pages 50-51



Countess
page 52

Professional Series Fans



Professional with
LK10 light kit
pages 54-55



Professional with
LK41 light kit
pages 56-57



Professional
pages 58-59



Industrial
pages 60-61



Indoor/Outdoor Designer Fans

From contemporary to traditional, you'll find an Indoor/Outdoor Designer Series fan to complement any room décor. Choose from a variety of finishes to add stylish comfort to a favorite gathering place.

Regency's Underwriters Laboratories (UL) approval ratings assure that indoor/outdoor fans stand up to meticulous standards for quality, efficiency, durability and mechanical safety. Indoor/Outdoor Designer Series ceiling fans give you the sense of luxury and relaxation that only comes from Regency.

VT-LN

Liquid Nickel comes with Silver blades (UL wet location)



VT-DF

Driftwood fan comes with Driftwood blades (UL wet location)



VT-AW

Appliance White fan comes with Appliance White blades (UL wet location)



Create an aesthetic statement with the Vantage ceiling fan's modern industrial design featuring eight, gently curved blades. This enormous fan's whisper quiet DC motor will cool the largest of spaces and the fan's warm white LED light comes with a cover which may be used when the light is not needed.

VT-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades (UL wet location)



VT-MB

Matte Black fan comes with Matte Black blades (UL wet location)



VT-BNW

Brushed Nickel Wet fan comes with Silver blades (UL wet location)



Features:

- Eight, 66" blades **(Included)**
- **DC-165mm motor**
- 6-speed, reversing
- 12.5° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 16W frosted glass
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Light kit cover included
- Box weight 27 lb
- Remote Control included
- UL wet location rating



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
1	4500.48	6.3	714
2	7637.27	9.3	821
3	6027.82	10.8	558
4	7020.27	15.20	462
5	7637.27	20.60	371
6	8720.73	28.30	308

Options not included:

- Select Touch Wall Control (DCWC3) (Control indoor mount only)



Note:
Multiple Vantage fans cannot operate on the same circuit. Each Vantage fan must have its own power switch.

VA-AW

Appliance White fan comes with
Appliance White blades
(UL wet location)



VA-ORB

Oil Rubbed Bronze fan comes with
Oil Rubbed Bronze blades
(UL wet location)



VA-BNW

Brushed Nickel Wet fan comes
with Silver blades
(UL wet location)



VA-DF

Driftwood fan comes with Driftwood blades (UL wet location)



VA-MB

Matte Black fan comes with Matte Black blades (UL wet location)



VA-LN

Liquid Nickel fan comes with Silver blades (UL wet location)



Features:

- 52" blades **(Included)**
- **DC-125mm motor**
- 6-speed, reversing
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 16W frosted glass
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Light kit cover included
- Box weight 19.2 lb
- Remote Control included
- UL wet location rating



Options not included:

- Select Touch Wall Control (DCWC3) (Control indoor mount only)



Note:
Multiple Vail fans cannot operate on the same circuit.
Each Vail fan must have its own power switch.



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
1	1671.51	3.00	557
2	2800.67	5.00	560
3	3656.40	8.50	430
4	4589.36	14.00	328
5	5430.07	20.50	266
6	6354.69	33.00	193



TI-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades (UL wet location)



TI-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades (UL wet location)

TI-BNW

Brushed Nickel Wet fan comes with Silver blades (UL wet location)



Features:

- 54" blades **(Included)**
- 188 x 20mm motor
- 3-speed, manual reversing from switch
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 25°, 5/12 pitch
- LED 16W matte glass
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Light kit cover included
- Box weight 24.7 lb
- Remote Control included
- UL wet location rating



Options not included:

- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2500.54	18.00	139
High	5718.93	62.50	92



MU-BNW

Brushed Nickel Wet fan comes with Silver blades (UL wet location)

Features:

- Four, 58" beveled blades **(Included)**
- **DC-125Smm motor**
- 6-speed, reversing
- 13.5° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 17.5°, 4/12 pitch
- LED 17W matte glass
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Box weight 18.1 lb
- Remote Control included
- UL wet location rating



Options not included:

- Select Touch Wall Control (DCWC3) (Control indoor mount only)



Note:
Multiple Module fans cannot operate on the same circuit. Each Module fan must have its own power switch.

- Light kit cover



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
1	1692.17	3.40	498
2	2498.15	5.50	454
3	3328.92	9.30	358
4	3861.98	15.10	256
5	4676.85	24.20	193
6	5219.96	32.30	162



AT-ORB

Oil Rubbed Bronze fan comes with Dark Walnut blades
(UL damp location)

Features:

- Three, 60" blades **(Included)**
- **DC-188mm motor**
- 6-speed, reversing
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 17W frosted glass
- 3000K warm white color temperature
- Light output is 1350 lumens-delivered
- L70 - 40,000 hours
- Box weight 19.0 lb
- Remote Control included
- **UL damp location rating**



Options not included:

- Select Touch Wall Control (DCWC3)
(Control indoor mount only)



Note:
Multiple Artiste fans cannot operate on the same circuit.
Each Artiste fan must have its own power switch.

- Light kit cover

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
1	2082.97	1.90	955.49
2	3285.86	3.30	995.72
3	4337.83	6.20	699.65
4	5443.05	10.20	533.63
5	6710.73	18.40	364.71
6	8264.47	30.40	250.29



VR-BNW

Brushed Nickel Wet fan comes with Silver blades (UL wet location)

Features:

- Three, 52" blades **(Included)**
- 153 x 17mm motor
- 3-speed, manual reversing from switch
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 17W matte glass
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Box weight 19.4 lb
- Remote Control included
- UL wet location rating



Options not included:

- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1615.52	9.10	178
High	4930.93	52.40	94

AT2-BNW

Brushed Nickel
Wet fan comes with
Silver blades
(UL wet location)

AT2-ORB

Oil Rubbed Bronze fan comes
with Dark Walnut blades
(UL wet location)

AT2-MW

Matte White fan
comes with Matte
White blades
(UL wet location)

Features:

- Three, 72" blades **(Included)**
- **DC-188mm motor**
- 6-speed, reversing
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 17W frosted glass
- 3000K warm white color temperature
- Light output is 1350 lumens-delivered
- L70 - 40,000 hours
- Box weight 24.5 lb
- Remote Control included
- UL wet location rating



Options not included:

- Select Touch Wall Control (DCWC3)
(Control indoor mount only)



Note:
Multiple Artiste 2 fans cannot operate on the same circuit.
Each Artiste 2 fan must have its own power switch.

- Light kit cover



Performance and Energy Information

Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
1	3576.33	2.2	1625.6
2	4824.80	3.7	1304
3	6222.18	6.3	987.65
4	7647.00	10.3	742.43
5	9262.94	17.1	541.69
6	10280.28	26.9	382.17

BI-BNW

Brushed Nickel Wet fan comes with Silver blades and remote control (UL wet location)



BIM-AW

Appliance White fan comes with Appliance White blades and remote control (UL wet location)



BIM-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades and remote control (UL wet location)



Features:

- Light kit adaptable
- Three, 60" blades **(Included)**
- 188 x 22mm motor
- 3-speed, manual reversing from fan switch
- 14° blade pitch
- 4" downrod included
- Downrod mounting only
- Mounts to sloped ceilings up to 23°, 5/12 pitch
- Box weight 27.8 lb
- Remote Control included
- UL wet location rating



Options not included:

- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)




Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2846.00	17.00	167
High	6857.00	72.00	95

See pages 70,71,73 for wet location light kits.



SR-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades (UL wet location)

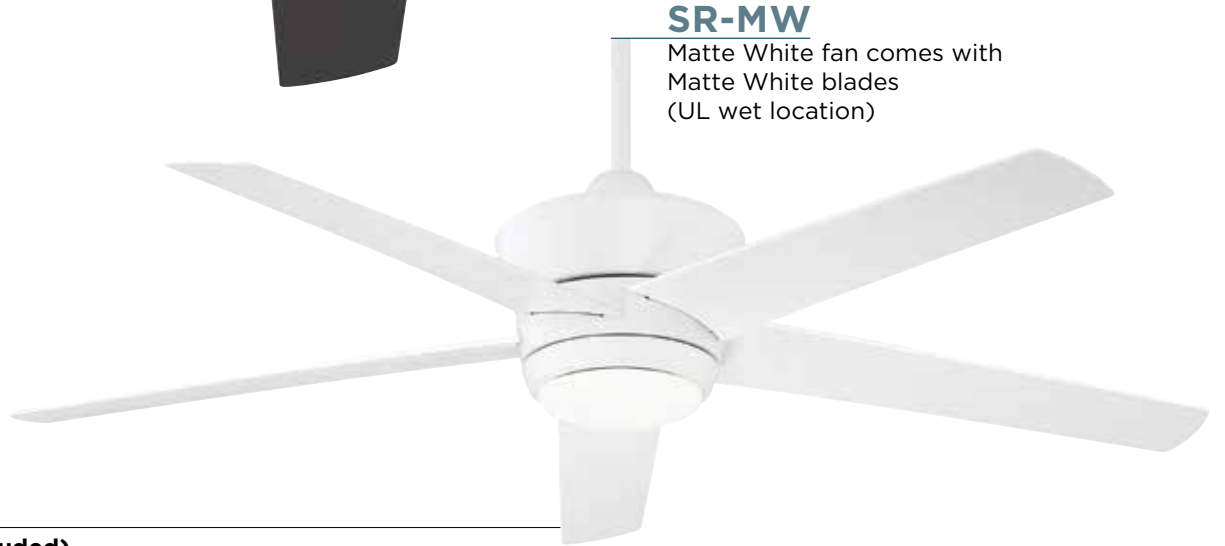

SR-MW

Matte White fan comes with Matte White blades (UL wet location)

Features:

- 52" blades **(Included)**
- 153 x 20mm motor
- 3-speed, manual reversing from fan switch
- 12° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 17W matte glass
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Light kit cover included
- Box weight 22 lb
- Remote Control included
- UL wet location rating



Options not included:


- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)



Performance and Energy Information

Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2244.21	11.70	192
High	4822.18	51.70	93

Tropic Air™ (MOTOR ONLY)

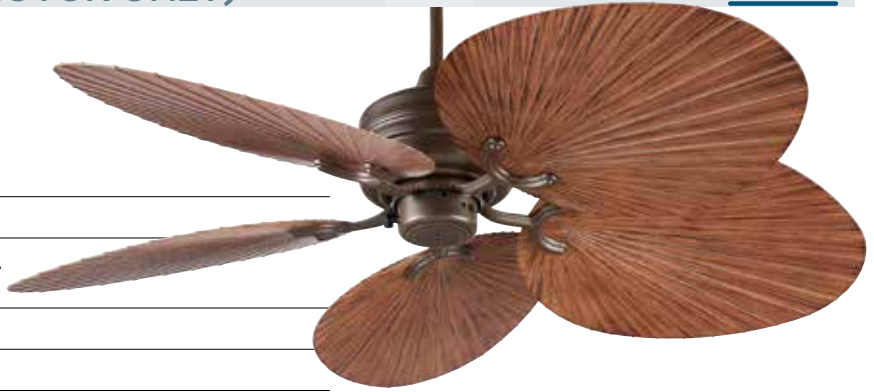

Features:

- Light kit adaptable
- Decor-Match™ blade options available. Recommend 52" and designer blades
- 188 x 25mm motor
- 3-speed, reversing
- 20° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 33°, 8/12 pitch
- Box weight 22 lb
- UL wet location rating

TA2-ORB

Oil Rubbed Bronze fan (Shown with PP52WAL Walnut ABS blades) (UL wet location)



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1100.00	13.00	85
High	5530.00	63.00	88

Options not included:




- Universal Remote Controls (URC-WL)/ (URC-WLES)



- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

See pages 70,71,73 for wet location light kits.

Andros™

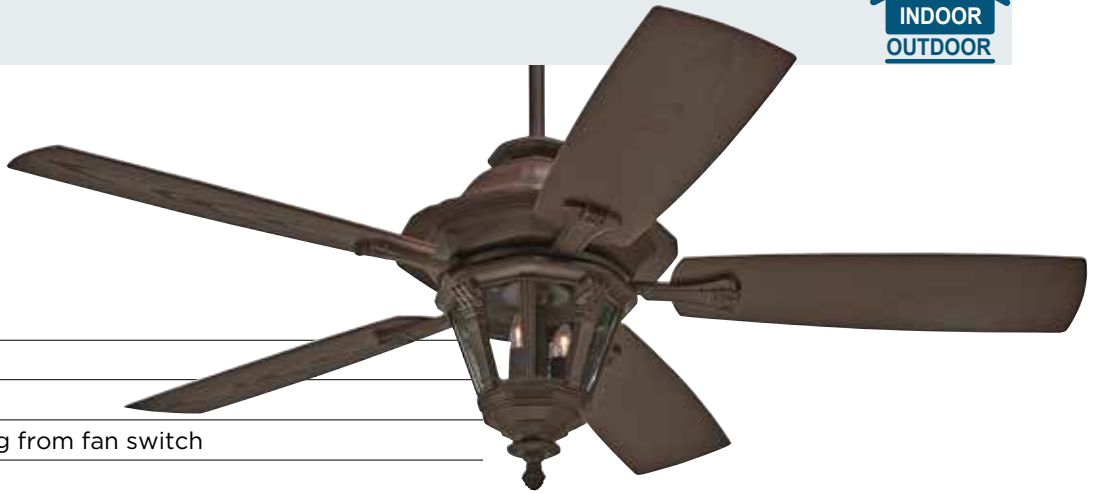

Features:

- 52" blades **(Included)**
- 172 x 20mm motor
- 3-speed, manual reversing from fan switch
- 14° blade pitch
- 4" downrod included
- Downrod mounting only
- Mounts to sloped ceilings up to 28°, 6/12 pitch
- 3 x 40W candelabra (E12) lower light included
- Box weight 32 lb
- Remote Control included
- UL wet location rating

AD-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades, light kit and remote control (UL wet location)

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2267.00	13.1	173
High	5387.00	59.0	91

Options not included:



- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

CM-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze ABS blades (UL wet location)




CM-AW

Appliance White fan comes with Appliance White ABS blades (Shown with LK95W-AW Appliance White light kit) (UL wet location)



CM-AW

Appliance White fan comes with Appliance White ABS blades (UL wet location)

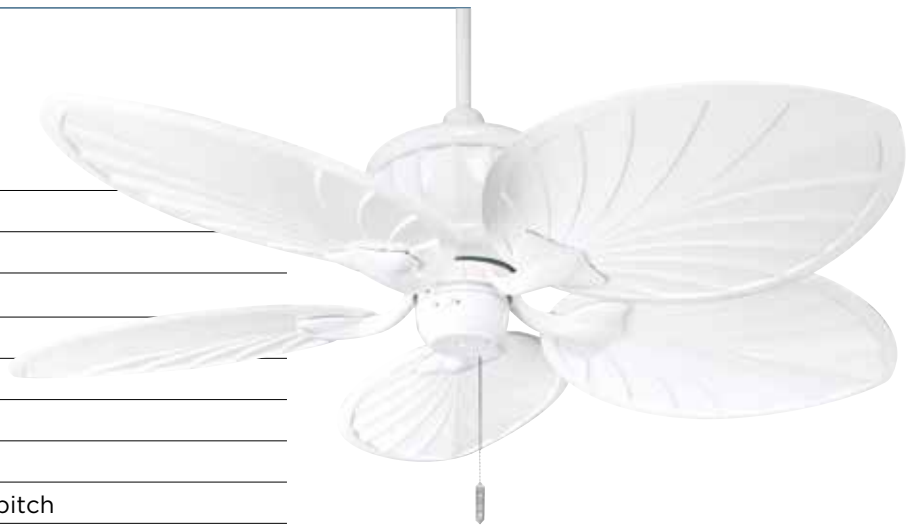

Features:

- Light kit adaptable
- 52" blades **(Included)**
- Decor-Match™ blade options available.
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 30°, 7/12 pitch
- Downrod mounting only
- Box weight 36.4 lb
- UL wet location rating

Options not included:



- Universal Remote Controls (URC-WL)/ (URC-WLES)



- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

See pages 70,71,73 for wet location light kits.

Mounting Recommendation

To reduce the risk of fire, electric shock or personal injury, mount this fan to an outlet box marked "ACCEPTABLE FOR FAN SUPPORT OF 70 LBS." and USE MOUNTING SCREWS PROVIDED WITH THE OUTLET BOX.



Performance and Energy Information

Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2235.00	14.00	159
High	5530.00	75.00	73

OA2-DF

Driftwood fan comes with Driftwood ABS blades (Shown with LK12W-DF Driftwood LED light kit)
(UL wet location)



OA2-AW

Appliance White fan comes with Appliance White ABS blades
(UL wet location)



OA2-AW

Appliance White fan (Shown with PP52AW+ Appliance White palm ABS blades)
(UL wet location)



Features:

- Light kit adaptable
- ABS fan housing
- 52" blades **(Included)**
- Decor-Match™ blade options available
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 26°, 6/12 pitch
- Downrod mounting only
- Box weight 22.3 lb
- UL wet location rating

Options not included:



- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

See pages 70,71,73 for wet location light kits.



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2276.00	10.00	228
High	6571.00	69.00	95



OA2-AW

Appliance White fan (Shown with PL52AW Appliance White leaf ABS blades) (UL wet location)



OA2-MB

Matte Black fan (Shown with PL52MHS Mahogany leaf ABS blades) (UL wet location)



OA2-MB

Matte Black fan comes with Matte Black blades (UL wet location)



OA2-ORB

Oil Rubbed Bronze fan (Shown with PP52WAL Walnut palm ABS blades) (UL wet location)



OA2-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades (Shown with LK95W-ORB Oil Rubbed Bronze light kit) (UL wet location)



OA2-ORB

Oil Rubbed Bronze fan (Shown with 52CMORB Oil Rubbed Bronze ABS) (UL wet location)



OA2-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades (Shown with LK90W-ORB Oil Rubbed Bronze light kit) (UL wet location)



OA2-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades (Shown with LK12W-ORB Oil Rubbed Bronze LED light kit) (UL wet location)

LED

VC2-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze ABS blades (UL wet location)



VC2-ORB

Oil Rubbed Bronze fan (Shown with PL52MHS Mahogany leaf ABS blades) (UL wet location)



Features:

- Light kit adaptable
- 52" blades **(Included)**
- Decor-Match™ blade options available
- Flush mount capability
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 35°, 8/12 pitch
- Box weight 18.7 lb
- UL wet location rating

Options not included:



- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

See pages 70,71,73 for wet location light kits.



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2325.00	11.00	219
High	5871.00	57.00	103

VC2-MB

Matte Black fan comes with
Matte Black ABS blades
(Shown with LK95W-MB
Matte Black light kit)
(UL wet location)



VC2-MB

Matte Black fan (Shown with
PL52MHS Mahogany leaf ABS blades)
(UL wet location)



VC2-MB

Matte Black fan comes with
Matte Black ABS blades
(Shown with LK12W-MB light kit)
(UL wet location)



VC2-MB

Matte Black fan comes with
Matte Black ABS blades
(UL wet location)



CI-MB

Matte Black fan comes with Matte Black blades (Shown with LK95W-MB Matte Black light kit) (UL wet location)



CI-AW

Appliance White fan comes with Appliance White blades (UL wet location)



CI-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades (UL wet location)



Features:

- Light kit adaptable
- 52" blades **(Included)**
- 172 x 14mm motor
- 3-speed forward, manual reversing from switch
- 13° blade pitch
- 4" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- Box weight 20 lb
- UL wet location rating

Options not included:



- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

See pages 70,71,73 for wet location light kits.

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1832.91	9.7	199
High	5270.39	61	87

RC-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze ABS blades (UL wet location)



RC-AW

Appliance White fan comes with Appliance White ABS blades (UL wet location)



Features:

- Light kit adaptable
- 36" blades **(Included)**
- Decor-Match™ blade options available.
- Flush mount capability
- 153 x 10mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 35°, 8/12 pitch
- Box weight 12.8 lb
- UL wet location rating



Options not included:



- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

See pages 70,71,73 for wet location light kits.

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1350.00	12.00	125
High	3520.00	47.00	74



VP2-AW

Appliance White fan comes with Appliance White ABS blades (UL wet location)

VP2-AW

Appliance White fan (Shown with PL52AW Appliance White leaf ABS blades) (UL wet location)



Features:

- Light kit adaptable
- 52" blades **(Included)**
- Decor-Match™ blade options available.
- Flush mount capability
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 35°, 8/12 pitch
- Box weight 15.4 lb
- UL wet location rating



Options not included:



- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

See pages 70,71,73 for wet location light kits.

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2325.00	11.00	219
High	5871.00	57.00	103



Designer Series

Inspired by the latest trends in styles and materials, Regency's comprehensive collection of Designer Series ceiling fans range from classic to progressively modern designs. Designer Series fans feature custom blades to complement the overall design themes, and they are engineered with a meticulous dedication to quality, efficiency and durability.

Grander™ (MOTOR ONLY) Select GN60/GN72 blades on page 64



GN-ORB

Oil Rubbed Bronze fan (Shown with GN60-ORB Oil Rubbed Bronze blades and LK272W-ORB LED light kit)
Sold separately

Features:

- Light kit adaptable
- Grander fan blades (GN) available in 60" and 72" on page 64
- **DC-165mm motor**
- 6-speed
- 13.5° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 22.05 lb
- Remote Control included



Options not included:

- Select Touch Wall Transmitter (DCWC3)



Note:
Multiple Grander fans cannot operate on the same circuit.
Each Grander fan must have its own power switch.

GN-AC

Antique Copper fan (Shown with GN72-AC Antique Copper blades)
Sold separately



GN-CW

Chalk White fan (Shown with GN72-CW Chalk White blades)
Sold separately



GN-BN

Brushed Nickel fan (Shown with GN60-MH Mahogany blades)
Sold separately



60-inch blades				72-inch blades			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)	Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
1	1901.99	3.2	594.37	1	2837.52	4.1	692.08
2	2789.67	4.2	664.21	2	3460.63	5.9	586.55
3	3517.62	7.0	502.52	3	4314.41	8.6	501.68
4	4703.46	11.6	405.47	4	5449.91	12.6	432.53
5	5505.07	17.4	316.38	5	6136.44	17.4	352.67
6	6791.70	31.2	217.68	6	7682.73	31.2	246.24

Strasburg™ with Mood Glow™ Uplight



ST-ORB

Oil Rubbed Bronze fan comes with combination Oil Rubbed Bronze/Cherry blades

Features:

- Light kit adaptable
- 60" blades **(Included)**
- Mood Glow Uplight
- 188 x 25mm motor
- 3-speed forward, reversing
- 14° blade pitch
- 6" and 12" downrods included
- Mounts to sloped ceilings up to 25°, 5/12 pitch
- 6 x 15W candelabra (E12) upper light included
- Box weight 38.6 lb
- Select Touch Wall Transmitter (2WWCD) included



Options not included:

- Remote Control Transmitter (RCTD)



Mounting Recommendation

To reduce the risk of fire, electric shock or personal injury, mount this fan to an outlet box marked "ACCEPTABLE FOR FAN SUPPORT OF 70 LBS." and USE MOUNTING SCREWS PROVIDED WITH THE OUTLET BOX.

Performance and Energy Information

Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2740.00	22.00	124
High	6105.00	80.00	76

Hover™ (MOTOR ONLY)

HV-BN

Brushed Nickel fan (Shown with 56HVDW Dark Walnut blades)
Sold separately

HV-BN

Brushed Nickel fan (Shown with 56HVSS Silver blades)
Sold separately

HV-BN

Brushed Nickel fan (Shown with 56HVCR Cherry blades)
Sold separately

Features:

- DC-125mm motor
- 6-speed, reversing
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 23°, 5/12 pitch
- LED 16W frosted glass
- 3000K Warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Box weight 13.8 lb
- Remote Control included



Options not included:

- Select Touch Wall Control (DCWC3)
- Light kit cover



Note:
Multiple Hover fans cannot operate on the same circuit.
Each Hover fan must have its own power switch.



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
1	1552.13	3.00	517
2	2511.19	5.30	474
3	3387.94	8.60	394
4	4171.96	14.30	292
5	5152.56	22.40	230
6	6047.94	33.20	182



IN-BN

Brushed Nickel fan comes with Silver Metal blades



IN-EB

Bronze fan comes with Bronze Metal blades



IN-MW

Matte White fan comes with Matte White Metal blades



IN-MB

Matte Black fan comes with Matte Black Metal blades

Features:

- Light kit adaptable
- Three, 56" metal blades **(Included)**
- 172 x 17mm motor
- 4-speed, no reversing function
- 35° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- Box weight 17.2 lb
- Wall Control (FCS-2)



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
1	5410.75	63	88.90
2	2749.82	33.80	81.36
3	3846.50	17.50	219.80
4	2248.46	9.80	212.11



TN-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades

Features:

- Four, 52" blades **(Included)**
- Mood Glow Uplight
- 153 x 17mm motor
- 3-speed forward, reversing
- 14° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 23°, 5/12 pitch
- 4 x 25W candelabra (E12) upper light included*



- Box weight 19.8 lb
- Remote Control included
- *replacement bulb - LX-bulb



Options not included:

- Select Touch Wall Transmitter (2WWC)

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1549.00	12.00	129
High	4870.00	69.00	71

NL-ORB

Oil Rubbed Bronze fan comes with Oil Rubbed Bronze blades



NL-BN

Brushed Nickel fan comes with Silver blades



Features:

- 52" blades **(Included)**
- 172 x 15mm motor
- 3-speed forward, reversing
- 14° blade pitch
- 1 x 100W "JDE 11" halogen bulb (E11)
- Box weight 22.5 lb
- Remote Control included



Options not included:

- Select Touch Wall Transmitter (2WWC)



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1476.00	18.50	80
High	4133.00	64.00	65

Deuce™

DU-BN

Brushed Nickel fan comes with Silver blades



Features:

- Two, 54" blades **(Included)**
- 153 x 22mm motor
- 3-speed forward, manual reversing from switch
- 15° blade pitch
- 4" downrod included
- Light kit cover included
- Mounts to sloped ceilings up to 29°, 6/12 pitch
- 1 x 75W halogen bulb (E11) (included)
- Box weight 21.6 lb
- Remote Control included



Options not included:

- Select Touch Wall Transmitter (2WWC)

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1773.00	10.00	177
High	5968.00	69.00	86

Deuce Hugger™

DH-MB

Matte Black fan comes with Matte Black blades



Features:

- Two, 54" blades **(Included)**
- 153 x 22mm motor
- 3-speed forward, reversing
- 14° blade pitch
- Light kit cover included
- 1 x 75W halogen bulb (E11) lower light included
- Box weight 21.2 lb
- Remote Control included



Options not included:

- Select Touch Wall Transmitter (2WWC)

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1773.00	10.00	177
High	5968.00	69.00	86



Decor-Match™ Series

Regency's Decor-Match Series allows for customization to match personal styles and home décors. Select from a large variety of ceiling fan motors, blades, light kits and fan controls. Although the Decor-Match Series fans are shown in the photos with suggested blades, most Decor-Match ceiling fans may accommodate most Decor-Match, Designer and outdoor blades and light kits.

Gladiator™ (MOTOR ONLY) Select TB60 blades on page 63



GL3-AC

Antique Copper fan (Shown with TB60-AC Antique Copper blades and LK272-AC LED light kit)

GL3-SS

Satin Steel fan (Shown with TB60-MP Maple blades)



Features:

- Light kit adaptable
- Gladiator TB60 blades (see page 63)
- **DC-125mm motor**
- 6-speed, reversing
- 16° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 22.7 lb
- Remote Control included



Options not included:

- Select Touch Wall Transmitter (DCWC3)



Note:
Multiple GL3 fans cannot operate on the same circuit.
Each GL3 fan must have its own power switch.

GL3-CW

Chalk White fan (Shown with TB60-CW Chalk White blades)



GL3-ORB

Oil Rubbed Bronze fan (Shown with TB60-ORB Oil Rubbed Bronze blades)



GL3-BN

Brushed Nickel fan (Shown with TB60-CR Cherry blades and LK65-BN light kit)



Performance and Energy Information					
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)	AMP (A)	RPM
1	2787.6	4.7	633.53	0.08	50
2	3443.94	8.2	529.84	0.14	65
3	4085.43	11.6	408.54	0.18	78
4	4859.42	17.5	373.80	0.25	92
5	5455.99	24.4	272.80	0.33	106
6	6563.5	32.3	218.78	0.45	121

MX Excel™ (MOTOR ONLY)

MX2-AC

Antique Copper fan (Shown with 52TK Teak blades and LK80A light kit)



MX2-ORB

Oil Rubbed Bronze fan (Shown with 52TK Teak blades and LK14A-ORB light kit)



MX2-BN

Brushed Nickel fan (Shown with 52XCR Cherry blades and LK272W-BNW LED light kit)



Features:

- Light kit adaptable
- Decor-Match™ blade options available. Recommend 52", 56" and designer blades.
- Flush mount capability
- 188 x 22mm motor
- 3-speed, reversing
- 16° blade pitch
- 3" and 6" downrods included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 19.8 lb

Options not included:

- Full function remote control requires purchase of RCR - receiver, RC2 - housing
- RCT - Remote Control Transmitter or
- 2WWC - Select Touch Wall Transmitter



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1985.00	11.00	180
High	6380.00	78.00	82



MX2-BB

Burnished Brass fan (Shown with 52XDW Dark Walnut blades and LK9-BB Burnished Brass light Kit)



MX2-CW

Chalk White fan (Shown with 52XCW Chalk White blades and LK82 LED light kit)



MX2-CW

Chalk White fan (Shown with 52CW Chalk White blades and LK60-CW Chalk White light kit)



MX2-SS

Satin Steel fan (Shown with 52MP Maple blades)



MX2-AW

Appliance White fan (Shown with 52AWS Appliance White blades)



MX2-MB

Matte Black fan (Shown with 52MB Matte Black blades)

LX2™ with Mood Glow™ Uplight (MOTOR ONLY)


LX2-ORB

Oil Rubbed Bronze fan (Shown with 56ORB Oil Rubbed Bronze blades)



LX2-BN

Brushed Nickel fan (Shown with 56AWS Appliance White blades and LK14-BN light kit)

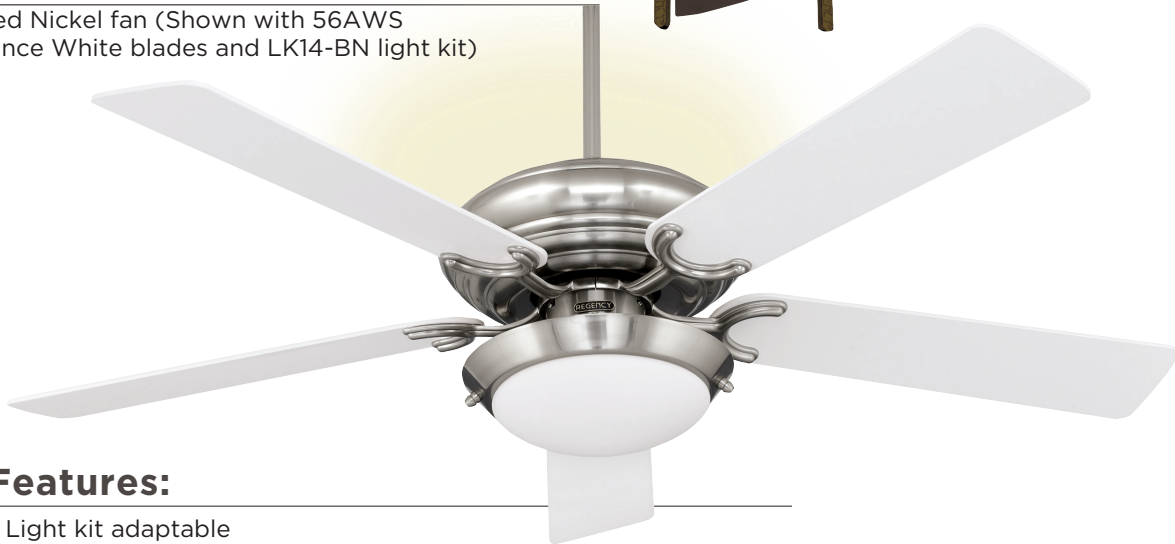

Features:

- Light kit adaptable
- Decor-Match™ blade options available. Recommend 52", 56" and designer blades.
- Mood Glow Uplight
- 188 x 20mm motor
- 3-speed, reversing
- 14° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 33°, 8/12 pitch
- 4 x 25W candelabra (E12) upper light (included)*
- Box weight 19.8 lb

*replacement bulb - LX-bulb

Options not included:

Full function remote control requires purchase of RCRD - receiver, RC2 - housing

- RCTD - Remote Control Transmitter
- or
- 2WWCD - Select Touch Wall Transmitter



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	3300.00	25.00	133
High	6540.00	72.00	91



Regency's Decor-Match™ Unipack Fans

Regency's Decor-Match Unipack Series consists of the most popular ceiling fan models with coordinating fan blades included in the box with the fans. The 52X blades are crafted from exquisite wood materials and contoured and tapered to complement all of the Unipack Series fan designs. Optional designer Decor-Match blades may be purchased separately for the Unipack Series fans.

Grand Marquis™ (UNIPACK)

GMRP-BN

Brushed Nickel fan comes with 52XCR/MH combination Cherry/Mahogany blades and LK65-BN (with Alabaster glass) light kit. Shown with Cherry blades.



GMRP-BN

Brushed Nickel fan comes with 52XCR/MH combination Cherry/Mahogany blades and LK65-BN (with Alabaster glass) light kit. Shown with Mahogany blades.



Features:

- 52X Decor-Match™ blades **(Included)**
- Decor-Match blade options available. Recommend 44", 52" blades.
- Flush mount capability
- LK65 light kit **(Included)**
- 188 X 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 22.3 lb

Options not included:



- Full function remote control requires purchase of RCR - receiver, RC2 - housing
- RCT - Remote Control Transmitter or
 - 2WWC - Select Touch Wall Transmitter



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1829.00	11.30	161
High	5120.00	54.00	94

GMRP-CW

Chalk White fan comes with 52XCW Chalk White blades and LK65-CW (with Alabaster glass) light kit.



GMRP-ORB

Oil Rubbed Bronze fan comes with 52XDW/ORB combination Dark Walnut/Oil Rubbed Bronze blades and LK65-ORB (with Alabaster glass) light kit (Shown with Dark Walnut blades)




GMRP-ORB

Oil Rubbed Bronze fan comes with 52XDW/ORB combination Dark Walnut/Oil Rubbed Bronze blades and LK65-ORB (with Alabaster glass) light kit (Shown with Oil Rubbed Bronze blades)



Lafayette™ (UNIPACK)

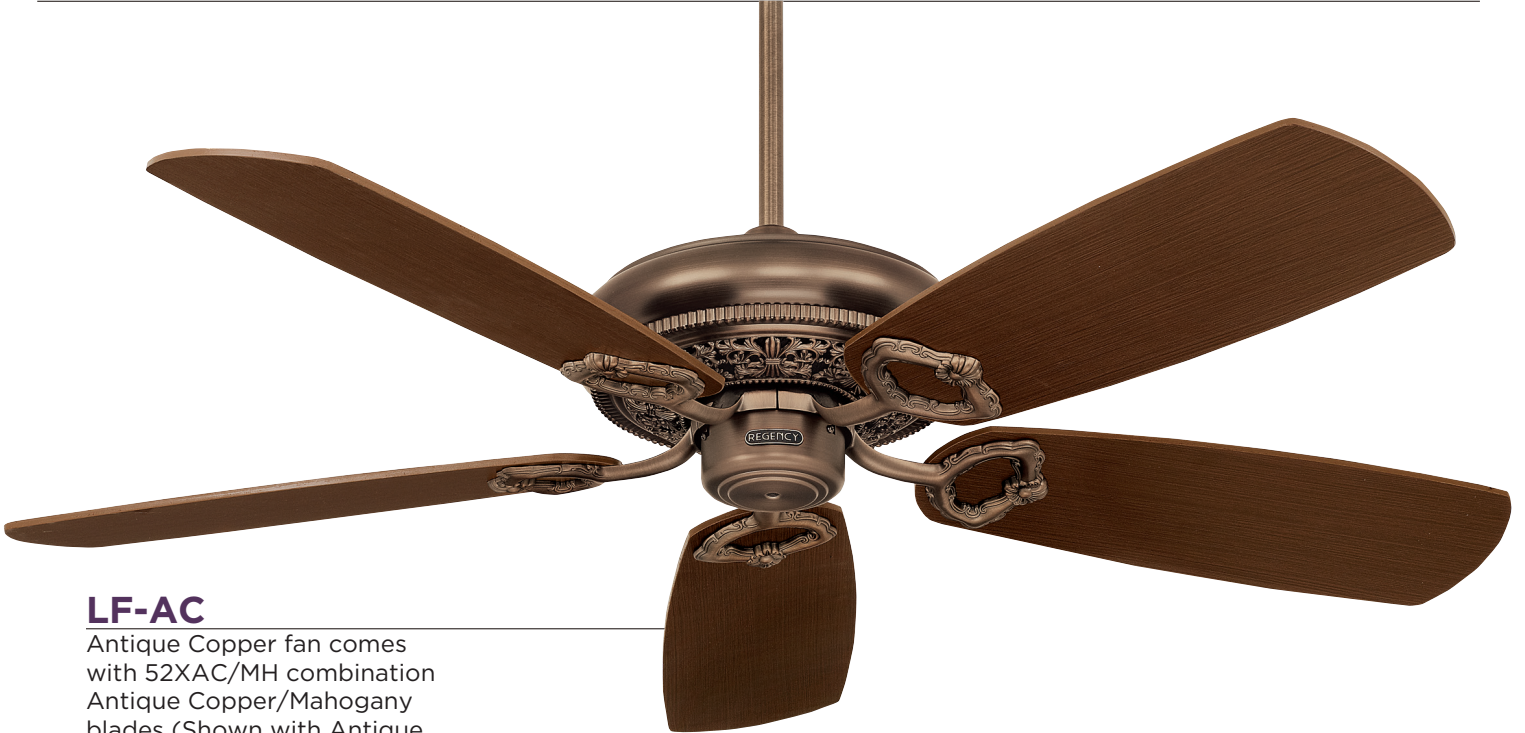

LF-AC

Antique Copper fan comes with 52XAC/MH combination Antique Copper/Mahogany blades (Shown with Antique Copper blades)

Features:

- Light kit adaptable
- 52X Decor-Match™ blades **(Included)**
- Decor-Match blade options available. Recommend 44", 52" and designer blades.
- Flush mount capability
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 29 lb

Options not included:


- Full function remote control requires purchase of RCR - receiver, RC2 - housing
- RCT - Remote Control Transmitter or
 - 2WWC - Select Touch Wall Transmitter



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1620.00	9.90	163
High	5617.00	66.00	85

LF-ORB

Oil Rubbed Bronze fan comes with 52XDW/ORB combination Dark Walnut/Oil Rubbed Bronze blades (Shown with Oil Rubbed Bronze blades)

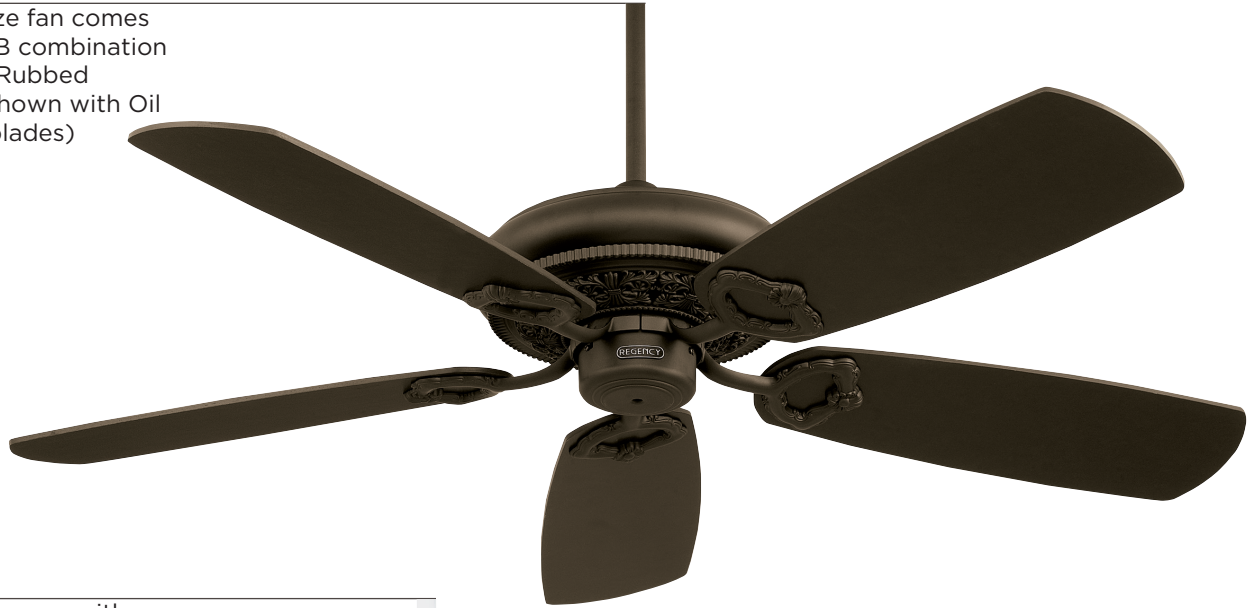

LF-CW

Chalk White fan comes with 52XCW Chalk White blades



LF-BN

Brushed Nickel fan comes with 52XCR/MH combination Cherry/Mahogany blades (Shown with Mahogany blades)



Envoy™ with Mood Glow™ Uplight (UNIPACK)



EN2-ORB

Oil Rubbed Bronze fan comes with 52XDW/ORB combination Dark Walnut/Oil Rubbed Bronze blades (Shown with Oil Rubbed Bronze blades)

Features:

- Light kit adaptable
- 52X Decor-Match™ blades **(Included)**
- Decor-Match blade options available. Recommend 44", 52" and designer blades.
- Mood Glow Uplight
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 33°, 8/12 pitch
- 4 x 25W candelabra (E12) upper light (included)*
- Box weight 19.8 lb

*replacement bulb - LX-bulb

Options not included:

- Full function remote control requires purchase of RCRD - receiver, RC2 - housing
- RCTD - Remote Control Transmitter
- or
- 2WWCD - Select Touch Wall Transmitter



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2544.00	13.00	191
High	5655.00	69.00	82


EN2-CW

Chalk White fan comes with
52XCW Chalk White blades



EN2-BN

Brushed Nickel fan comes with 52XCR/
MH combination Cherry/Mahogany blades
(Shown with Mahogany blades)

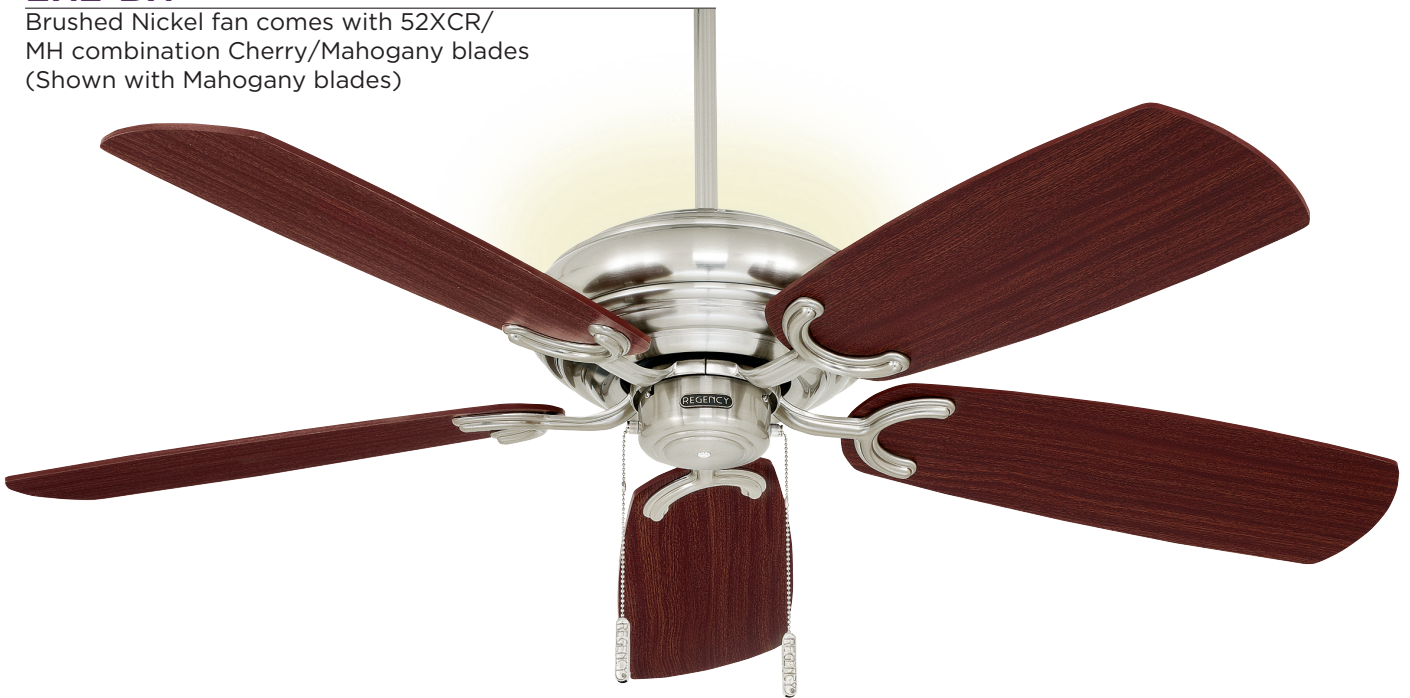

Marquis™ (UNIPACK)

MR2-BN

Brushed Nickel fan comes with 52XCR/MH combination Cherry/Mahogany blades (Shown with Cherry blades and LK9-BN light kit)



MR2-BB

Burnished Brass fan comes with 52XDG/LG combination Walnut/Medium Oak blades (Shown with Walnut blades and LK82 LED light kit)



Features:

- Light kit adaptable
- 52X Decor-Match™ blades **(Included)**
- Decor-Match blade options available Recommend 44", 52" and designer blades.
- Flush mount capability
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 21.6 lb

Options not included:

- Full function remote control requires purchase of RCR - receiver, RC2 - housing
- RCT - Remote Control hand held Transmitter or
- 2WWC - Select Touch Wall Transmitter



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1829.00	11.30	161
High	5210.00	54.00	95





MR2-ORB

Oil Rubbed Bronze fan comes with 52XDW/ORB combination Dark Walnut/Oil Rubbed Bronze blades (Shown with Oil Rubbed Bronze blades)



MR2-SS

Satin Steel fan comes with 52XCR/MP combination Cherry/Maple blades (Shown with Cherry blades and LK9-SS light kit)



MR2-AW

Appliance White fan comes with 52XAW Appliance White blades



MR2-AC

Antique Copper fan comes with 52XAC/MH combination Antique Copper/Mahogany blades (Shown with Antique Copper blades)



MR2-MB

Matte Black fan comes with 52XMB Matte Black blades



MR2-CW

Chalk White fan comes with 52XCW Chalk White blades

Countess™ (UNIPACK)


CT-BN

Brushed Nickel fan comes with 42XCR/MH combination Cherry/Mahogany blades (Shown with Cherry blades)




CT-AW

Appliance White fan comes with 42XAW Appliance White blades

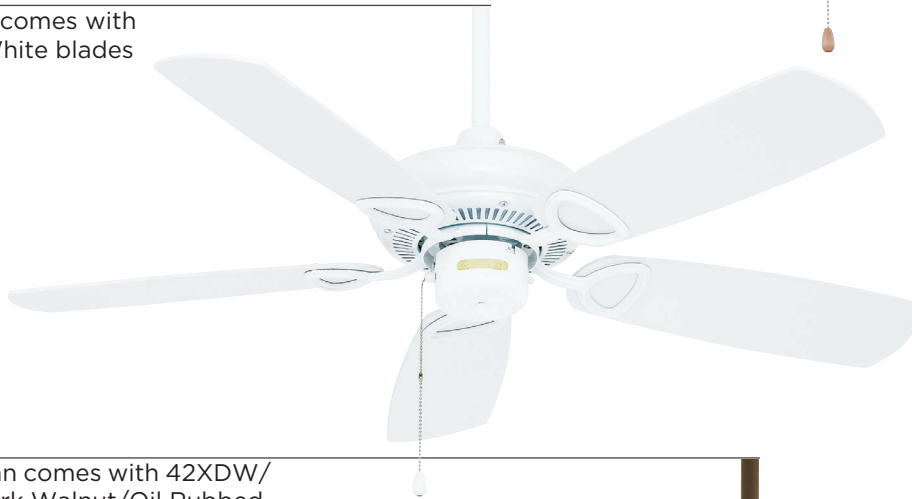

CT-ORB

Oil Rubbed Bronze fan comes with 42XDW/ORB combination Dark Walnut/Oil Rubbed Bronze blades (Shown with Oil Rubbed Bronze blades)

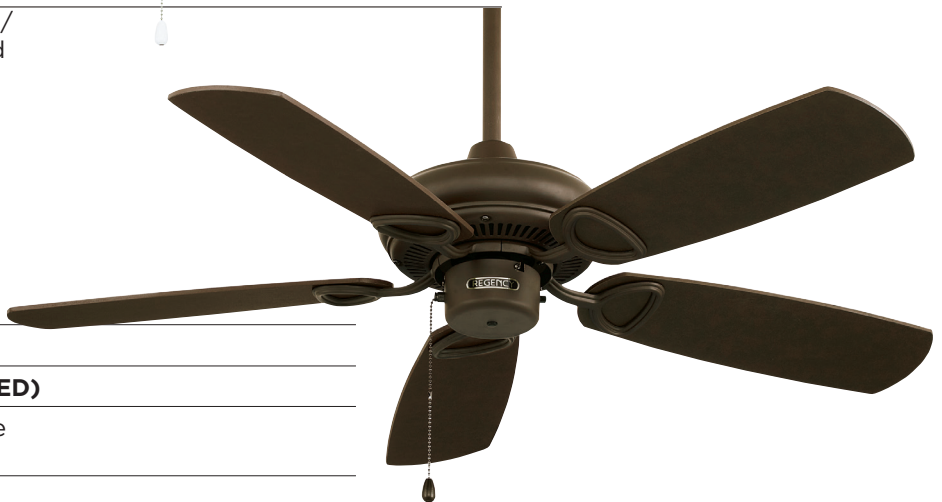

Features:

- Light kit adaptable
- 42X Decor-Match™ blades **(INCLUDED)**
- Decor-Match blade options available. Recommend 27", 36", 42" blades.
- Flush mount capability
- 153 x 10mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 15 lb


Options not included:

- Universal Remote Control (URC)
- Select Touch Wall Transmitter (2WWC)



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1135.00	10.60	107
High	3185.00	49.00	65



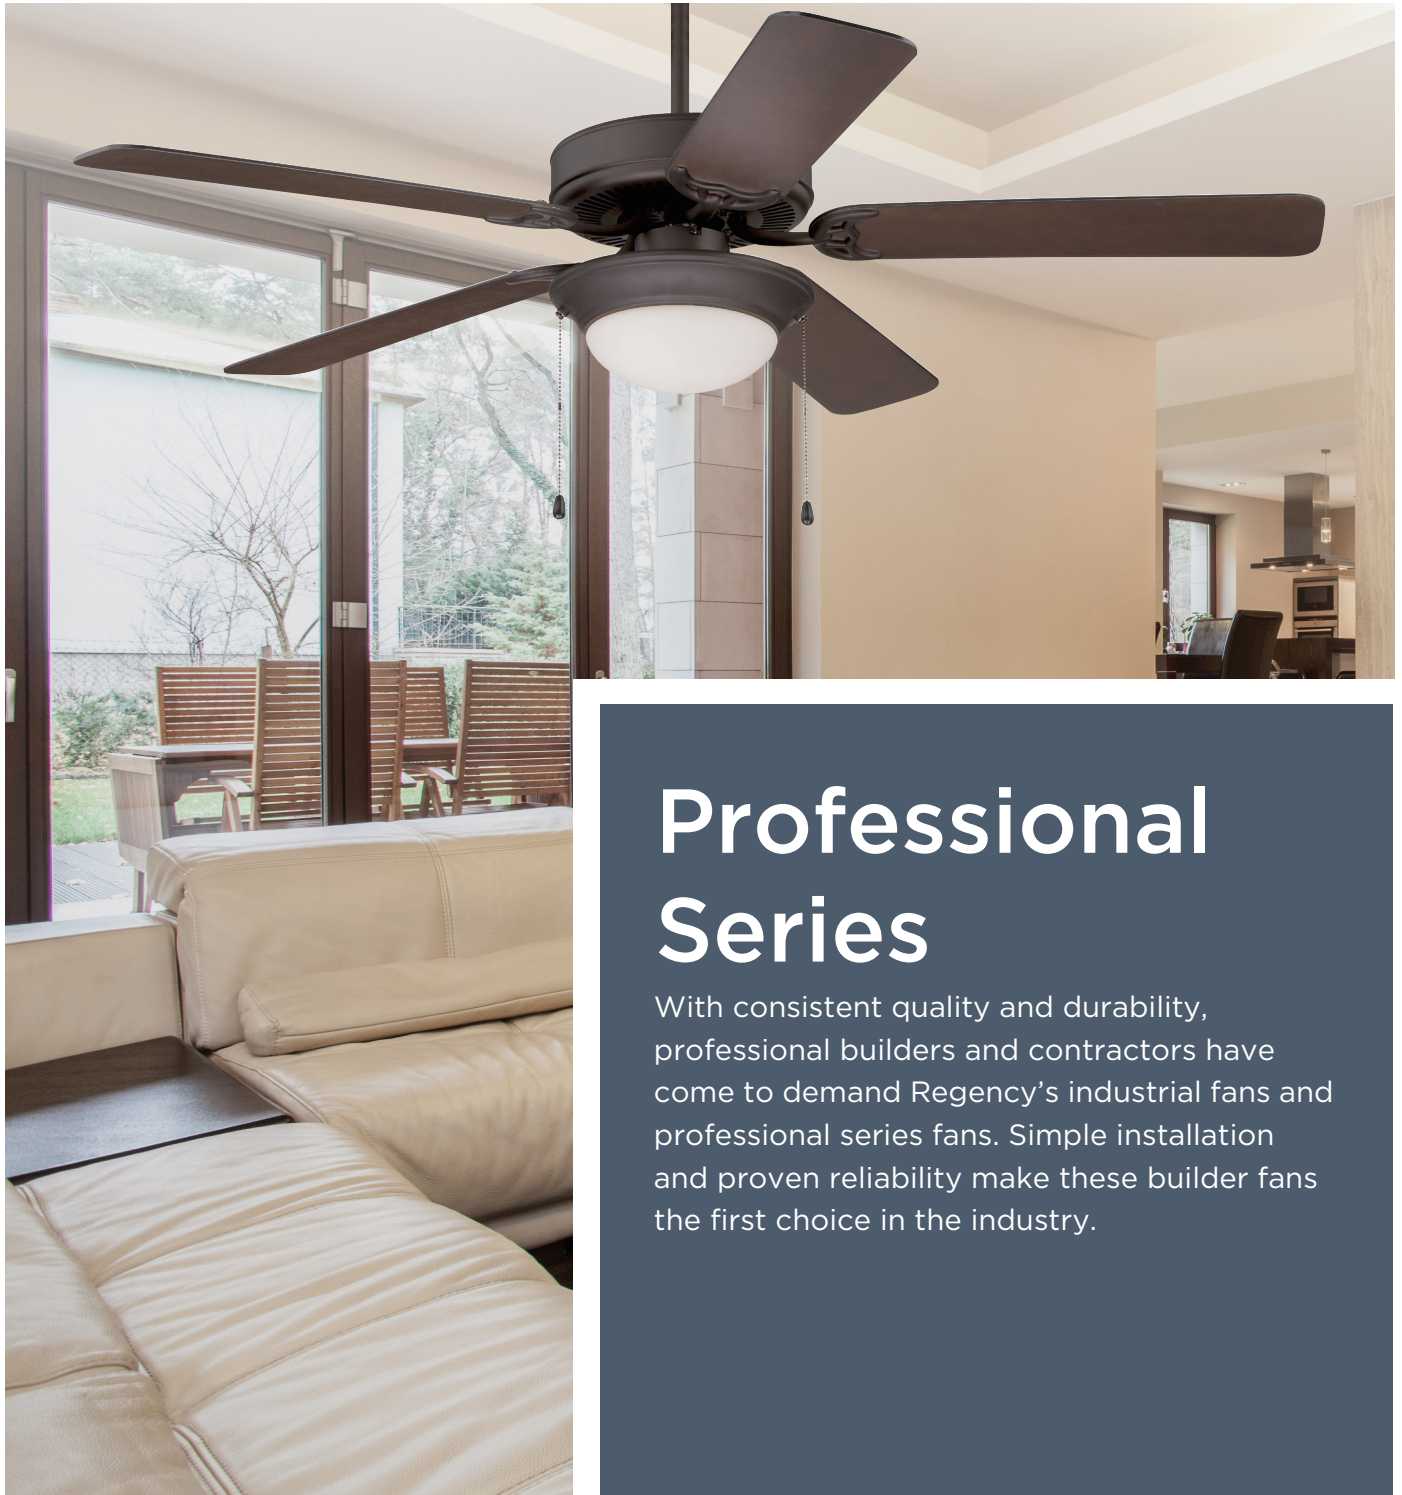

Professional Series

With consistent quality and durability, professional builders and contractors have come to demand Regency's industrial fans and professional series fans. Simple installation and proven reliability make these builder fans the first choice in the industry.





PFLK10-CW

Chalk White fan comes with
Chalk White blades and light kit
(all ENERGY STAR)



Professional Series Fan

With Low Profile Light Kit Included

PFLK10-CW

Chalk White fan comes with Chalk White blades and light kit (all ENERGY STAR)



PFLK10-ORB

Oil Rubbed Bronze fan comes with combination Oil Rubbed Bronze/Dark Walnut blades and light kit (all ENERGY STAR)



PFLK10-SS

Satin Steel fan comes with combination Silver/Cherry blades and light kit (all Energy Star)



Features:

- 52" blades **(Included)**
- Energy Star light kit with White Opal glass included, 2 x 13W GU-24 CFL
- 153 x 15mm motor
- 3-speed, manual reversing from fan switch
- Detachable switch housing
- Triple capacitor
- 12° blade pitch
- 4" downrod included
- Flush mount capability
- 6 ft. hookup wires
- Mounts to sloped ceilings up to 28°, 6/12 pitch
- Box weight 17 lb

Options not included:

- Universal Remote Control (URC-WLES)



Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2256.00	9.40	240
High	5265.00	56.5	93



Professional Series Fan

With Light Kit Included


PFLK41-ORB

Oil Rubbed Bronze fan comes with combination Oil Rubbed Bronze/Dark Walnut blades and light kit (Amber glass)



PFLK41-EB

Bronze fan comes with combination Oil Rubbed Bronze/Dark Walnut blades and light kit (White glass)

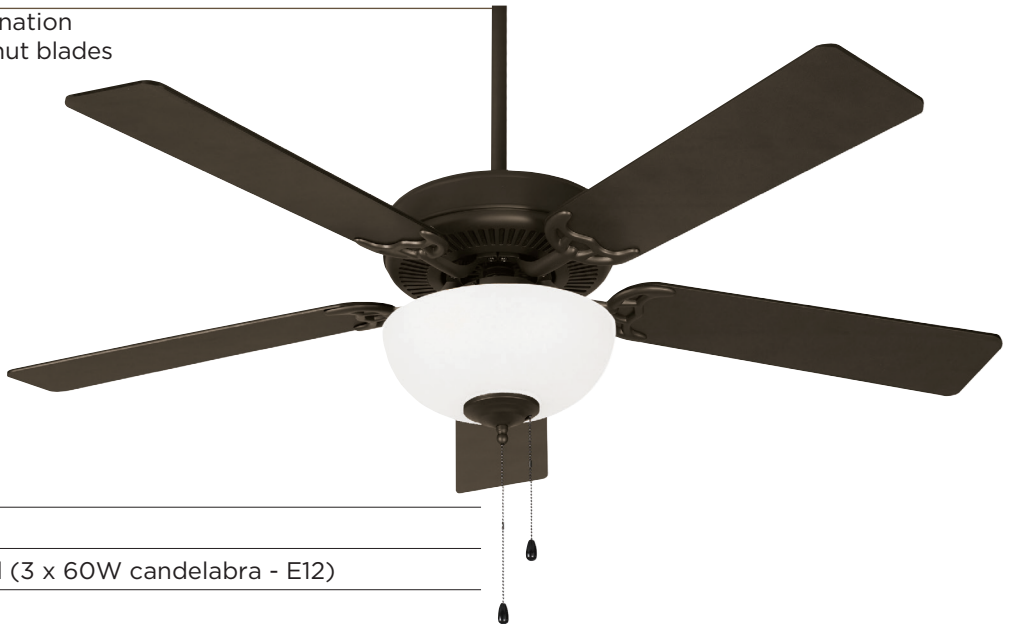

Features:

- 52" blades **(Included)**
- 180 watt light kit included (3 x 60W candelabra - E12)
- 153 x 12mm motor
- 3-speed, reversing
- Detachable switch housing
- Triple capacitor
- 12° blade pitch
- 4" downrod included
- Flush mount capability
- 6 ft. hookup wires
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 19.8 lb

Options not included:

- Universal Remote Control (URC)

Performance and Energy Information			
Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	1807	10	181
High	4570	59	78



PFLK41-AW

Appliance White fan comes with
Appliance White blades and light kit



PFLK41-SS

Satin Steel fan comes with combination
Silver/Cherry blades and light kit



PFLK41-CW

Chalk White fan comes with
Chalk White blades and light kit



Professional Series Fan

PFES52-ORB

Oil Rubbed Bronze fan comes with combination Oil Rubbed Bronze/Dark Walnut blades



PFES52-SS

Satin Steel fan comes with combination Silver/Cherry blades



Features:

- 52" blades **(Included)**
- 153 x 15mm motor
- 3-speed, reversing
- Detachable switch housing
- Triple capacitor
- 12° blade pitch
- 4" downrod included
- Light kit adaptable
- Flush mount capability
- 6 ft. hookup wires
- Mounts to sloped ceilings up to 28°, 6/12 pitch
- Box weight 17.6 lb



*42" Professional Series Fans

PF42-AW Appliance White fan comes with Appliance White blades

*NOTE: The 42" Professional Series fan is not ENERGY STAR rated.

Performance and Energy Information

Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
Low	2324	9.7	240
High	5820	62.3	93




Options:

- Universal Remote Control (URC) sold separately

PFES52-AW

Appliance White fan comes with
Appliance White blades

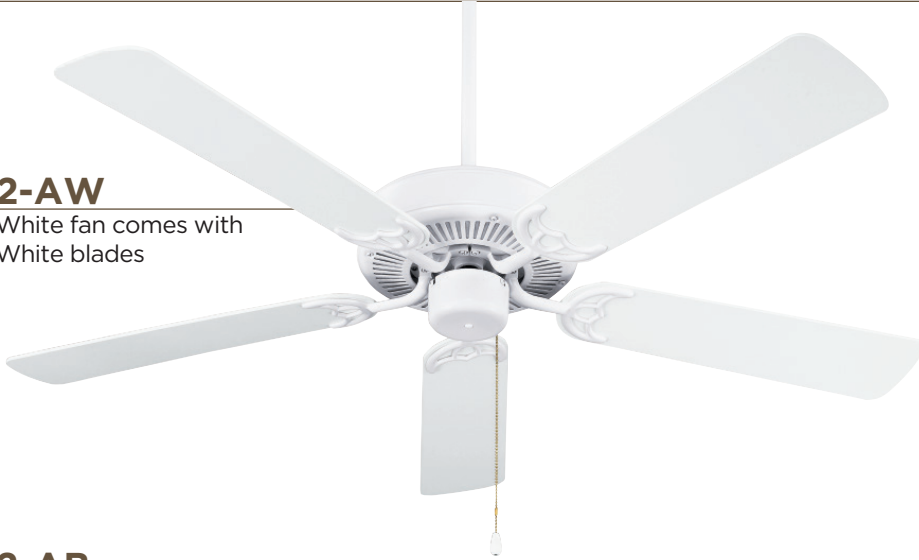

PFES52-AB

Antique Brass fan comes with
combination Walnut/Medium
Oak blades



PFES52-CW

Chalk White fan comes with
Chalk White blades



Industrial (FOR COMMERCIAL/INDUSTRIAL USE ONLY. NOT FOR RESIDENTIAL APPLICATION.)

IND-WH

White Industrial ceiling fan with three White 56" metal blades



Features:

- 188 x 15mm high torque motor
- 56" blade span
- 3 metal blades with trailing edge turned down
- 24" downrod included
- Single speed/300 RPM free run
- Current draw .75 AMPS
- Lead wires 6 foot
- Box weight 17.0 lb
- UL listed

Industrial ceiling fans rotate at higher speeds than most household ceiling fans. Their blades are also thinner and made of metal rather than wood. Severe injury can result if any part of the body comes in contact with the rotating blades. Regency industrial ceiling fans are not recommended for use in household applications. Can be connected to 120 volts only.

Cooling

Create a cooling breeze of air close to the floor area where most work is done. Hang the fans on long downrods, but at least 7-8 feet off the floor. Special applications may require even greater clearances. Circulate air without pulling hot air down from the ceiling. Since fans do not actually cool the air they move, use more fans per square foot area than the chart recommends.

Heat Reclamation

Best use is to reclaim heat trapped at the ceiling, often 20-40 feet above the floor where temperatures can vary as much as 20 degrees. Hang fans high, but at least 36" down from the ceiling to force warm air down into the working area.

IND-MB

Matte Black Industrial ceiling fan with three Matte Black 56" metal blades



IND-ORB

Oil Rubbed Bronze Industrial ceiling fan with three Oil Rubbed Bronze 56" metal blades



Uses Industrial Downrods
 I12-FINISH 12"
 I36-FINISH 36"
 I72-FINISH 72"

Effective area served by each fan installed for various ceiling heights:

Ceiling Height	Effective Sq. Ft. Area Served
20 ft.	3500
30 ft.	2800
40 ft.	1700



FC1AW-G* - White/Almond
 3-speed, fan control, 2-wire.
 *Includes white and almond knobs.



FCS-2 - White
 FCSA-2 - Almond
 FCSI-2 - Ivory
 4-speed sliding, fan control, 2-wire, 1.5 amp.

Performance and Energy Information

Fan Speed	Airflow (CFM)	Power Use (Watts)	Airflow Efficiency (CFM/Watts)
High	7820.3	74.00	105.7

Blades (52X Designer Blades for Regency's Decor-Match™ Fans)

Wide, exquisite wood blades are available in the most popular blade finishes. The 52X blades are the perfect complement to Regency's extensive collection of Decor-Match™ fan motors.



	52XAC (Antique Copper)		52XMB (Matte Black)
	52XCR (Cherry)		52XMH (Mahogany)
	52XCW (Chalk White)		52XORB (Oil Rubbed Bronze)
	52XDF (Driftwood)		52XSS (Satin Steel)
	52XDW (Dark Walnut)		52XTK (Teak)

Blades (Designer Blades for the Gladiator Fans)

Thicker and wider than Regency's standard wood blades, the 60" TB60 blades offer the perfect proportions for the powerful Gladiator fans. Select from many different fan finishes to complement any style and décor.



	TB60-AC (Antique Copper)		TB60-MB (Matte Black)
	TB60-AW (Appliance White)		TB60-MHS (Mahogany)
	TB60-CR (Cherry)		TB60-MP (Maple)
	TB60-CW (Chalk White)		TB60-ORB (Oil Rubbed Bronze)
	TB60-DG (Walnut)		TB60-SS (Satin Steel)
	TB60-DW (Dark Walnut)		TB60-TK (Teak)

Blades (Designer Blades for the Grander Fans)

Available in 60" and 72" sizes, these custom blades have been handcrafted specifically for the Grander fans. Select from many different blade finishes to customize the Grander fans to match any décor.

	GN60-AC GN72-AC (Antique Copper)
	GN72-CR (Cherry)
	GN60-CW GN72-CW (Chalk White)
	GN60-DW GN72-DW (Dark Walnut)
	GN60-MH GN72-MH (Mahogany)
	GN60-ORB GN72-ORB (Oil Rubbed Bronze)
	GN60-SS GN72-SS (Satin Steel)
	GN60-TK GN72-TK (Teak)

Blades (54" Carved Wood Blades)

Regency's Decor-Match™ wood designer blades have been meticulously carved by hand so that each blade is a unique work of art. The entire collection allows you to truly customize a ceiling fan to match your personal styles.




 A wooden blade with a smooth, teardrop shape and a central vein. It has a silver-colored metal ring at the base for mounting.	<p>WC52LG (Medium Oak)</p>
 A dark brown wooden blade with a detailed leaf-like texture, including a central vein and several side veins. It has a silver-colored metal ring at the base.	<p>WL52MH (Mahogany)</p>
 A light-colored wooden blade with a detailed leaf-like texture, including a central vein and several side veins. It has a silver-colored metal ring at the base.	<p>WL52NAT (Natural)</p>

Blades (Outdoor Blades ABS Plastic)




PP52WAL
52" Walnut

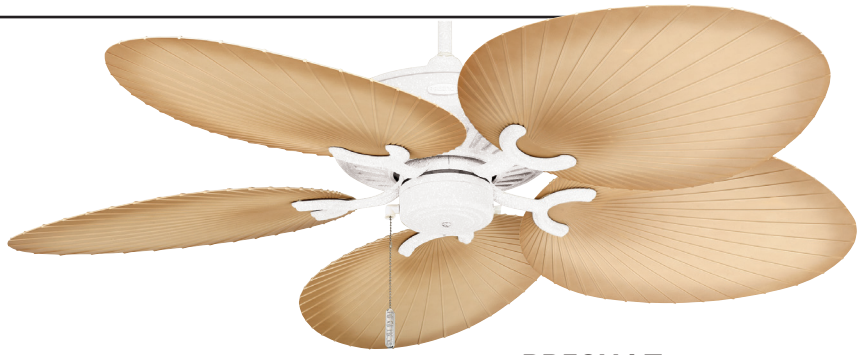

PP52NAT
52" Natural



PP52AW
52" Appliance White

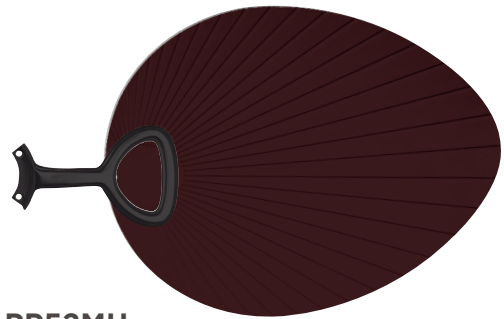


PP52MH
52" Mahogany


520AAW
52" Appliance White



520AWI
52" Matte Black



520AORB"
52" Oil Rubbed Bronze



Decor-Match™
SYSTEM

Blades (Outdoor Blades ABS Plastic)



PL52MHS
52" Mahogany




PL52AW
52" Appliance White



PL52NAT
52" Natural

52CMORB
52" Oil Rubbed Bronze

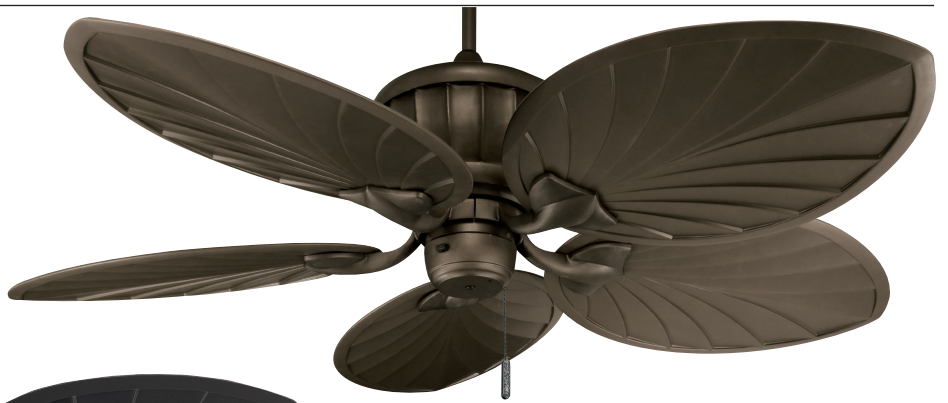

52CMMB
52" Matte Black

Blades (Decor-Match™ Blades)

	Size	Color	Description	Blade Tip	Finish		Size	Color	Description	Blade Tip	Finish
	52"	ACW	Antique Cherrywood	Square	Matte		52" 56"	MB	Matte Black	Square	Matte
	52" 56"	AC	Antique Copper	Square	Matte		44" 52" 56"	LG	Medium Oak	Pointed	Matte
	27" 36" 44" 52" 56"	AWS	Appliance White	Square	Matte		52" 56"	LGS	Medium Oak	Square	Matte
	44" 52" 56"	CW	Chalk White	Square	Matte		44" 52" 56"	ORB	Oil Rubbed Bronze	Square	Matte
	44" 52" 56"	CR	Cherry	Square	Matte		52"	SSS	Satin Steel	Square	Matte
	44" 52" 56"	DWS	Dark Walnut	Square	Matte		52" 56"	TK	Teak	Square	Matte
	52"	NAT	Light Natural Oak	Pointed	Matte		52"	UFS	Unfinished Oak	Square	Matte
	52"	NATS	Light Natural Oak	Square	Matte		52"	DG	Walnut	Pointed	Matte
	44" 52" 56"	MHS	Mahogany	Square	Matte		52"	WS	White	Square	Matte
	44" 52"	MP	Maple	Square	Matte						



Downrods



Downrods

Item: D(size)-(Finish)

Example: D12-BB — is 12" Burnished Brass Downrod.

Available Sizes: 12", 18", 24", 36", 48", 60" and 72" (available most colors)

Antique Brass	Antique Copper	Appliance White	Burnished Brass	Brushed Nickel	Chalk White	Driftwood	Liquid Nickel	Matte Black	Matte White	Oil Rubbed Bronze	Satin Steel
(AB)	(AC)	(AW)	(BB)	(BN)	(CW)	(DF)	(LN)	(MB)	(MW)	(ORB)	(SS)

Wet Location Downrods

- DL12-AW, BNW, DF, LN, MB, MW, ORB
- DL18-BNW, DF, LN, MW
- DL24-AW, BNW, DF, LN, MB, MW, ORB
- DL36-AW, BNW, DF, LN, MW, ORB
- DL48-BNW, DF, LN, MW
- DL60-BNW, DF, LN, MB, MW, ORB
- DL72-BNW, DF, LN, MW

LED Light Kits

Compatible with Many Popular Ceiling Fans



Features:

- Dimmable LED Light Kit with White Glass
- Three 4.5-Watt E12 LED bulbs
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 2700K Soft White Color Temperature
- Light Output is 1,500 Lumens
- Lifetime Estimate- 15,000 Hours
- Energy Efficient
- Width: 12"
- Height: 4-5/8"

Indoor Only



LK82-(finish)
(Caps and finials available in all colors: comes with BN)

CAPS-Finish

Caps and finials available separately in all Regency finishes.

LED Light Kits

Compatible with Many Popular Ceiling Fans



Indoor/ Outdoor Location



LK12W-AW
(Wet Location)



LK12W-BNW
(Wet Location)



LK12W-DF
(Wet Location)



LK12W-MB
(Wet Location)



LK12W-ORB
(Wet Location)

Features:

- Dimmable, 16-Watt LED Light Kit with White Glass
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 2700K Soft White Color Temperature
- Light Output Is 1,200 Lumens
- Lifetime to 70% Luminous Flux - 30,000 Hours
- Lifetime to 50% Luminous Flux - 50,000 Hours
- Energy Efficient
- Width: 11"
- Height: 4-7/8"

LED lights have a reputation for energy efficiency and a lifespan that outpaces traditional light bulbs by decades. Homeowners not only lower energy bills by upgrading incandescent bulbs to LED but, because LEDs last 25 times longer, they save even more by replacing bulbs less!

The Regency LED light kits give customers an attractive energy-saving lighting option—one of the first that's compatible with many different ceiling fans.

Indoor Only



LK12-AC



LK12-CW

LED Light Kits

Compatible with Many Popular Ceiling Fans



Features:

- Dimmable, 20-Watt LED Light Kit with White Glass
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 2700K Soft White Color Temperature
- Light Output Is 1700 Lumens
- Comparable to 100-Watt Incandescent Bulb
- Lifetime to 70% Luminous Flux - 35,000 Hours
- Lifetime to 50% Luminous Flux - 50,000 Hours
- Energy Efficient
- Width: 13.5"
- Height: 4"

Indoor
Only



LK270-CW



LK270-SS

Features:

- Dimmable, 21-Watt LED Light Kit with White Glass
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 3000K Soft White Color Temperature
- Light Output Is 1800 Lumens
- Comparable to 100-Watt Incandescent Bulb
- Lifetime to 70% Luminous Flux - 30,000 Hours
- Lifetime to 50% Luminous Flux - 50,000 Hours
- Energy Efficient
- Width: 13.5"
- Height: 4.75"

Indoor
Only




LK272-AC

Indoor/Outdoor
Location



LK272W-AW
(Wet Location)



LK272W-BNW
(Wet Location)



LK272W-ORB
(Wet Location)

Light Kits

CAPS-Finish

Caps and finials available separately in all Regency finishes.

Photos for light kit style only.

Light kit may not be available in color shown.



LK9-(finish)
10"W x 3-1/2"H, (2-60W E12)
Available in: AB, AW, BB, BN, CW, ORB, SS



LK9A-(finish) (Amber Glass)
10"W x 3-1/2"H, (2-60W E12)
Available in: ORB



LK14-(finish)
12"W x 3-1/2"H, (1-100W JDE 11)
Available in: AW, BN, CW, ORB, SS



LK14A-(finish) (Amber Glass)
12"W x 3-1/2"H, (1-100W JDE 11)
Available in: AC, ORB



LK32A-(finish) (Amber Glass)
14"W x 6-1/4"H, (3-60W E12)
Available in: ORB



LK41P
11"W x 5"H, (3-60W E12)
Caps and finials available in all colors; comes with AW



LK41P-A (Amber Glass)
11"W x 5"H, (3-60W E12)
Caps and finials available in all colors; comes with ORB



LK54
12"W x 7-1/2"H, (3-60W E12)
Caps and finials available in all colors; comes with AW



LK54A (Amber Glass)
12"W x 7-1/2"H, (3-60W E12)
Caps and finials available in all colors; comes with ORB



LK60-(finish)
12-1/2"W x 5-1/2"H, (3-60W E12)
Available in: AW, BN, CW, ORB, SS



LK60A-(finish) (Amber Glass)
12-1/2"W x 5-1/2"H, (3-60W E12)
Available in: AC, ORB



LK65-(finish)
12-1/2"W x 5"H, (3-60W E12)
Available in: AW, BB, BN, CW, DI, SS



LK65A-(finish) (Amber Glass)
12-1/2"W x 5"H, (3-60W E12)
Available in: AC, ORB



LK80-(finish)
12"W x 4-5/8"H, (3-60W E12)
Caps and finials available in all colors; comes with BN



LK80A-(finish) (Amber Glass)
12"W x 4-5/8"H, (3-60W E12)
Caps and finials available in all colors; comes with ORB



LK301T-(finish)
12"W x 6-1/2"H, (3-60W E12)
Available in: AW

Damp Location Light Kits



LK427D-(finish)
9-1/2"W x 6"H, (4-40W E12)
Available in: AW, ORB

Wet Location Light Kits



LK90W-(finish)
11"W x 5-3/8"H, (2-60W E12)
Available in: AW, BNW, DF, MB, ORB



LK95W-(finish)
10-1/8"W x 6"H, (2-13W E26)
Available in: AW, MB, ORB

Energy Saving Wet Location Light Kits




LK109ESW-(finish)
10-1/8"W x 5-7/8"H, (1-22W 2-Pin Circline Fluorescent)
Available in: AW

Fitters



F401N-AB
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-AW
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-BB
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-BN
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-CW
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-ORB
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-SS
12-1/2"W x 3-1/2"H,
(4-40W E12)

Glass Shades



G2100 Alabaster White Swirl
6"W x 5"H, (Set of 4)



G2100A Amber Glass
6"W x 5"H, (Set of 4)

Specialty Bulbs



LX-BULB
25 watt
(E12) base, clear



15W-E12
15 watt
(E12) base



60W-E12
60 watt candelabra
(E12) base



100WHJDE
100 watt "JDE"
(E11) base

Energy Saving LED with Driver




LK270LED Bulb
20 watt 2700K
LED with driver



LK272LED Bulb
21 watt 3000K
LED with driver



VTLED
16 watt 3000K
LED with driver



LK12LED
16 watt 2700K
LED with driver



LK82LED Bulb
LED bulb

Energy Saving Fluorescent Bulbs



13W-CFL
13 watt spiral CFL
(medium base)

Replacement Switches

RS-6

Ceiling fan reversing switch, 6-wire.




PC-2

On/Off 1 circuit switch (for light kit, fitters)



PC-3

A-On, A/B-On, B-On, Off (for light kits)



PC-4R*

For triple capacitor fan 4-wire terminals



*Universal speed control switches may not work with all brands/models of ceiling fans.

Pull Chains & Fobs



TSL1-304
Walnut



TSL4-304
White



TSL6-304
Light Oak



REGFOB-(finish)
AB, BR, GUN, SS

Ceiling Accessories

- LKCONV-BN
- LKCONV-CW
- LKCONV-ORB
- LKCONV-WH

Ceiling Mount Converter

Adapts light kits and fitters into ceiling fixtures



SCK-(finish)*

Sloped Ceiling Kit 48° Maximum slope

Available in: AC, AW, BN, CW, MB, ORB, SS

Uses 1/2" rod only

*Cannot be used with canopy mounted remote fans or with fans used outdoors!



Wall Controls - Fan and Light

OPTIONAL SELECT TOUCH WALL TRANSMITTERS

2WWC - White 2WWC-A - Almond

Full fan and light control using a standard 2-wire circuit. Works in place of a single circuit on/off wall switch. Controls 3 speeds, reverse, and light on/off, plus full range dimmer with memory. (Can be used with RCT transmitter.) (Single Fan Use)



SELECT TOUCH

2WWCD - White 2WWCD-A - Almond

Full fan and light control using a standard 2-wire circuit. Works in place of a single circuit on/off wall switch. Controls 3 speeds, reverse, and uplight and optional downlight independently with full range dimmer with memory. (Can be used with RCTD transmitter.) (Single Fan Use)



SELECT TOUCH

RECEIVER NEEDED



URC

RCR



RCRD



Colors:



white



almond



RC2




Fan	Page	2WWC - White 2WWC-A - Almond	2WWCD - White 2WWCD-A - Almond	RECEIVER NEEDED	Colors:
Andros*	18	X		included with fan	none
Artiste**	13		DCWC3 6-speed wall control	none	none
Artiste 2**	15		DCWC3 6-speed wall control	none	none
Bimini*	16	X		included with fan	none
Cabana*	25	X		URC-WL	none
Cayman*	19	X		URC-WL	none
Ciara*	24	X		URC-WL	none
Countess	52	X		URC	none
Deuce*	36	X		included with fan	none
Deuce Hugger	36	X		included with fan	none
Envoy	48-49		X	RCRD	RC2
Gladiator**	38-39		DCWC3 6-speed wall control	none	none
Grand Marquis	44-45	X		RCR	RC2
Grander**	28-29		DCWC3 6-speed wall control	none	none
Hover**	31		DCWC3 6-speed wall control	none	none
Lafayette (LF)	46-47	X		RCR	RC2
LX (LX2)	42		X	RCRD	RC2
Marquis	50-51	X		RCR	RC2
Module**	12		DCWC3 6-speed wall control	none	none
MX2	40-41	X		RCR	RC2
Nola	35	X		none	none
Oasis*	20-21	X		URC-WL	none
Patio Pro*	26	X		URC-WL	none
Spire*	17	X		included with fan	none
Tier*	11	X		included with fan	none
Trend	34	X		included with fan	none
Tropic Air*	18	X		URC-WL	none
Vail**	8-9		DCWC3 6-speed wall control	none	none
Vantage**	6-7		DCWC3 6-speed wall control	none	none
Vera Cruz*	22-23	X		URC-WL	none
Verge*	14	X		included with fan	none




* Fans must be put into reverse position manually from fan switch when using the 2WWC.




**Multiple fans not to be operated using a single handheld or wall controller.

National Electrical Code: Fans not using wall controllers must have external wall switch to control power.

Remote Controls - Fan and Light

		OPTIONAL FULL FUNCTION REMOTE CONTROL		
		Transmitter RCT	Receiver RCR	Receiver Housing RC2-(color)
Fan	Page			
Grand Marquis	44-45	X	X	X
Lafayette (LF)	46-47	X	X	X
Marquis	50-51	X	X	X
MX2	40-41	X	X	X

		OPTIONAL FULL FUNCTION REMOTE CONTROL (for fans with Mood Glow™ Uplight)		
		Transmitter RCTD	Receiver RCRD	Receiver Housing RC2-(color)
Fan	Page			
Envoy	48-49	X	X	X
LX (LX2)	42	X	X	X
Strasburg	30	X	included with fan	N/A

		OPTIONAL UNIVERSAL REMOTE CONTROL	OPTIONAL WET LOCATION UNIVERSAL REMOTE CONTROL
		Transmitter and Receiver URC*	Wet Location Transmitter and Receiver URC-WL*
Fan	Page		
			Transmitter and Receiver URC-WLES** For fans with fluorescent light kits (including wet location)
			
Cabana	25		X
Cayman	19		X
Ciara	24		X
Countess	52	X	X
Oasis	20-21		X
Patio Pro	26		X
Pro Series - 52"	58-59	X	X
Pro Series w/ LK10	54-55		X
Pro Series w/ LK41	56-57	X	X
Tropic Air	18		X
Vera Cruz	22-23		X

* Manual reversing from fan switch

** On/off light only - no dimming

Ceiling Fan Features & Specifications

Page	18	13	15	16	25	19	24	52
Fan	Andros (AD)	Artiste (AT)	Artiste 2 (AT2)	Bimini (BI)	Cabana (RC)	Cayman (CM)	Ciara (CI)	Countess (CT)
Designer Series	X	X	X	X			X	
Decor-Match™ System						X		X
Energy Star Rated								
Mood Glow™ Included								
Specially Designed Blades Included	X	X	X	X	X	X	X	X
Recommend 27", 36" and 42" Blades								X
Recommend 44", 52" and Designer Blades						X		
Recommend 52", 56" and Designer Blades								
Recommend GN60/72 Blades								
Recommend 56" and TB60 Blades								
Light Kit Included	X	X	X					
Light Kit Adaptable				X	X	X	X	X
Full Function Wall Control Included								
Full Function Remote Control Included		X	X					
Non-Reversing Wall Control Included*								
Non-Reversing Remote Control Included*	X			X				
Full Function Remote Control Adaptable								
Non-Reversing Remote Control Adaptable*					X	X	X	X
Downrod Length (inches)	4	6	6	4	4	4	4	4
Flush Mount Capability								X
Motor Size	172x20	DC-188	DC-188	188x22	153x10	188x15	172x14	153x10
Blade Pitch	14	14	14	14	14	14	13	14
CFM - Low Speed	2267	see chart on page 13	see chart on page 15	2846	1350	2235	1833	1135
CFM - High Speed	5387			6857	3520	5530	5270	3185
Watts - Low Speed	13.1			17	12	14	9.7	10.6
Watts - High Speed	59			72	47	75	61	49
CFM/Watt - Low Speed	173			167	125	159	199	107
CFM/Watt - High Speed	91			95	74	73	87	65
RPM - Low Speed	71			58	105	50	63	75
RPM - High Speed	165			158	200	160	175	172
Fan Motor Amp Rating	0.56			0.69	0.40	0.58	.80	0.41
Maximum Mounting Angle **	28			20	20	23	35	30
Measurement "A" (inches)	11.63	11.30	11.83	15.75	11	14.5	11.63	10.8
Measurement "B" (inches)	21	14.84	15.52	17.5	13	17	21	12.8
Box Weight (lb)	32	19.0	24.5	27.6	12.8	36.4	20	15
UL Listed Damp (D) or Wet (W) Location	W	D	W	W	W	W	W	

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 84

(Features and specifications subject to change without notice.)

Ceiling Fan Features & Specifications

Page	36	36	48-49	38-39	44-45	28-29	31	32-33
Fan	Deuce (DU)	Deuce Hugger (DH)	Envoy (EN2)	Gladiator (GL3)	Grand Marquis (GMRP)	Grander (GN)	Hover (HV)	Indy (IN)
Designer Series	X	X				X	X	X
Decor-Match™ System			X	X	X			
Energy Star Rated				X				
Mood Glow™ Included			X					
Specially Designed Blades Included	X	X	X		X			X
Recommend 27", 36" and 42" Blades								
Recommend 44", 52" and Designer Blades			X		X			
Recommend 52", 56" and Designer Blades								
Recommend GN60/72 Blades						X		
Recommend 56" and TB60 Blades				X				
Light Kit Included	X	X			X		X	
Light Kit Adaptable			X	X		X		
Full Function Wall Control Included								
Full Function Remote Control Included		X		X		X	X	
Non-Reversing Wall Control Included*								X
Non-Reversing Remote Control Included*	X							
Full Function Remote Control Adaptable			X		X			
Non-Reversing Remote Control Adaptable*								
Downrod Length (inches)	4	N/A	6	6	4	6	6	6
Flush Mount Capability		X			X			
Motor Size	153x22	153x22	188x15	DC-125	188x15	DC-165	DC-125	172x17
Blade Pitch	15	14	14	16	14	13.5	14	35
CFM - Low Speed	1773	1773	2544	see chart on page 39	1829	see chart on page 29	see chart on page 31	see chart on page 33
CFM - High Speed	5968	5968	5655		5120			
Watts - Low Speed	10	10	13		11.3			
Watts - High Speed	69	69	69		54			
CFM/Watt - Low Speed	177	177	191		161			
CFM/Watt - High Speed	86	86	82		94			
RPM - Low Speed	77	77	58		86			
RPM - High Speed	209	209	153		170			
Fan Motor Amp Rating	0.57	0.57	0.53		0.68			
Maximum Mounting Angle **	29		33	22	22	22	23	20
Measurement "A" (inches)	12.3	7.5	13.5	15.5	14.75	13.3	13.2	11.53
Measurement "B" (inches)	15.6	11.25	14.5	16	15.75	17	18	12.60
Box Weight (lb)	21.6	21.2	24.9	22.4	22.3	22	13.8	17.2
UL Listed Damp (D) or Wet (W) Location								

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 84

(Features and specifications subject to change without notice.)

Ceiling Fan Features & Specifications

Page	46-47	42	50-51	12	40-41	35	20-21
Fan	Lafayette (LF)	LX (LX2)	Marquis (MR2)	Module (MU)	MX2 (MX2)	Nola (NL)	Oasis (OA2)
Designer Series				X		X	
Decor-Match™ System	X	X	X		X		X
Energy Star Rated	X		X		X		X
Mood Glow™ Included		X					
Specially Designed Blades Included	X		X	X		X	X
Recommend 27", 36" and 42" Blades							
Recommend 44", 52" and Designer Blades	X		X				X
Recommend 52", 56" and Designer Blades		X			X		
Recommend GN60/72 Blades							
Recommend 56" and TB60 Blades							
Light Kit Included				X		X	
Light Kit Adaptable	X	X	X		X		X
Full Function Wall Control Included							
Full Function Remote Control Included				X		X	
Non-Reversing Wall Control Included*							
Non-Reversing Remote Control Included*							
Full Function Remote Control Adaptable	X	X	X		X		
Non-Reversing Remote Control Adaptable*							X
Downrod Length (inches)	6	6	4	6	3/6	N/A	4
Flush Mount Capability	X		X		X		
Motor Size	188x15	188x20	188x15	DC-125	188x22	172x15	188x15
Blade Pitch	14	14	14	13.5	16	14	14
CFM - Low Speed	1620	3300	1829	see chart on page 12	1985	1476	2276
CFM - High Speed	5617	6540	5210		6380	4133	6571
Watts - Low Speed	9.9	25	11.3		11	18.5	10
Watts - High Speed	66	72	54		78	64	69
CFM/Watt - Low Speed	163	133	161		180	80	228
CFM/Watt - High Speed	85	91	95		82	65	95
RPM - Low Speed	59	86	63		54	74	75
RPM - High Speed	162	170	170		166	149	182
Fan Motor Amp Rating	0.53	0.68	0.56		0.70	0.50	0.62
Maximum Mounting Angle **	22	33	22		17.5	22	N/A
Measurement "A" (inches)	15	14.75	14.75	11.81	14.75	8.75	12.75
Measurement "B" (inches)	15.25	15.75	15.75	14.94	15.5	12.875	14.5
Box Weight (lb)	29	19.8	21.6	18.10	19.8	22.5	22.3
UL Listed Damp (D) or Wet (W) Location				W			W

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 84

(Features and specifications subject to change without notice.)

Ceiling Fan Features & Specifications

Page	26	58	58-59	54-55	56-57	17	30
Fan	Patio Pro (VP2)	Pro Series 42" (PF42)	Pro Series 52" (PFES52)	Pro Series w/ LK (PFLK10)	Pro Series w/ LK (PFLK41)	Spire (SR)	Strasburg (ST)
Designer Series						X	X
Decor-Match™ System	X						
Energy Star Rated	X		X	X			
Mood Glow™ Included							X
Specially Designed Blades Included	X	X	X	X	X	X	X
Recommend 27", 36" and 42" Blades							
Recommend 44", 52" and Designer Blades	X						
Recommend 52", 56" and Designer Blades							
Recommend GN60/72 Blades							
Recommend 56" and TB60 Blades							
Light Kit Included				X	X	X	
Light Kit Adaptable	X	X	X				X
Full Function Wall Control Included							X
Full Function Remote Control Included							
Non-Reversing Wall Control Included*							
Non-Reversing Remote Control Included*						X	
Full Function Remote Control Adaptable							X
Non-Reversing Remote Control Adaptable*	X	X	X	X	X		
Downrod Length (inches)	4	4	4	4	4	6	6/12
Flush Mount Capability		X	X	X	X		
Motor Size	188x15	153x10	153x15	153x15	153x12	153x20	188x25
Blade Pitch	14	12	12	12	12	12	14
CFM - Low Speed	2325	1414	1679	2256	1807	2244	2740
CFM - High Speed	5871	2965	5100	5265	4570	4822	6105
Watts - Low Speed	11	11.4	9.8	9.4	10	11.70	22
Watts - High Speed	57	49.5	65.8	56.5	59	51.70	80
CFM/Watt - Low Speed	219	124	171	240	181	192	124
CFM/Watt - High Speed	103	60	78	93	78	93	76
RPM - Low Speed	56	112	73	65	60	76	62
RPM - High Speed	165	237	201	186	162	175	136
Fan Motor Amp Rating	0.54	0.42	0.55	.55	0.50	0.33	0.74
Maximum Mounting Angle **	35	28	28	28	22	20	25
Measurement "A" (inches)	11.38	11	11.5	10.25	11.75	13.04"	18.75
Measurement "B" (inches)	13.5	13	13.5	17.37	17.63	16.45"	24.5
Box Weight (lb)	15.4	12	15.2	17	19.8	22	38.6
UL Listed Damp (D) or Wet (W) Location	W					W	

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 84

(Features and specifications subject to change without notice.)

Ceiling Fan Features & Specifications

Page	10-11	34	18	8-9	6-7	22-23	14
Fan	Tier (TI)	Trend (TN)	Tropic Air (TA2)	Vail (VA)	Vantage (VT)	Vera Cruz (VC2)	Verge (VR)
Designer Series	X	X		X	X		X
Decor-Match™ System			X			X	
Energy Star Rated						X	
Mood Glow™ Included		X					
Specially Designed Blades Included	X	X		X	X	X	X
Recommend 27", 36" and 42" Blades							
Recommend 44", 52" and Designer Blades						X	
Recommend 52", 56" and Designer Blades			X				
Recommend GN60/72 Blades							
Recommend 56" and TB60 Blades							
Light Kit Included	X			X	X		X
Light Kit Adaptable			X			X	
Full Function Wall Control Included							
Full Function Remote Control Included		X		X	X		
Non-Reversing Wall Control Included*							
Non-Reversing Remote Control Included*	X						X
Full Function Remote Control Adaptable							
Non-Reversing Remote Control Adaptable*			X			X	
Downrod Length (inches)	6	6	6	6	6	4	6
Flush Mount Capability						X	
Motor Size	188x20	153x17	188x25	DC-125	DC-165	188x15	153x17
Blade Pitch	14	14	20	14	12.5	14	20
CFM - Low Speed	2500	1549	1100	see chart on page 9	see chart on page 7	2325	1615
CFM - High Speed	5718	4870	5530			5871	4930
Watts - Low Speed	18.00	12	13			11	9.10
Watts - High Speed	62.50	69	63			57	52.40
CFM/Watt - Low Speed	139	129	85			219	178
CFM/Watt - High Speed	92	71	88			103	94
RPM - Low Speed	70	59	46			56	60
RPM - High Speed	150	162	116			165	160
Fan Motor Amp Rating	0.33	0.55	0.54			0.54	0.33
Maximum Mounting Angle **	25	23	33			20	20
Measurement "A" (inches)	12.97	15	16	13.82	14	11.38	13.35
Measurement "B" (inches)	16.3	15	18	16.41	16.38	13.5	17.85
Box Weight (lb)	24.7	19.8	22	19.2	27	18.7	
UL Listed Damp (D) or Wet (W) Location	W		W	W	W	W	W


* **Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.**

** See Page 84

(Features and specifications subject to change without notice.)


Measurements (Inches)

- All measurements made using standard supplied downrod
- Measurement "A" is to bottom of edge of blade
- Measurement "B" is to bottom of light kit, if included with fan, otherwise to bottom of switch housing
- For multi-mount fans using close-up mounting, subtract 3-3/4" for fans with 4" downrods, 5-3/4" for fans with 6" downrods.

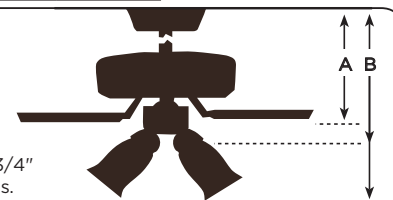

Room Size, Ceiling Height and Slope

Quality & Features That Make a Difference

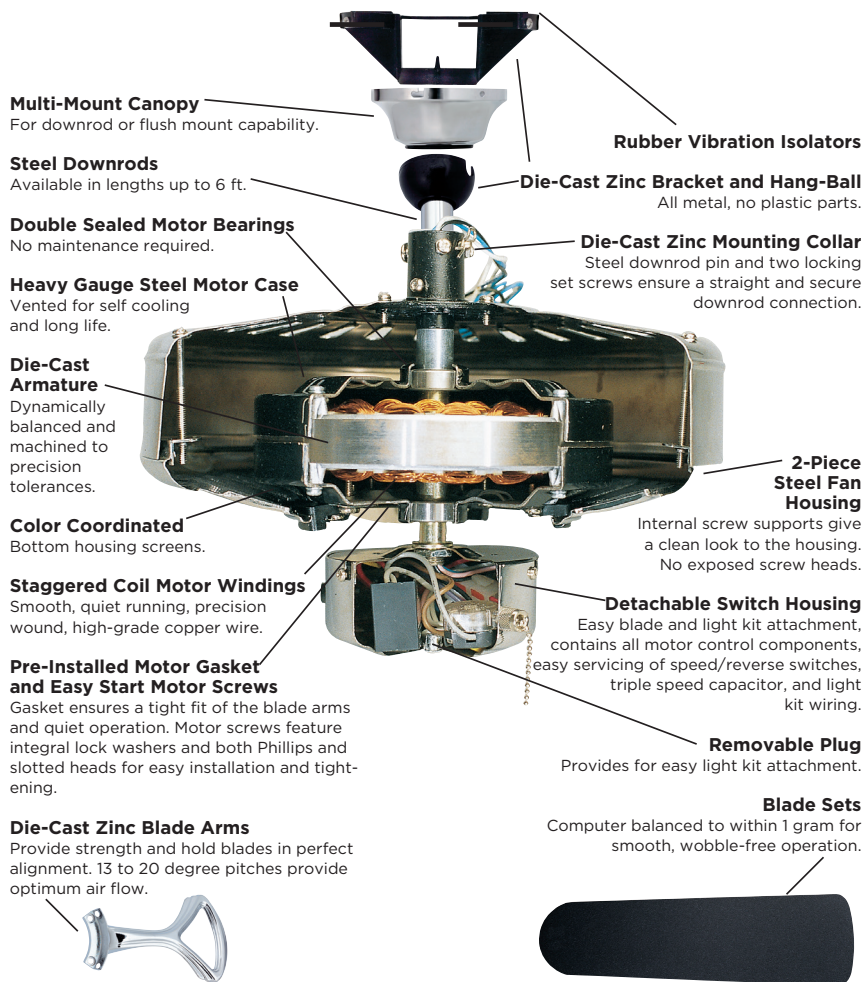


Year-Round Comfort

warmer weather

In the summer or hotter weather, operate the fan in the normal direction (counterclockwise). This creates a cooling breeze below the fan. The thermostat may then be raised, resulting in reduced energy consumption.


SUMMER: DOWN: Normal mode for creating a cooling breeze below the fan. (Counterclockwise)

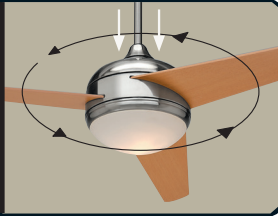

cooler weather

In the winter or colder weather, operate the fan in the slow speed in the reverse direction (clockwise). This redistributes the trapped warm air at the ceiling to provide even heat throughout the room. The thermostat may then be lowered for more efficient energy consumption.

WINTER: UP: Redistributes trapped warm air during winter months. (Clockwise)

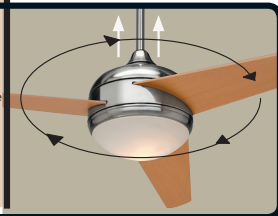



Supplied mounting brackets allow mounting on ceiling slopes from 22° (5/12 pitch), to 39° (10/12 pitch).

Degree = Ceiling Slope (Pitch)
4-8 degrees = 1/12 pitch
9-13 degrees = 2/12 pitch
14-17 degrees = 3/12 pitch
18-21 degrees = 4/12 pitch
22-25 degrees = 5/12 pitch
26-29 degrees = 6/12 pitch
30-32 degrees = 7/12 pitch
33-35 degrees = 8/12 pitch
36-38 degrees = 9/12 pitch
39-41 degrees = 10/12 pitch
42-44 degrees = 11/12 pitch
45 degrees = 12/12 pitch


Regency's optional slope kit shown on page 75 allows mounting on ceilings up to 45° (12/12 pitch). When using canopy installed remote controls, the maximum slope is restricted to 14° (3/12 pitch). Sloped ceiling kits are not adaptable to canopy installed remote control use.

A Regency Fan for Every Room Size

Blade Sweep	27", 36", 42"	44"	52"	56", 60"
Aproximate Room Size	6' x 8' 40-60 sq. ft.	8' x 10' 70-90 sq. ft.	10' x 12' 100-150 sq. ft.	12' x 15' (great room) over 160 sq. ft.

These measurements are for general air flow requirements only. Decorating plans or aesthetic considerations should influence your fan choices beyond these room size specifications. For very large rooms, multiple fans are also recommended.

What About Ceiling Height? Ceiling Height

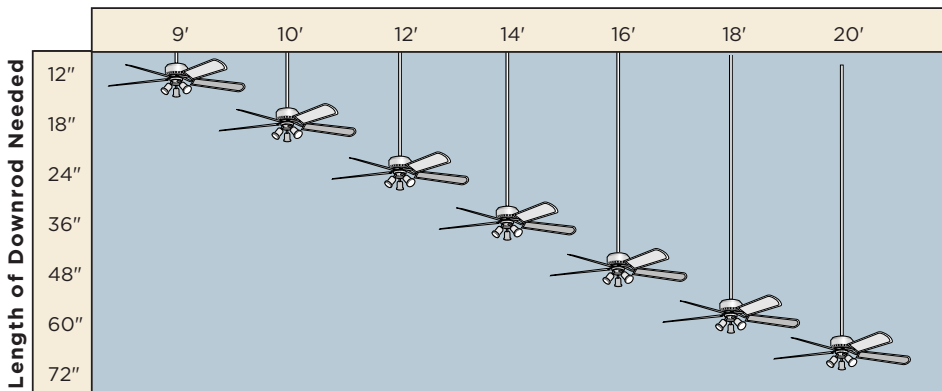

Be sure there is at least 7 feet of clearance under your ceiling fan blades. The standard 4"-6" downrod should work in most 8 ft. ceiling installations. This will position the blades far enough from the ceiling to have enough "supply" air above the blades to provide good air movement. If greater floor to fan clearance is needed, some fans can be mounted "close-up" without using any downrod. However, air movement is reduced using the close-up mounting. This chart shows recommended downrod lengths for various ceiling heights.


Light Kit Specifications

	Item	Description	Available Finishes	Width	Height	Bulbs	Max Watt	Lamp
LED Light Kits (Indoor Only)								
	LK12	LED White Glass	AC, CW	11"	4-7/8"	16 Watt LED		
	LK82	LED Very Low Profile White Glass	All, comes with BN	12"	4-5/8"	4.5 Watt LED		
	LK270	LED Very Low Profile Bowl White Glass	CW, SS	13-1/2"	4"	20 Watt LED		
	LK272	LED Very Low Profile Bowl White Glass	AC	13-1/2"	4-3/4"	21 Watt LED		
LED Light Kits (Indoor/Outdoor)								
	LK12W	LED Wet Location White Glass	AW, BNW, DF, MB, ORB	11"	4-7/8"	16 Watt LED		
	LK272W	LED Wet Location Very Low Profile Bowl White Glass	AW, BNW, ORB	13-1/2"	4-3/4"	21 Watt LED		
Damp Location Light Kits								
	LK427D	Damp Location 4-Light Spot	AW, ORB	9-1/2"	6"	4	40	E12
Wet Location Light Kits								
	LK90W	Wet Location Low Profile Bowl White Glass	AW, BNW, DF, MB, ORB	11"	5-3/8"	2	60	E12
	LK95W	Wet Location Low Profile Bowl White Glass	AW, MB, ORB	10-1/8"	6"	2	13	E26
Energy Saving Wet Location Light Kits								
	LK109ESW	Wet Location White Glass	AW	10-1/8"	5-7/8"	1	22	2 pin

Light Kit Specifications

	Item	Description	Available Finishes	Width	Height	Qty. Bulbs	Max. Watt	Lamp
	LK9	Low Profile Frosted Glass	AB, AW, BB, BN, CW, ORB, SS	10"	3-1/2"	2	60	E12
	LK9A	Low Profile Amber Glass	ORB	10"	3-1/2"	2	60	E12
	LK14	Low Profile Halogen	AW, BN, CW, ORB, SS	12"	3-1/2"	1	100	JDE 11
	LK14A	Low Profile Halogen Amber Glass	AC, ORB	12"	3-1/2"	1	100	JDE 11
	LK32A	Flat Metal Scroll Cradle Amber Glass	ORB	14"	6-1/4"	3	60	E12
	LK41P	White on White Swirl Glass	All, comes with AW	11"	5"	3	60	E12
	LK41P-A	Amber Glass	All, comes with ORB	11"	5"	3	60	E12
	LK54	Alabaster Curved White Glass	All, comes with AW	12"	7-1/2"	3	60	E12
	LK54A	Amber Curved Glass	All, comes with ORB	12"	7-1/2"	3	60	E12
	LK60	Low Profile Alabaster Bowl with Handcrafted Scrollwork	AW, BN, CW, ORB, SS	12-1/2"	5-1/2"	3	60	E12
	LK60A	Low Profile Amber Bowl with Handcrafted Scrollwork	AC, ORB	12-1/2"	5-1/2"	3	60	E12
	LK65	Very Low Profile Alabaster Bowl with Handcrafted Scrollwork	AW, BB, BN, CW, DI, SS	12-1/2"	5"	3	60	E12
	LK65A	Very Low Profile Amber Bowl with Handcrafted Scrollwork	AC, ORB	12-1/2"	5"	3	60	E12
	LK80	Very Low Profile Alabaster Bowl	All, comes with BN	12"	4-5/8"	3	60	E12
	LK80A	Very Low Profile Amber Bowl	All, comes with ORB	12"	4-5/8"	3	60	E12
	LK301T	3-Light Frosted Ribbed	AW	12"	6-1/2"	3	60	E12

Fitter Specifications

	Item	Description	Available Finishes	Width	Height	Bulbs	Max Watt	Lamp
	F401N	4-Light Bent Arm	AB, AW, BB, BN, CW, ORB, SS	12-1/2"	3-1/2"	4	40	E12

INDOOR/OUTDOOR DESIGNER SERIES FANS

Andros	
AD-ORB	18
Artiste	
AT-ORB	13
Artiste2	
AT2-ORB	15
AT2-BNW	15
AT2-MW	15
Bimini	
BIM-AW	16
BI-BNW	16
BIM-ORB	16
Cabana	
RC-AW	25
RC-ORB	25
Ciara	
CI-AW	24
CI-MB	24
CI-ORB	24
Cayman	
CM-AW	19
CM-ORB	19
Module	
MU-BNW	12
Oasis	
OA2-AW	20-21
OA2-DF	20
OA2-MB	21
OA2-ORB	21
Patio Pro	
VP2-AW	26
Spire	
SR-MW	17
SR-ORB	17
Tier	
TI-BNW	11
TI-ORB	11
Tropic Air	
TA2-ORB	18
Vail	
VA-AW	8
VA-BNW	8
VA-DF	9
VA-LN	9
VA-MB	9
VA-ORB	8

Vantage	
VT-AW	6
VT-BNW	7
VT-DF	6
VT-LN	6
VT-MB	7
VT-ORB	7
Verge	
VR-BNW	14
Vera Cruz	
VC2-MB	23
VC2-ORB	22

DESIGNER SERIES FANS

Cachet	
CA-BN	37
Deuce	
DU-BN	38
Deuce Hugger	
DH-MB	38
Freestar	
FS-SS	31
Grander	
GN-AC	29
GN-BN	29
GN-CW	29
GN-ORB	28
Hover	
HV-BN	31
Indy	
IN-BN	32
IN-EB	33
IN-MB	33
IN-MW	33
Nola	
NL-BN	35
NL-ORB	35
Strasburg	
ST-ORB	30
Trend	
TN-ORB	34

DECOR-MATCH™ SERIES FANS

Gladiator	
GL3-AC	38
GL3-BN	39
GL3-CW	39
GL3-ORB	39
GL3-SS	38
LX2	
LX2-BN	42
LX2-ORB	42
MX Excel (MX2)	
MX2-AC	40
MX2-AW	41
MX2-BB	41
MX2-BN	40
MX2-CW	41
MX2-MB	41
MX2-ORB	40
MX2-SS	41

Index

DECOR-MATCH™ UNIPACK SERIES FANS

Countess

CT-AW.....	52
CT-BN.....	52
CT-ORB.....	52

Envoy

EN2-BN.....	49
EN2-CW.....	49
EN2-ORB.....	48

Grand Marquis

GMRP-BN.....	44
GMRP-CW.....	45
GMRP-ORB.....	45

Lafayette (LF)

LF-AC.....	46
LF-BN.....	47
LF-CW.....	47
LF-ORB.....	47

Marquis

MR2-AC.....	51
MR2-BB.....	50
MR2-AW.....	51
MR2-BN.....	50
MR2-CW.....	51
MR2-MB.....	51
MR2-ORB.....	51
MR2-SS.....	51

PROFESSIONAL SERIES FANS

Industrial

IND-MB.....	61
IND-ORB.....	61
IND-WH.....	60

Professional Series

PFES52-AB.....	59
PFES52-AW.....	59
PFES52-CW.....	59
PFES52-ORB.....	58
PFES52-SS.....	58

Professional Series with Light Kit

PFLK41-AW.....	57
PFLK41-CW.....	57
PFLK41-EB.....	56
PFLK41-ORB.....	56
PFLK41-SS.....	57

Professional Series with Light Kit

PFLK10-CW.....	55
PFLK10-ORB.....	55
PFLK10-SS.....	55

BLADES

52X Designer Blades.....	62
54" Carved Wood Blades.....	65
Decor-Match™ Blades.....	68
Grander Designer Blades.....	64
Gladiator Designer Blades.....	63
Outdoor Blades.....	66-67

CEILING FAN LIGHTING

Damp Location Light Kits.....	73
Energy Saving Wet Location Light Kits.....	73
Fitters.....	74
Glass Shades.....	74
LED Light Kits.....	70-72
Light Kits.....	73
Wet Location Light Kits.....	73

FAN ACCESSORIES

Bulbs.....	75
Ceiling Accessories.....	75
Downrods.....	69
Pull Chains & Fobs.....	75
Remote Controls.....	78
Switches.....	75
Wall Controls.....	76-77

FEATURES AND SPECIFICATIONS

Ceiling Fan Features and Specifications.....	79-83
Fitter Specifications.....	86
Light Kit Specifications.....	85-86
Room Size, Ceiling Height and Slope.....	84



A division of Tacony Corporation
St. Louis • Jacksonville • Los Angeles
www.regencyfans.com

Features and Specifications
Subject To Change Without Notice

© 2018 Regency Ceiling Fans

Authorized Regency Dealer

LCCB-REG18