

2018 Introduction



LED Bath & Sconce ·······························2–25
LED Sconces + Swing Arms ······26–29
LED Pendants + Chandeliers ·······30–57
LED Ceiling Mounts
LED Outdoor ·······64–79

### Wand 31" and 38" LED Bath & Sconce




Add sparkle to your sanctuary with this exciting bath design, featuring miniature crystal beads that shimmer with light. It's a luxe touch, and energy-efficient too, thanks to state-of-the-art LED modules within.

Color Temp: CRI: Dimming (120V): Rated Life: Input:	3000K 90 100%–10% 0–10V; 100%–5% ELV & Triac 60,000 hours 120–277V	₩S-19831	op 4¾" ↦-2¾"
•	with crystalline beads vertically or horizontally	⊢−−−−−− 38" −−−−−−+	

• 3" x 1.25" x 1.13" universal voltage driver (120V-220V-277V) installs within a junction box

ADA compliant



TITLE 2

CALIFORNIA

DAMP

م ADA

	Size	Watt	LED Lumens	Delivered Lumens	Finish
WS-19831	31"	8W	845	584	CH Chrome
WS-19838	38"	11W	1163	854	


Example: WS-19831-CH

# Wand









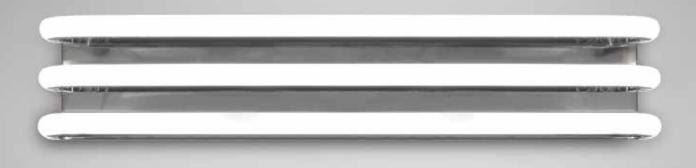

A subtly retro-inspired piece that's totally modern at the same time, Trio's evenly illuminated strips hover above a polished chrome backplate, creating an interesting yet understated accent in blissful bathrooms and commercial spas alike. Mount it over a vanity or vertically as a sconce.







WS-51837

	Size	Watt	LED Lumens	Delivered Lumens	Finish	
WS-51820	20"	20W	1522	1061		
WS-51828	28"	27W	2602	1821	CH Chrome	
WS-51837	37"	34W	3351	2346		

Example: WS-51828-CH

Color Temp:

**Dimming:** 

Rated Life:

ADA compliant

Input:

CRI:

3000K

100%-5% ELV;

75,000 hours


120–277V

100%-1% 0-10V

Three individual illuminating chrome plated elements

• Universal voltage driver (120V-220V-277V) concealed within fixture

90

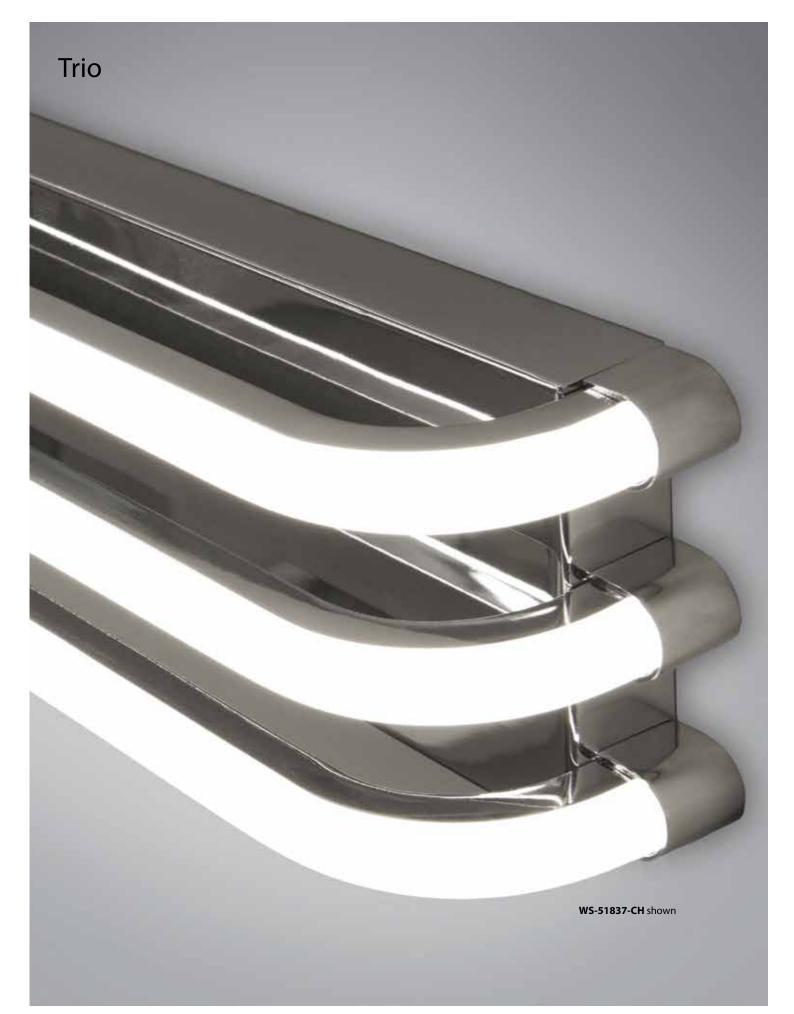

# Endure 20", 27" and 37" LED Bath & Sconce



Color Temp:	3000K
CRI:	90
Dimming:	100%–10% ELV
Rated Life:	83,000 hours
Input:	120–277V

Frosted edge-lit acrylic diffuser

Can be mounted vertically or horizontally
2.76" x 1.26" x 1.18" universal voltage driver (120V-220V-277V) installs within junction box 20" 4<sup>1</sup>/<sub>2</sub>" 4" WS-53820





	Size	Watt	LED Lumens	Delivered Lumens	Finish	
WS-53820	20"	20W	879	703		
WS-53827 WS-53837	27" 37"	25W 30W	1384 2040	1107 1632	WT White	

Example: WS-53827-WT

ADA compliant

# Endure

WS-53827-WT shown

A continuous band of even light wraps around a finely crafted aluminum structure like the Roman "Circus Maximus." Hollow in the center, this elegant family of sconces and vanities exhibits a refreshing combination of technology and modernity.

# Wedge 18" LED Bath & Sconce



ADA




A thin illuminated blade bisects a bent aluminum plate, suggesting kinetic energy and symmetry at the point of light. A clean, geometric design, Wedge works horizontally, vertically, or in a patterned display.

Color Temp:	3000K	
CRI:	90	
Dimming:	100%–5% ELV, 0-10V	
Rated Life:	50,000 hours	⊢6"⊣ ⊢+2"
Input:	120V	
• Can be mou	minum frosted edge-lit acrylic diffuser nted vertically, horizontally, at an angle or on ceiling <b>1.13" driver installs within junction box</b> ant	

	Size	Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-75818	18"	9W	535	417	AL	Brushed Aluminum	

Example: WS-75818-AL

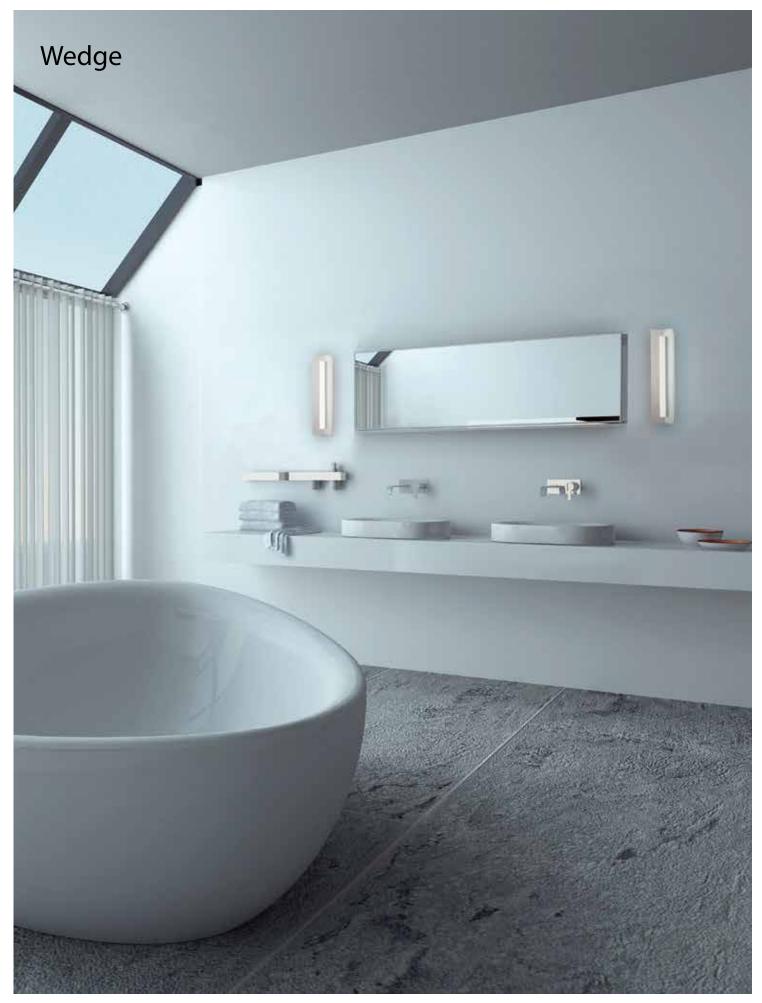

# Level 19", 25" and 37" LED Bath & Sconce

Now available in white



Adjustable backplate

 Color Temp:
 3500K

 CRI:
 90


 Dimming:
 100%–10% ELV

 Rated Life:
 85,000 hours

 Input:
 120–277V


• Half-inch edge-lit linear blade

- Frosted diffuser provides even illumination
- Adjustable back plate (see spec sheet for adjustable length)
- Conversion plate for 4" junction box included
- Can be mounted vertically or horizontally
- 19" version is ADA compliant
- 2.76" x 1.26" x 1.18" universal voltage driver (120V-220V-277V) installs within junction box



	Size	Watt	LED Lumens	Delivered Lumens	Finish
WS-85618	19"	15W	1300	865	
WS-85624	25"	20W	1735	1255	WT   White     AL   Brushed Aluminum
WS-85636	37"	30W	2561	1800	
Evample, WC 9		/Ŧ			

Example: WS-85618-WT

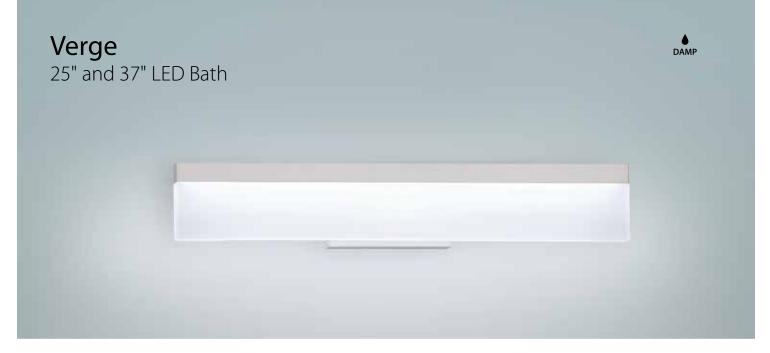

A vertical version of our handsome Level sconce, Verge features an ultra-thin frosted diffuser that helps to spread light evenly without any glare or hot spots.

Color Temp:	3500K		
CRI:	90		
D:	1000/ 50/ 50/		
Dimming:	100%–5% ELV		
Dimming: Rated Life:		·	
Rated Life:	100%–5% ELV 54,000 hours 120–277V	25"	<sup>↓</sup>
	54,000 hours	⊢25"	
Rated Life:	54,000 hours		
Rated Life: Input:	54,000 hours	⊢25"   WS-17825	
Rated Life: Input: • Half-inch fros	54,000 hours 120–277V		
Rated Life: Input: • Half-inch fros • Edge-lit LED	54,000 hours 120–277V sted acrylic linear blade		]
Rated Life: Input: • Half-inch fros • Edge-lit LED • Can be mour	54,000 hours 120–277V sted acrylic linear blade modules give an ambient effect	WS-17825	]
Rated Life: Input: • Half-inch fros • Edge-lit LED • Can be mour • 2.76" x 1.26	54,000 hours 120–277V sted acrylic linear blade modules give an ambient effect nted up or down	WS-17825	

	Size	Watt	LED Lumens	Delivered Lumens	Finish	١	
WS-17825	25"	20W	1180	1047	AL	Brushed Aluminum	
WS-17837	37"	30W	1809	1460	WT	White	


Example: WS-17825-WT

### Line 18", 24" and 36" LED Bath & Sconce Now available in brushed black



Uber-thin edge-lit LED panels provide a downward task light free of any hot spots as well as an upward ambient illumination. Even better, the design can be rotated around to provide direct or indirect illumination as the needs arise when installed in a bath.

Color Temp: CRI:	2700К, 3000К 90		$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & $
Dimming:	100%–10% ELV	WS-6718	
Rated Life:	80,000 hours	24%"	1 1
Input:	120V (277V special order)		→ 3¾" to 5½" ↓ 4½" ↓
Ultra-thin ligh	t-extraction panel and edge-lit acrylic diffuser	WS-6724	
	g panel for indirect, up, down or task lighting	361/8"	
	ted vertically or horizontally )2" transformer installs within junction box		
		WS-6736	

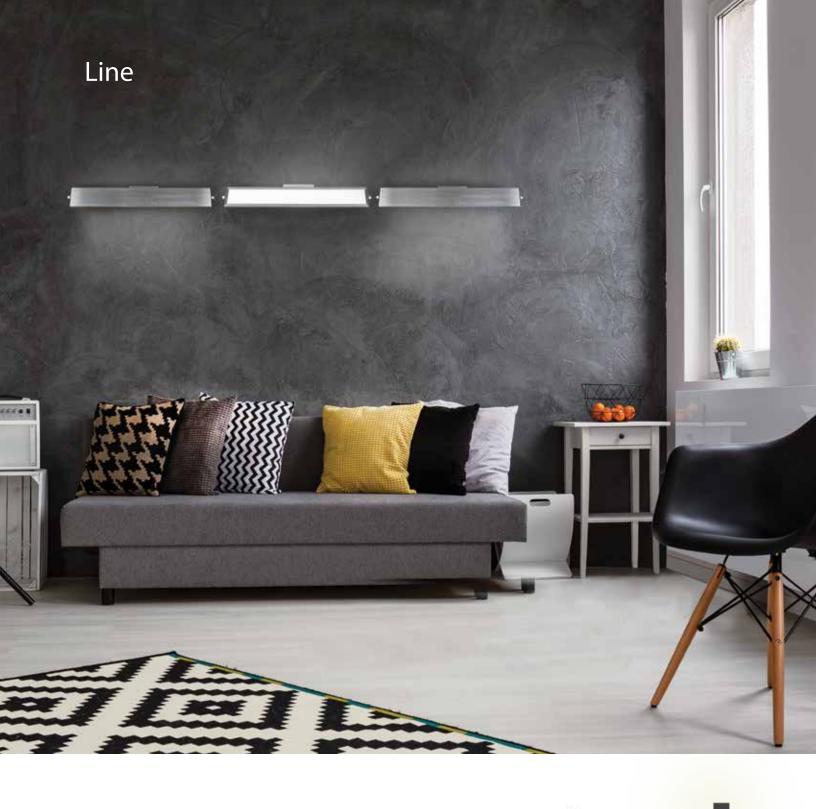

	Size	Watt	Color Temp	LED Lumens	Delivered Lumens	Finish	
WS-6718-27 WS-6718-30	18"	16W	2700K 3000K	1004 1109	770 850		
WS-6724-27 WS-6724-30	24"	22W	2700K 3000K	1339 1478	1035 1140	BK   Brushed Black     AL   Brushed Aluminum	
WS-6736-27 WS-6736-30	36"	29W	2700K 3000K	2009 2218	1380 1520		

13

1/2"

## Nightstick 19", 25", 37", 49", 61", 73" and 97" LED Wall & Ceiling


Color Temp:	3000K
CRI:	90
Dimming:	100%–10% El
Rated Life:	54,000 hours
Input:	120V


Co-extruded acrylic diffuser

Available in multiple sizes to meet numerous applications

N

- Decorative plate to cover up to a standard 4" junction box is included
- Can be mounted vertically, horizontally, at an angle or on ceiling
- Specially rated for installation in the storage area of a clothes closet
- No transformer or driver needed
- ADA compliant

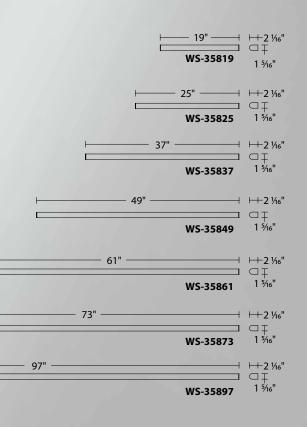

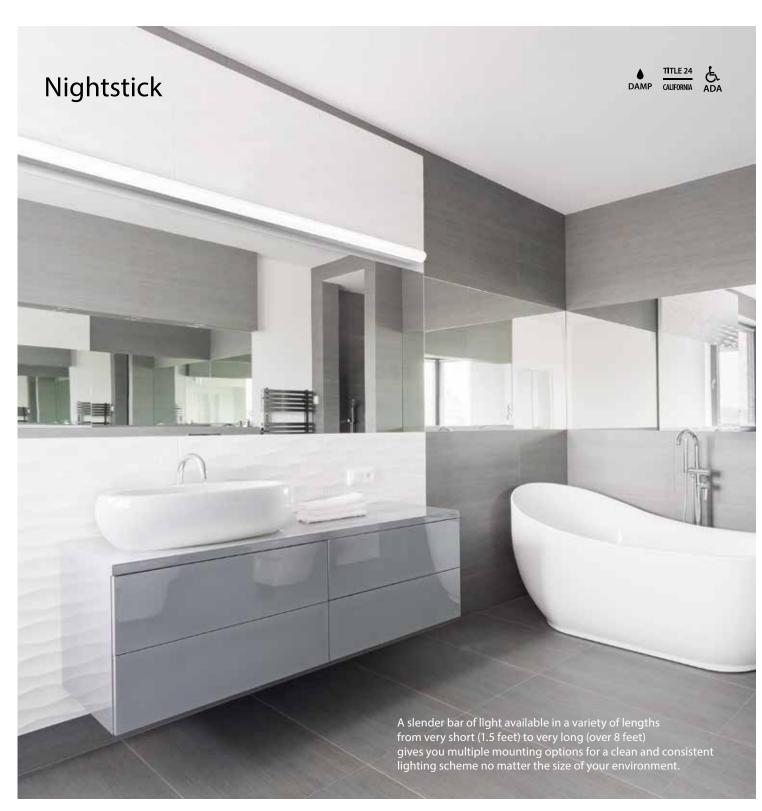

	Size	Watt	LED Lumens	Delivered Lumens	Finisł	ı	
WS-35819	19"	17W	1276	957			
WS-35825	25"	22W	1708	1324			
WS-35837	37"	34W	2585	2014			
WS-35849	49"	44W	3399	2617	WT AL	White Brushed Aluminum	
WS-35861	61"	53W	4213	3244			
WS-35873	73"	64W	4912	3782			
WS-35897	97"	84W	6458	4973			

Example: WS-35861-AL

# Brink

12", 18", 24" and 36" LED Bath & Sconce Now available in brushed brass




- Color Temp:
   2700K, 3000K, 3500K

   CRI:
   90


   Dimming:
   100%-5% ELV

   Rated Life:
   85,000 hours

   Input:
   120-277V
- Co-extruded acrylic diffuser
- Conversion plate for 4" junction box included
- Can be mounted vertically, horizontally or at an angle
- Adjustable backplate
- 2.76" x 1.26" x 1.18" universal voltage driver
- (120V-220V-277V) installs within junction box • ADA compliant







A beautiful bar of pure LED light radiates through the co-extruded acrylic diffuser for brighter illumination, and an adjustable back plate adds versatility to this design's many attributes. It's a clean modern sconce anywhere you mount it.

	Size	Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
WS-77612-27		2700K	10W	863	741	
WS-77612-30	12"	3000K	10W	905	767	
WS-77612-35"		3500K	10W	935	803	
WS-77618-27		2700K	15W	1155	910	
WS-77618-30	18"	3000K	15W	1225	1015	
WS-77618-35		3500K	15W	1330	1115	AL Brushed Aluminum
WS-77624-27		2700K	20W	1595	1330	BR Brushed Brass NEW
WS-77624-30	24"	3000K	20W	1720	1440	
WS-77624-35		3500K	20W	1785	1510	
WS-77636-27		2700K	30W	2365	1985	
WS-77636-30	36"	3000K	30W	2445	2095	
WS-77636-35		3500K	30W	2561	2180	

Example: WS-77636-30-BR

## Ratio 20", 30" and 40" LED Bath & Sconce





 Color Temp:
 3000K


 CRI:
 90

 Dimming:
 100%-10% ELV

 Rated Life:
 54,000 hours


 Input:
 120V (277V special order)

20" 27%" 5½" WS-99820



Co-extruded acrylic diffuser

- Perfectly even illumination end to end
- No transformer or driver needed
- ADA compliant



	Size	Watt	LED Lumens	Delivered Lumens	Finish	
WS-99820	20"	22W	1880	975		
WS-99830	30"	28W	2583	1371	CH Chrome	and the second second second
WS-99840	40"	36W	3100	1780		

#### Example: WS-99830-CH

For 277V special order, add an "F" before the finish: WS-99830F-CH



A thin band of chrome divides the light into even sections on this simple, sophisticated sconce, a reliable design full of bright, energy-efficient light perfect for both commercial and residential applications.

### **Bliss** 22", 28" and 36" LED Bath Now available in 28"

DAMP CALIFORNIA

ADA


 Color Temp:
 3000K (2700K / 3500K Special Order)

 CRI:
 90

 Dimming:
 100%-10% ELV

 Rated Life:
 50,000 hours\*

 Input
 120V (277V special order)




- Conversion plate for 4" junction box included
- Can be mounted vertically and horizontally
- No transformer or driver needed
- ADA compliant

		Size	Watt	LED Lumens	Delivered Lumens	Finish
	WS-79622	22"	25W	2390	1646	
NEW	WS-79628	28"	35W	3433	2333	PN Polished Nickel
	WS-79636	36"	39W	3472	2540	

Example: WS-79628-PN

For 277V special order, add an "F" before the finish: **WS-79622F-PN** For 2700K add "-27", 3500K add "-35" before finish: **WS-79622-35-PN** 





# **Esprit** 15", 26" and 38" LED Bath or Sconce

DAMP ADA



 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100%-10% ELV


 Rated Life:
 50,000 hours\*

 Input:
 120-277V

• Etched acrylic diffuser

• LED modules positioned closer to diffuser for broader spread of illumination

- 2.76" x 1.26" x 1.18" universal voltage driver (120V-220V-277V)
- installs within junction box
- ADA compliant



	Size	Watt	LED Lumens	Delivered Lumens	Finish	
WS-69815	15"	10W	845	636		
WS-69826	26"	20W	1784	1240	BN Brushed Nickel	
WS-69838	38"	30W	2712	2136		

Example: WS-69826-BN

# Esprit

With high-performance LED modules positioned closer to the diffuser, Esprit delivers a wider illumination that's perfect for fine bathrooms at luxury homes, hotels, restaurants and office buildings, all while maintaining a slim, geometric profile.

# Elementum

13", 22" and 30" LED Bath or Sconce Now available in brushed brass



Color Temp:	2700K (3000K & 3500K Special Order)
CRI:	90
Dimming:	100%–10% ELV
Rated Life:	54,000 hours
Input:	120V (277V special order)

Opal glass diffuser

- 22" and 30" versions may be mounted vertically or horizontally
- No transformer or driver needed
- ADA compliant

 4½"
 3½"

 4½"
 3½"

 4½"
 3½"

 13"
 13"


 13"
 13"

 WS-7213
 WS-7222

DAMP CALIFORNIA ADA



# Elementum

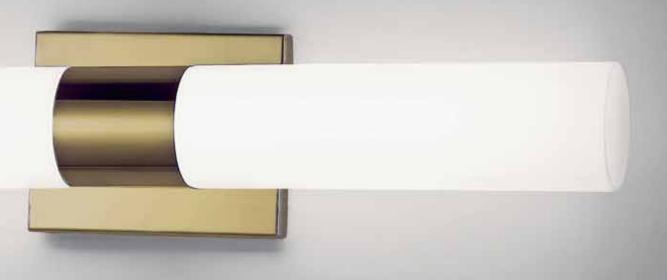


Updated with a warm brass finish, Elementum brings unparalleled task lighting into your bathroom, whether mounted vertically on either side of the mirror or above a vanity mirror for a flattering diffuse illumination.

	Size	Watt	LED Lumens	Delivered Lumens	Finish
WS-7213	13"	13W	1118	856	
WS-7222	22"	26W	2119	1559	BR Brushed Brass NEW BN Brushed Nickel
WS-7230	30"	31W	2404	1708	CH Chrome

Example: WS-7222-BR

For 277V special order, add an "F" before the finish: **WS-7222F-BR** For 3000K add "-30", 3500K add "-35" before finish: **WS-7230-35-CH** 

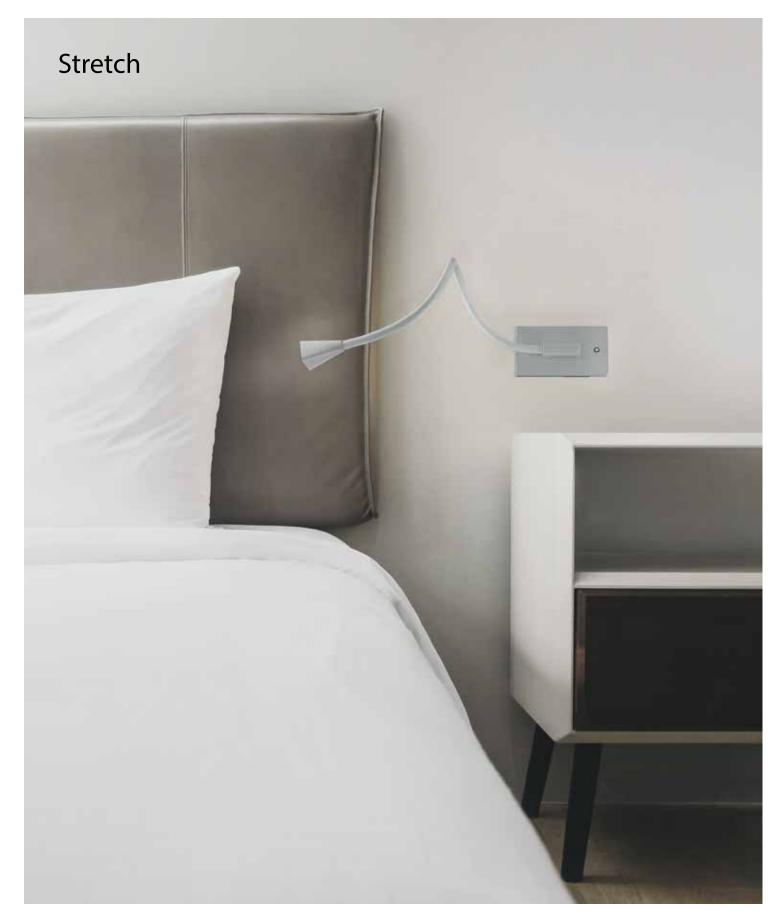

Fingertip-touch dimming and cutting-edge LED technology give the bedside lamp a much-needed upgrade. Flexible arms allow for customizable angles and task-oriented applications. Available now with one or two arms and approved for mounting in any orientation.

### **Stretch** LED Swing Arm Now available in 2 lights & titanium

 Color Temp:
 3000K


 CRI:
 90

 Dimming:
 Internal

 Rated Life:
 50,000 hours

 Input:
 120V

- A contemporary utilitarian design
- Flexible, yet fixable rubber tube for directing light
- Fingertip touch dimming on back plate
- Individually switched
- Two 12" cord covers, and 8ft cord for hardwired or portable installation
- Installs on a standard 2" x 4" junction box
- Conversion plate for 4" junction box included
- Driver located within canopy



31/2"

BL-1660

		No. of Lights	Watt	LED Lumens	Delivered Lumens	Finish
NEW	BL-1660	2	17W	660	535	WT White
	BL-1630	1	8W	489	260	BK Black TT Titanium NEW

Example: BL-1660-BK

DAMP

# Bossa Nova LED Wall Sconce


With its contrast of simple shapes, Bossa Nova captures the formal energy of Mid-Century modernism, but adds a high-tech twist with cutting-edge LED light and an installation-friendly design.

3000K
90
100%–5% ELV;
100%–3% 0–10V
50,000 hours
120V

Mouth-blown opal glass shades

• Driver located in fixture

WS-93801-BK shown



WS-93801



	No. of Lights	Watt	LED Lumens	Delivered Lumens	Finish
WS-93801	1	6W	400	300	
WS-93803	3	12W	869	681	BK Black

Example: WS-93803-BK

## Bossa Nova 38" and 54" LED Chandeliers

DAMP TITLE 24 CALIFORNIA

 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100%-10% ELV; 100%-3% 0-10V


 Rated Life:
 50,000 hours

 Input:
 120-277V

- Mouth-blown opal glass shades
- Easy-to-assemble design with quick connections
- Three 12" and one 6" downrod included
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within fixture







PD-93854

	Size	Watt	LED Lumens	Delivered Lumens	Finis	h	
PD-93838	38"	65W	5389	4670	DI/	DIl-	
PD-93854	54"	87W	7394	6158	BK	Black	


Example: PD-93854-BK




## Bossa Nova 34" and 44" LED Chandeliers

PD-93844-BK shown

With its contrast of simple shapes, Bossa Nova captures the formal energy of Mid-Century modernism, but adds a high-tech twist with cutting-edge LED light and an installation-friendly design.



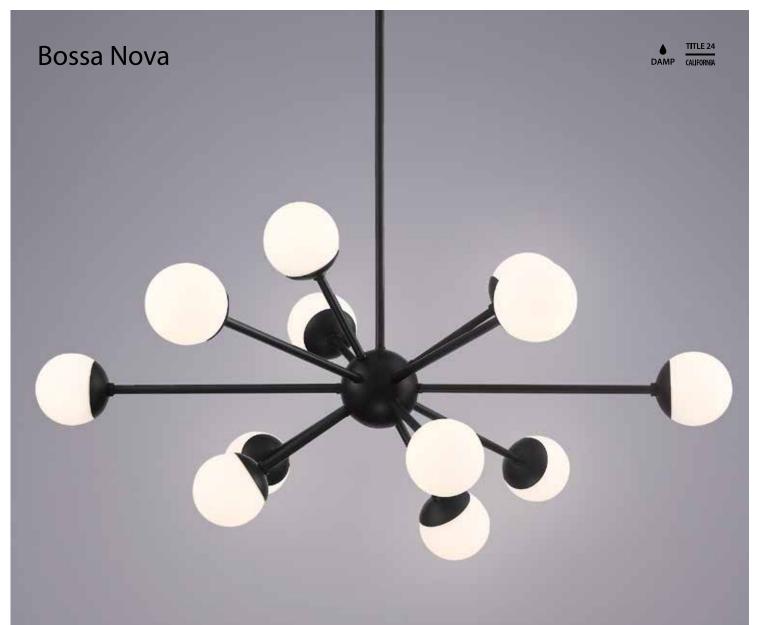

 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100%-10% ELV; 100%-3% 0-10V


 Rated Life:
 50,000 hours

 Input:
 120-277V


- Mouth-blown opal glass
- Easy-to-assemble design with quick connections
- Interchangeable rods are varied in length for customization
- Three 12" and one 6" downrod included
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within fixture

	Size	Watt	LED Lumens	Delivered Lumens	Finisł	า
PD-93834	34"	44.3W	3492	2969	ВК	Black
PD-93844	44"	43.2W	4110	3121		Black

Example: PD-93834-BK

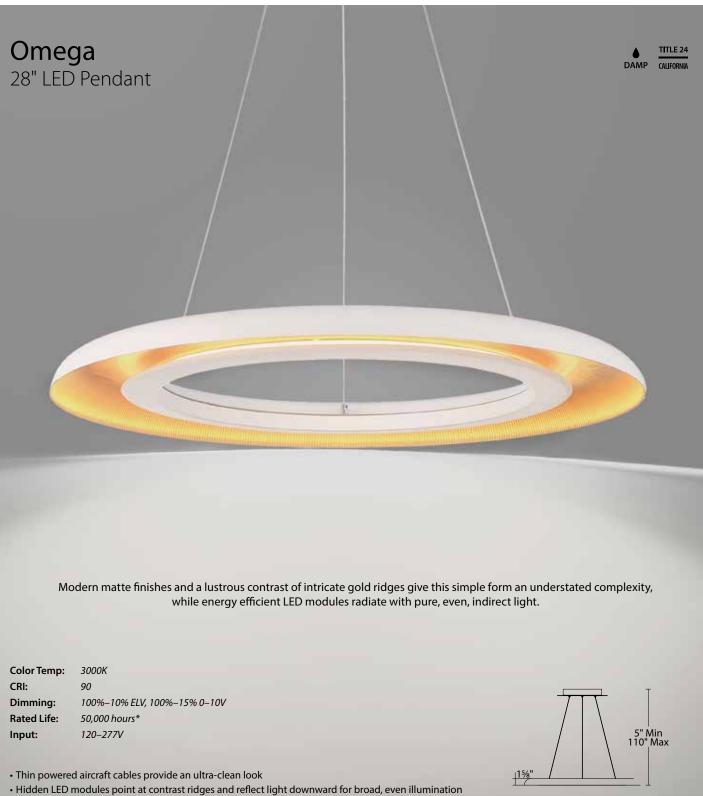


- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy



	Size	Watt	LED Lumens	Delivered Lumens	Finish		
PD-21828	28"	33W	2426	864	BK/GR WT/GR	Black/Gold Ribbed White/Gold Ribbed	

Example: PD-21828-WT/GR

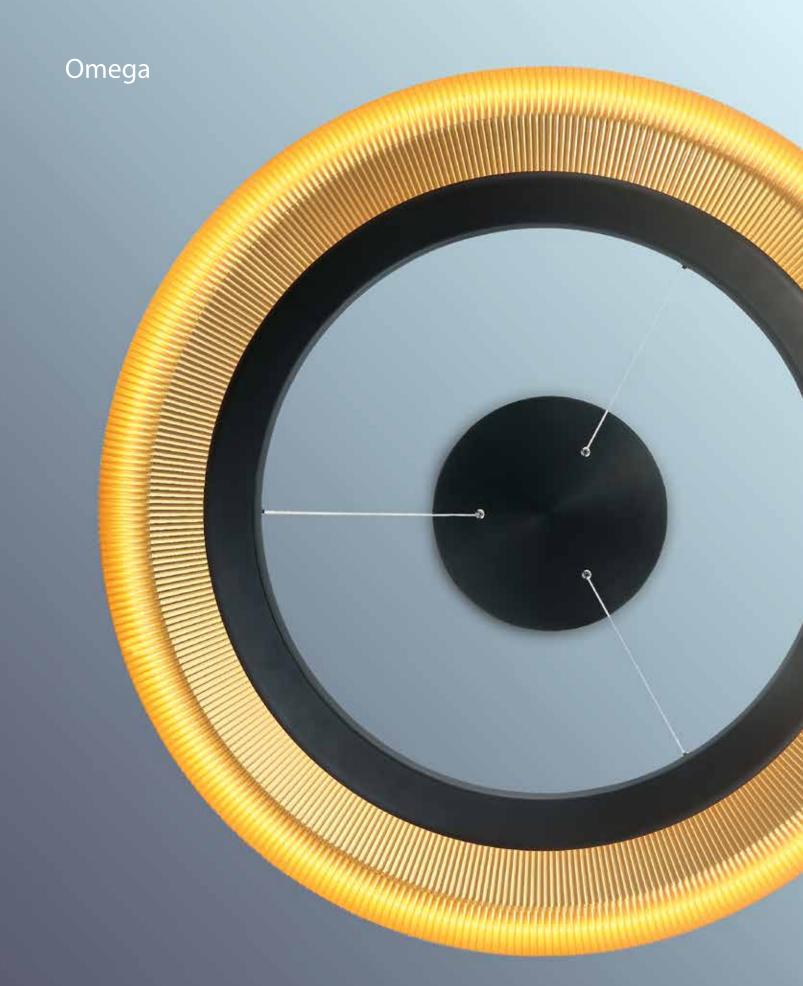


## **Corso** 18", 32" and 43" LED Pendant Now available in black and white

PD-	337	32-BK	shown


Color Temp:	3000K
CRI:	80
Dimming:	100%-5% ELV;
	0–10V
Rated Life:	83,000 hours
Input:	120–277V

Aluminum hardware, PC diffuser

- Thin powered cables provide an ultra-clean look
- LED modules concealed within for even illumination
- Can be mounted on sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy



Example: PD-33732-BK









# Corso

Cleverly hidden LED modules and a circular frosted diffuser floating inside a halo of spun aluminum work together for a beautiful, even illumination. Note the two new finishes white and black along with the original aluminum.

PD-33743-AL shown

# **Tic Toc** 6" LED Pendant



PD-37806-AL shown

An elegant design with rounded diffusers features up and down illumination for ambient and task lighting, while a beautifully finished metal shade along with an ultra-thin power wire create the sleekest profile possible.

 Color Temp:
 3000K


 CRI:
 90


 Dimming:
 100%-10% ELV

 Rated Life:
 50,000 hours

 Input:
 120V

- Aluminum hardware, PC diffusers
- Thin powered aircraft cable provides an ultra-clean look
- Up and down illumination
- Can be mounted on a sloped ceiling
- Driver concealed within canopy



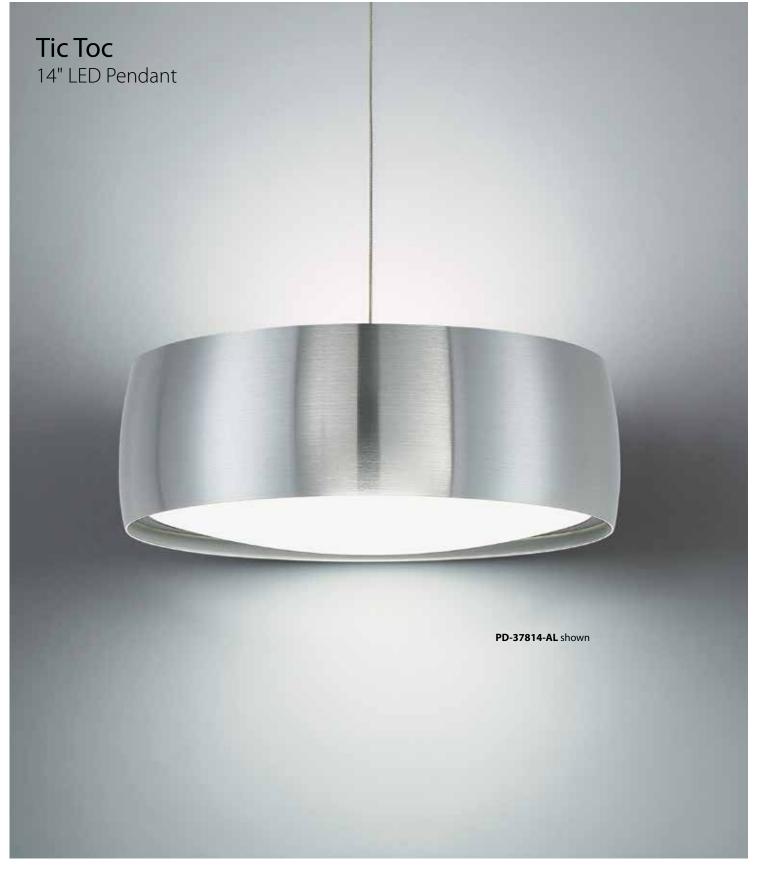

	Size	Watt	LED Lumens	Delivered Lumens	Finish	
PD-37806	6"	15W	1198	685	<b>AL</b> Brushed Aluminum	
PD-37814	14"	28W	3150	1800	AL Brushea Aluminum	

Example: PD-37806-AL

# Vida 18" and 24" LED Pendant Now available in white and black

 Color Temp:
 3000K

 CRI:
 80


 Dimming:
 100% - 5% ELV & 0-10V

 Rated Life:
 83,000 hours

 Input:
 120-277V

• Thin powered aircraft cables provide an
ultra-clean look

- LED modules positioned on tapered platform for more effective illumination
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy



	Size	Watt	LED Lumens	Delivered Lumens	Finish
PD-72718	18"	33W	2450	1755	WT White NEW
PD-72724	24"	43W	3235	2385	BK Black NEW AL Brushed Aluminum

Example: PD-72718-BK

DAMP



PD-72724-AL shown

A refreshing take on a traditional shape, the Vida pendant is crafted from high-quality spun aluminum, now finished in elegant black or white in addition to brushed aluminum. Inside, a powerful integrated LED array projects flawless light time and again.





Futuristic design meets top-tier technology in this artful pendant, where cutting-edge LED light radiates inside terraced bands finished in black, chrome or white.

Color Temp:	3000K
CRI:	90
Dimming:	100%–10% ELV
Rated Life:	50,000 hours*
Input:	120–277V

Thin powered aircraft cables match overall finish

Can be mounted on a sloped ceiling

Universal voltage driver (120V-220V-277V) within canopy

	Size	Watt	LED Lumens	Delivered Lumens	Finish
PD-95820	20"	35W	2488	1914	CH Chrome
PD-95827	27"	65W	4647	3575	BK Matte Black
PD-95838	38"	79W	5927	4559	w i matte white

Example: PD-95820-BK

# Interlace 28" and 39" LED Pendant

PD-47839-CH shown


Color Temp: CRI: Dimming: Rated Life: Input:

3000K 90 100% - 10% ELV & 0-10V 50,000 hours 120–277V


Two seamless interlocked loops


Thin powered cables provide an ultra-clean look

- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy









PD-47839



Delicate bands of light weave playfully in and out on this flowing modern design. A continuous construction, a flexible diffuser, and powered aircraft cable suspension complete an overall clean, seamless look.

	Size	Watt	LED Lumens	Delivered Lumens	Finish	
PD-47828	28"	57W	6551	4587		
PD-47839	39"	57W	4734	3241	CH Chrome	

Example: PD-47828-CH

# Radius 2-light & 3-light LED Chandeliers

 
 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100%-10% ELV; 0-10V

 Rated Life:
 50,000 hours

 Input:
 120-277V

Thin color matched powered aircraft cables and hardware

- Multiple hanging options allow for personalization
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy





9" Min 138" Max

PD-27803

	Stems	Watt	LED Lumens	Delivered Lumens	Finish
PD-27802	2	58W	2600	1872	BK Brushed Black
PD-27803	3	86W	3900	2808	AL Brushed Aluminum

Example: PD-27803-BK


# Radius

Long graceful stems of aluminum and light create a beautiful display that is both functional and modern art. With versatile hanging options, Radius lets you put a personal touch on any room. Choose two or three stems in brushed aluminum or brushed black.

# Stack 3-light, 6-light & 9-light LED Chandeliers

A chandelier that is designed to your tastes—simply adjust the hanging height and slope of any stem exactly how you want to express your artistry. Thin powered suspension wires ensure a clean look no matter how you hang it.

- Aluminum hardware and extruded acrylic diffuser
- Thin color matched powered aircraft cables and hardware
- · Height and slope of each strip can be individually adjusted for personalization
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy



	Stems	Watt	LED Lumens	Delivered Lumens	Finish
PD-29803	3	42W	2570	1850	
PD-29806	6	84W	5140	3701	AL Brushed Aluminum BK Brushed Black
PD-29809	9	126W	7700	5544	

Example: PD-29809-AL



# Frame 28" and 58" LED Pendant


An extruded acrylic diffuser with mitered edges gives this design a clean, elevated look, evenly spreading the powerful LED light for a geometric illumination that matches back to the rectilinear canopy.

Color Temp: 3000K CRI: 90 Dimming: Rated Life: Input: 120-277V

100% - 10% ELV & 0-10V 50,000 hours

5" Min 138" Max 5" Min 138" Max 28" 16"





 Aluminum hardware and extruded acrylic diffuser Crisp mitered joints • Thin color matched powered aircraft cables and hardware

- · Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy



	Size	Watt	LED Lumens	Delivered Lumens	Finish
PD-29828	28"	58W	2609	1878	BK Brushed Black
PD-29858	58"	58W	2857	2057	AL Brushed Aluminum

Example: PD-29828-BK

Edge-lit magic.

The profile of this direct and indirect pendant is just a single line under an inch thick.


Color Temp:	2700K, 3000K
CRI:	90
Dimming:	100% - 10% ELV
Rated Life:	60,000 hours
Input:	120V (277V special order)

Super thin, edge-lit LED panels illuminate up and down

Integral swivel for sloped ceilings

 10' of wire included to extend pendant up to a total of 120" with additional downrod sold separately

- Six 12" and two 6" downrods included
- Transformer located in standard 4" junction box



	Color Temp	Watt	LED Lumens	Delivered Lumens	Finish	
PD-51148-27	2700K	48W	4017	2770	AL Brushed Aluminum	
PD-51148-30	3000K	48W	4435	3055	AL Brushed Aluminum BK Brushed Black \	

### Example: PD-51148-27-BK

For 277V, add an "F" before the color temperature: PD-51148F-27-BK

DAM



Clever design details like weighted fasteners that keep the pendant level and coated suspension wires that deliver power take this luminaire to the next level, while the elegant center loop projects in 360-degrees for ambient and task light.

 Color Temp:
 3000K


 CRI:
 90

 Dimming:
 100%–5% ELV

 Rated Life:
 50,000 hours\*

 Input:
 120–277V

- Flexible composite diffuser
- Thin powered cables provide an ultra-clean look
- Suspension height can be adjusted easily with quick release
- Fasteners maintain tension to hold fixture level
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy



	Size	Watt	LED Lumens	Delivered Lumens	Finish
PD-23852	52"	43.9W	4261	2733	AL Brushed Aluminum BK Black

Example: PD-23852-BK



PD-87729-CH shown


Color Temp: 3000K CRI: 90 Dimming: Rated Life: 120–277V Input:


100% - 10% ELV & 0-10V 50,000 hours

Hand-crafted, seamless construction


Thin powered cables provide an ultra-clean look

- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy





PD-87741

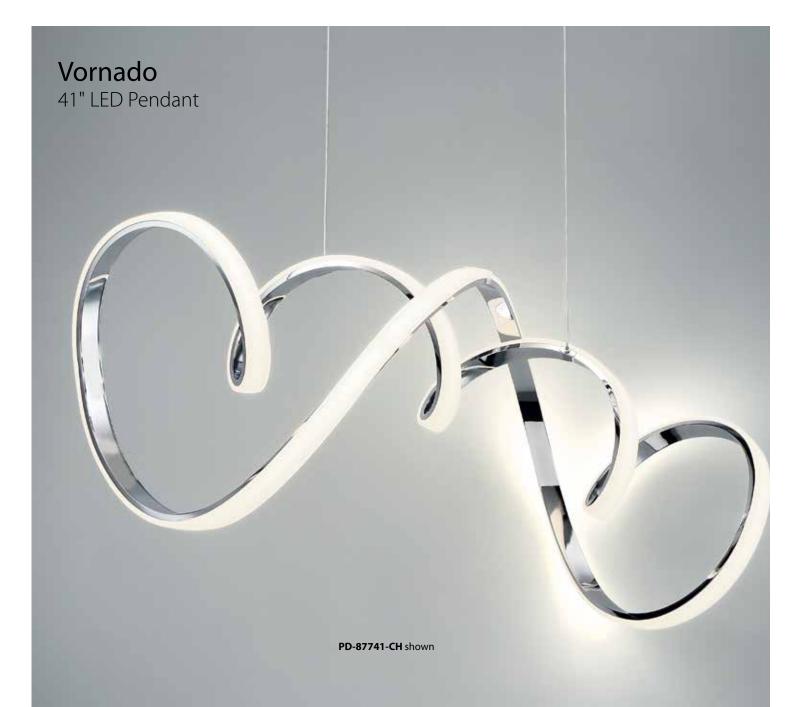

With its captivating and continuous loops, Vornado pushes the limits of engineering—bands of silver and light twist in and out like a Mobius strip on steroids. Finely wrought in spun aluminum and plated with chrome for extra shine.

	Size	Watt	LED Lumens	Delivered Lumens	Finish
PD-87729	29"	85W	7766	5375	CH Chrome
PD-87741	41"	85W	7818	5861	


Example: PD-87729-CH

# Vornado 20", 23" and 35" Linear LED Pendant


Color Temp: 3000K CRI: 80 Dimming: 100%-5% ELV, 0-10V (20") 100%-10% ELV, 0-10V (23" & 35") Rated Life: 60,000 hours Input: 120–277V

- Aluminum hardware, extruded composite diffuser
- Hand-crafted, seamless construction
- Thin powered cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- PD-87720 is Title 24 compliant
- Universal voltage driver (120V-220V-277V) concealed within canopy

PD-87720-WT shown

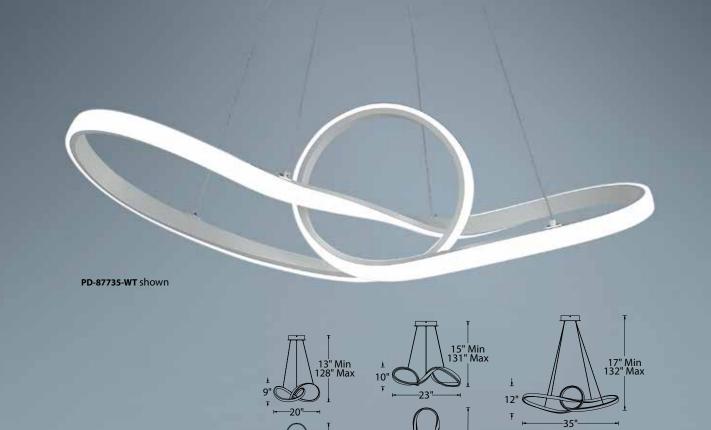

PD-87720






PD-87735

DAMP



	Size	Watt	Delivered Lumens	Finis	h	
PD-87720	20"	30.5W	2075			
PD-87723	23"	52W	3110	WТ СН	White Chrome	NEW
PD-87735	35"	52W	3550			

Example: PD-87723-CH



Vornado

# **Vornado** 31" LED Ceiling Mount

 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100% 

 Rated Life:
 50,000

 Input:
 120-22

90 100%–10% ELV & 0–10V 50,000 hours 120–277V Hand-crafted, seamless construction

Universal voltage driver (120V-220V-277V) concealed within canopy



Size	Watt	Lumens	Delivered Lumens	Finis	h	
<b>FM-87731</b> <i>31"</i>	85W	7059	5375	СН	Chrome	

Example: FM-87731-CH

## Geos 6" and 10" LED Ceiling and Wall Now available in brushed brass



Updated in a stylish brass finish to complement the latest interior trends, this super-slim design floats less than an inch from the wall or ceiling and provides ample light without any shadows or hot spots. Available in brushed brass, titanium and powder white.


Color Temp: 2700K, 3000K CRI: 90 Dimming: 100%-10% ELV; 0-10V **Rated Life:** 70,000 hours Input: 120V (277V special order)

Aluminum hardware, frosted acrylic diffuser

- Edge-lit LED with light-extraction panel for even illumination
- · Easy installation with twist-lock mechanism (no visible hardware)
- 2" x 1.38" x 1.02" transformer installs within junction box
- ADA compliant

-		Size	Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
0	FM-4606-27 FM-4606-30	6"	2700K 3000K	8W 8W	551 608	270 300	BR Brushed Brass
$\bigcirc$	FM-4610-27 FM-4610-30	10"	2700K 3000K	12W 12W	964 1064	545 600	TT Titanium WT White

For 277V special order, add an "F" before the color temperature: FM-4610F-27-BR



6"

## **Geos** 15", 22" LED Ceiling and Wall Now available in brushed brass

Multiple mid-power LEDs illuminate from the perimeter of the luminaire


DAMP ADA


76"
Transmissive display screen distributes light evenly
Cast aluminum housing doubles as heat sink

Color Temp:	2700K, 3000K
CRI:	90
Dimming:	100% - 10% ELV
Rated Life:	50,000 hours*
Input:	120–277V

Aluminum hardware, frosted acrylic diffuser

- Edge-lit LED with light-extraction panel for even illumination
- Easy installation with twist-lock mechanism (no visible hardware)
- 2.76" x 1.26" x 1.18" universal voltage driver (120V-220V-277V)





installs within junction boxADA compliant

		Size	Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
$\bigcirc$	FM-4615-27 FM-4615-30	15"	2700K 3000K	29W 29W	2330 2355	1485 1660	BR Brushed Brass
$\bigcirc$	FM-4622-27 FM-4622-30	22"	2700K 3000K	44W 44W	3745 3785	2235 2375	TT Titanium WT White

## Example: FM-4622-30-BR

For 277V special order, add an "F" before the color temperature: FM-4615F-27-BR

# Dot 6", 9", 12" and 15" Interior/Exterior LED Ceiling & Wall

Dot's finely crafted diffuser amplifies the brightness on this durable waterproof outdoor flush mount while also showing off its impressive heft and depth. Rendered in highly durable marine-grade stainless steel, Dot withstands the toughest conditions but can also complement interior metal finishes just as well.

 Color Temp:
 3000K, 3500K

 CRI:
 90


 Dimming:
 100%-10% ELV

 Rated Life:
 54,000 hours


 Input:
 120V (277V special order)

Weather-resistant 316 stainless steel body


- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- No transformer or driver needed
- 277V option available for 9", 12" & 15" sizes (special order)
- ADA compliant







WET

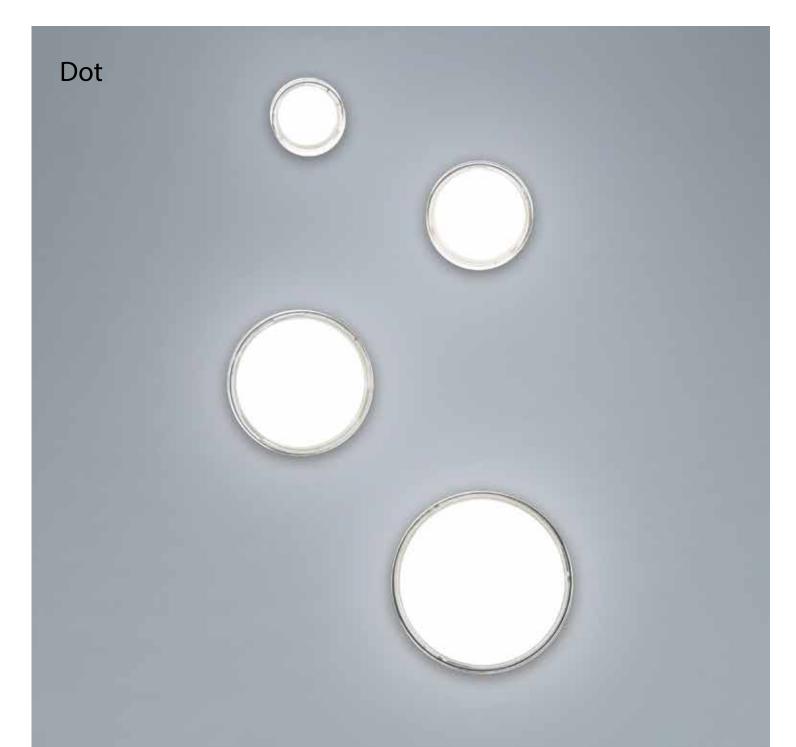

	Size	Watt	LED Lumens	Delivered Lumens	Finish	
FM-W57806-30 FM-W57806-35	6"	9W 9W	600 651	432 469		
FM-W57809-30 FM-W57809-35	9"	17W 17W	1542 1674	997 1082	SS Stair	nless
FM-W57812-30 FM-W57812-35	12"	26W 26W	2315 2513	1380 1499	Steel	
FM-W57815-30 FM-W57815-35	15"	27W 27W	2729 2963	1495 1623		

Example: FM-W57809-30-SS For 277V special order, add an "F" before the color temperature: FM-W57812F-30-SS

# Copa 9", 13" and 17" Interior/Exterior LED Pendants



The smooth graceful lines of the matte-finished shade contrast with the textured gold interior on this elegant pendant, perfect for dining rooms, kitchens, alcoves, restaurants and hospitality spaces.

Color Temp: CRI: Dimming: Rated Life: Input:	3000K 90 100% - 10% ELV, 0-10V 50,000 hours* 120V	T		T 🛱
<ul> <li>Aluminum co</li> <li>Smooth rour contrast ribb</li> <li>Three 12" an</li> <li>Can be moun included for</li> </ul>	onstruction nd exterior with weather-resistant finish, sing on interior d one 6" downrod included, additional rods available nted on a sloped ceiling, swivel attachment seismic protection aled within canopy	25" Min 120" Max 12" 12" 17" PD-W55817	24" Min 120" Max 11" 11" 13" PD-W55813	23" Min 120" Max 10" — — — — — — — — — — — — — — — — — — —

TITLE 24 California

WET



	Size	Watt	LED Lumens	Delivered Lumens	Finish		
PD-W55809	9"	15W	833	386			
PD-W55813	13"	18W	1233	633	WT/GR BK/GR	White/Gold Ribbed Black/Gold Ribbed	
PD-W55817	17"	18W	1330	619			

Example: PD-W55813-BK/GR

# Grate 12", 18" and 28" LED Interior/Exterior Wall

WET CALIFORNIA



		Size	Watt	Lumens	Lumens	Finish
1	WS-W39812	12"	8W	602	132	
	WS-W39818	18"	10W	811	190	BK Black
	WS-W39828	28"	13W	980	214	

Example: WS-W39818-BK



A heavy-gauge perforated screen softens the effect of the light on this outdoor sconce, crafted in durable aluminum and finished in weather-resistant black for an effortless look.

# **Block** 6" and 8" LED Interior/Exterior Wall




		-		
			11. The second s	
		1		
Color Temp	: 3000K			
CRI:	90			
Dimming:	100%–10% ELV			41⁄2" 31⁄2"
Rated Life:	50,000 hours			
Input:	120V–277V		41/2" 31/2"	
<ul> <li>Aluminum</li> </ul>	construction, die-cast glass accents	5	6"	8"

- Weather-resistant finish
- 6" version can be mounted in either direction
- Universal voltage driver (120V-220V-277V) concealed within fixture
- ADA compliant
- IP65 rated

4<sup>1</sup>/<sub>2</sub>", 3<sup>1</sup>/<sub>2</sub>", 3<sup>1</sup>/<sub>2</sub>",

		Size	Watt	LED Lumens	Delivered Lumens	Finish
ı,	WS-W61806	б"	9W	615	540	AL Brushed Aluminum
	WS-W61808	8"	15W	947	773	BK Black

Example: WS-W61808-AL

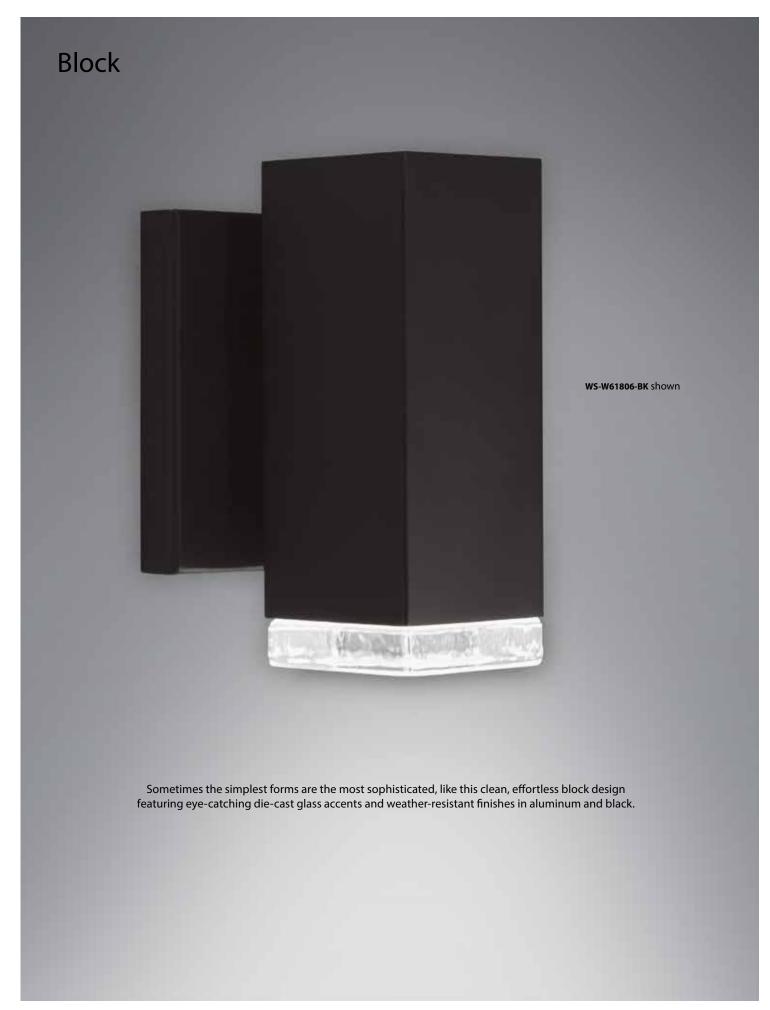

# Inset 12" and 16" LED Interior/Exterior Wall



 Color Temp:
 3000K

 CRI:
 90


 Dimming:
 100%-10% ELV

 Rated Life:
 50,000 hours\*

 Input:
 120V-277V

Customizable - contact factory for options
Aluminum construction

- UV-rated double-layer acrylic/PC diffuser,
- additional etched glass diffuser at bottom for downlight • Universal voltage driver (120V-220V-277V)
- ADA compliant




WS-W77812

WS-W77816

WET

		Size	Watt	LED Lumens	Delivered Lumens	Finish
0	WS-W77812	12"	20W	1061	743	
	WS-W77816	16"	27W	1400	980	BK Black

Example: WS-W77812-BK

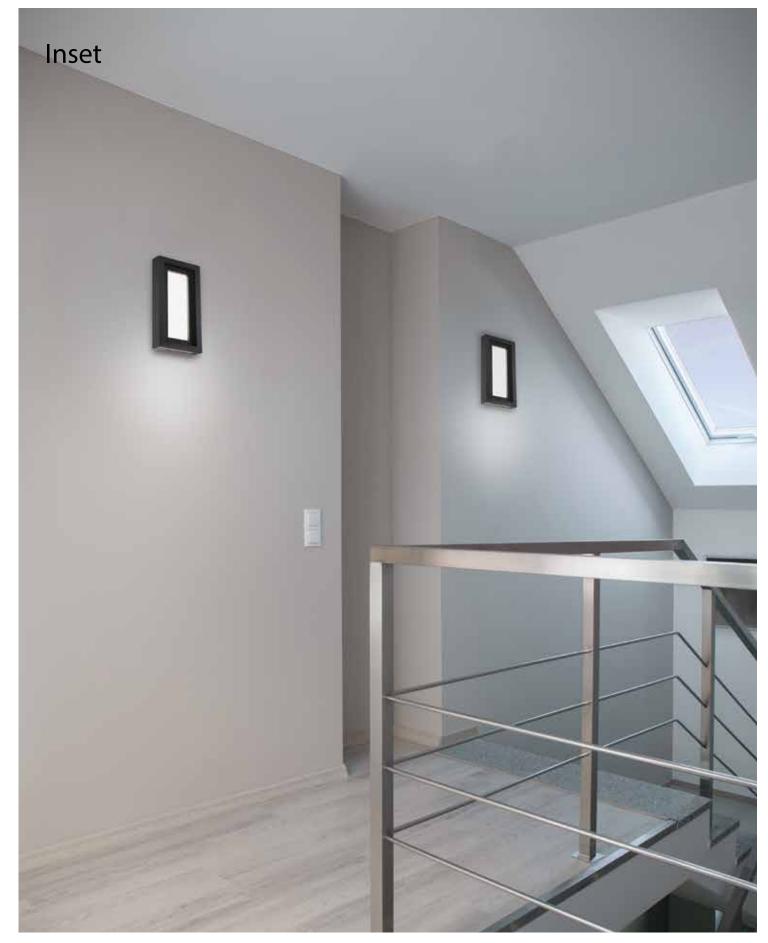

Edge-mounted LED modules stream powerful light into an innovative extraction panel, which then projects outward through the diffuser for a beautiful illumination framed in a black-finished aluminum shadow box.


# Case 9", 14" and 20" LED Outdoor






Color Temp: 3000K CRI: 90 Dimming: 100%–10% ELV Rated Life: 54,000 hours Input: 120V (277V Special Order)

- Aluminum or 316 stainless steel construction, UV-rated acrylic diffuser
- Weather-resistant finish for aluminum
- No transformer or driver needed
- ADA compliant
- IP65 rated






7

WS-W47814

WS-W47820

10"

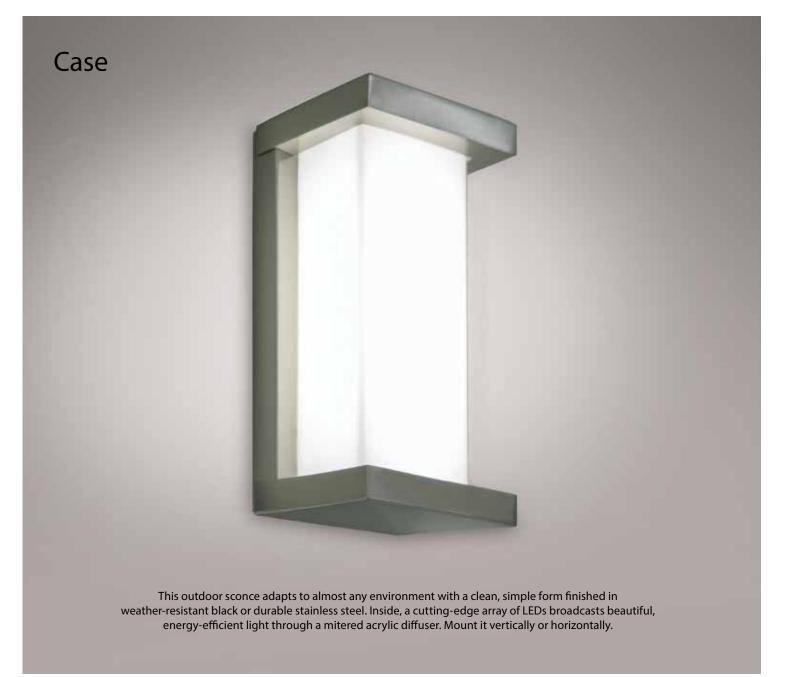

	Size	Watt	LED Lumens	Delivered Lumens	Finish
WS-W47809	9"	13W	1040	405	
WS-W47814	14"	22W	1644	843	SS Stainless Steel BK Black
WS-W47820	20"	34W	2560	1034	

Example: WS-W47809-SS

For 277V special order, add an "F" before the finish: WS-W47814F-BK

# **Cylo** 9", 16" and 24" LED Outdoor

WET CALIFORNIA



Color Temp:
CRI:
Dimming:
Rated Life:
Input:

 ap:
 3000K, 4000K

 90
 90

 100%-10% ELV
 90

 100%-10% ELV
 10000 hours


 120V (277V Special Order)
 10000 hours

Aluminum construction, natural white UV-rated acrylic diffuser


Weather-resistant finish


No transformer or driver needed


IP65 rated



WS-W91809





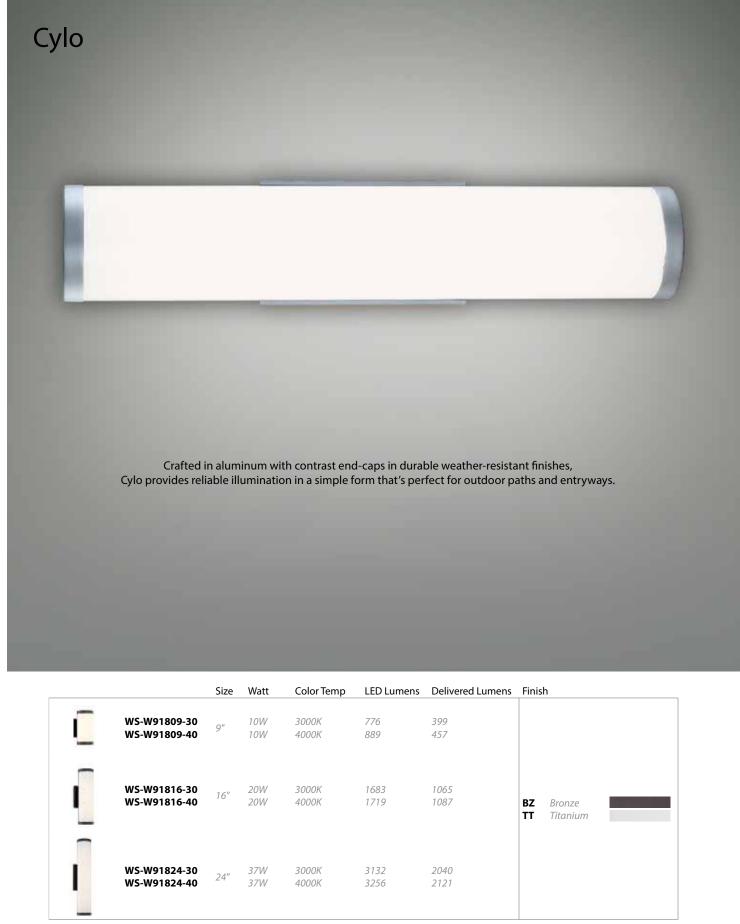

Example: WS-W91824-40-TT

For 277V special order, add an "F" before the color temperature: WS-W91824F-40-BZ

Steampunk 9" and 13" LED Interior/Exterior Wall Now available in black

Color Temp:	3000K
CRI:	90
Dimming:	100%–10% ELV
Rated Life:	80,000 hours
Input:	120V (277V special order)

Aluminum construction

- Mouth blown glass is seeded and hammered to create dramatic patterns
- Weather resistant finish
- No transformer or driver required
- IP65 rated

		Size	Watt	LED Lumens	Delivered Lumens	Finish
Ð	WS-W24509	9"	10W	624	365	BK Black NEW
Û	WS-W24513	13"	10W	657	440	BZ Bronze GH Graphite

6"

WS-W24509

9'

### Example: WS-W24513-BK

For 277V special order, add an "F" before the finish: **WS-W24513F-BK** 

3

8

WS-W24513

21/2"

13"

# Steampunk



Inside a vintage-inspired die-cast aluminum base, the glass—clear, hammered, seeded, and mouth blown for an outstanding artisanal look—projects beautiful light from a powerful LED array. Updated with a black finish, along with the original bronze and graphite.

# **Chamber** 12", 16" and 20" LED Outdoor Now available in black

Updated with a fresh black finish, this family of outdoor sconces, pendants and post lights offers a bold, Mid-Century modern look with intersecting aluminum frames and cutting-edge LED light.

Color Temp:	3000K
CRI:	90
Dimming:	100%–10% ELV
Rated Life:	50,000 hours*
Input:	120V (277V special order)


Solid aluminum construction with weather-resistant finish

- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- No transformer or driver required
- IP65 rated



WET





WS-W48620

Image: WS-W48612       12"       10W       800       195         Image: WS-W48616       16"       12W       1000       250       BK       Black Bronze       Black Bronze       Image: WS-W48620       Image: WS-W48620       Image: WS-W48620       Image: WS-W48620       1600       595	IP65 rated		Size	Watt	LED Lumens	Delivered Lumens	Finis	sh
BK     Black       BZ     Bronze		WS-W48612	12"	10W	800	195		
WS-W48620 20" 18W 1600 595		WS-W48616	16"	12W	1000	250		
		WS-W48620	20"	18W	1600	595		

Example: WS-W48616-BK

For 277V, add an "F" before the finish: WS-W48616F-BK



20" LED Outdoor Post Lantern Now available in black

♦ ● WET



Example: PD-W48616-BK

Example: PM-W48620-BZ

## В

BLISS
BLOCK
BOSSA NOVA 28, 30, 32
BRINK 16

## с

CASE72
CHAMBER78
COPA
CORSO
CYLO74

## D

## Е

ELEMENTUM .	
ENDURE	6
ESPRIT	

## F

## G

GEOS60	
GRATE	

## I

INSET70	
INTERLACE44	

## L

LEVEL
LINE
LOOPHOLE53

## Ν

NIGHTSTICK ...... 14

## ο

OMEGA	ŀ
-------	---

## R

RADIUS	

## S

STACK	48
STEAMPUNK	.76
STRETCH	.26

## т

TIC TOC	8
TRAP	2
TRIO	4

## v

VERGE	
VIDA	
VORNADO	54, 56, 58

## W

WAND	
WEDGE8	



2018 Introduction

☑ Tel: (664) 623 7143
 ☑ info@luztra.mx
 Paseo De los Héroes 2503
 Zona Río, Tijuana, B.C. CP 22010
 w w w . l u z t r a . m x