





MONTE  CARLO®

CEILING FAN COMPANY



MONTE  CARLO

CEILING FAN COMPANY



TABLE OF CONTENTS

Visual Reference Guide	2
Modern	11
Transitional	75
Traditional	117
Outdoor	137
Mini	155
Accessories	163
Resources	187
Index	198

Icons

EN* ENERGY STAR QUALIFIED

Meets strict energy efficiency guidelines set by the EPA and Department of Energy

LED LED

Has integrated LED or has an LED option

DAMP DAMP RATED

Safety listed for damp location

WET WET RATED

Safety listed for wet location

DC DC MOTOR

Has DC Motor which generates more power than regular AC motors while using 70% less energy

REV REVERSIBLE BLADES

Each side of the blade features a different finish.



TOB BY THOMAS O'BRIEN

Thomas' work often features fans within the background, so we are excited to bring forward his TOB ceiling fan collaboration with Monte Carlo. Like so much of Thomas' work, Aerotour and Metrograph feature transitional style, pairing modernism with vintage elegance and sympathetic to the most practical ideas of home.



AEROTOUR
pg. 76



AEROTOUR FLUSH MOUNT
pg. 78



METROGRAPH
pg. 80

VISUAL INDEX



ADLER
EN★ DAMP DC
pg. 58



AEROTOUR
EN★ LED DC
pg. 76



AEROTOUR FLUSH MOUNT
EN★ LED DC
pg. 78



AKOVA LED
EN★ LED DAMP DC
pg. 62



ARMSTRONG
EN★ LED DAMP DC
pg. 60



ARTIZAN
LED DAMP
pg. 132



AVVO
LED DAMP DC
pg. 34



AVVO MAX
LED DAMP DC
pg. 32



BONNEVILLE MAX
pg. 96



BOYNTON
LED WET
pg. 143



BUTTERFLY
DAMP
pg. 70



CENTRO MAX
pg. 100



CENTRO MAX II
pg. 102



CLARITY MAX
LED
pg. 36



CLARITY
LED
pg. 38



CLARITY II
LED
pg. 40



COLONY SUPER MAX
DAMP
pg. 106



COLONY SUPER MAX PLUS
DAMP
pg. 104



COLONY MAX

DAMP
pg. 110



COLONY MAX PLUS

DAMP
pg. 108



COLONY II

pg. 158



CRUISE

WET
pg. 144



CYCLONE

WET
pg. 138



DELRAY

WET DC
pg. 140



DESIGNER MAX

pg. 97



DESTIN

LED DAMP DC
pg. 66



DISCUS

pg. 90



DISCUS II

pg. 92



DISCUS CLASSIC

LED
pg. 86



DISCUS CLASSIC II

LED
pg. 88



DISCUS ORNATE

LED
pg. 134



DISCUS OUTDOOR

LED WET
pg. 146



DISCUS TRIO

LED DAMP
pg. 84



DISCUS TRIO MAX

LED DAMP
pg. 82



DYLAN

WET DC
pg. 142



EMBASSY MAX

pg. 98



EMPIRE

LED DC
pg. 64



HAVEN 52

pg. 126



HAVEN 52 LED 2

LED DC
pg. 128



HAVEN 52 LED 3

LED
pg. 130



HAVEN 52 OUTDOOR

WET
pg. 150



HAVEN 52 OUTDOOR LED

LED WET
pg. 148



HAVEN 44 OUTDOOR

WET
pg. 152



KINGSTON

EN★ LED DAMP DC
pg. 54



LILY

LED DAMP DC
pg. 69



MACH ONE
pg. 52



MACH TWO
pg. 53



MAVERICK GRAND
DAMP DC
pg. 12



MAVERICK SUPER MAX
DC DAMP
pg. 14



MAVERICK MAX
EN★ DAMP DC
pg. 18



MAVERICK MAX LED
EN★ LED DAMP DC
pg. 16



MAVERICK
EN★ DAMP DC
pg. 22



MAVERICK LED
EN★ LED DAMP DC
pg. 20



MAVERICK II
EN★ DAMP DC
pg. 26



MAVERICK II LED

EN★ LED DAMP DC

pg. 24



MELODY

LED DAMP DC

pg. 68



METROGRAPH

EN★ LED DC

pg. 80



MICRO 24

pg. 156



MINI 20

pg. 160



MINIMALIST MAX

EN★ LED DAMP DC

pg. 28



MINIMALIST

EN★ LED DAMP DC

pg. 30



ORVILLE

EN★ LED DAMP DC

pg. 56



PIPER

LED

pg. 114



PRAIRIE GRAND

EN★ LED DAMP DC

pg. 118



PRAIRIE

EN★ LED DAMP DC

pg. 120



PRAIRIE II

EN★ LED DAMP DC

pg. 122

VISUAL INDEX



SLEEK LED
LED
pg. 94



STRASBURG
pg. 133



STUDIO
pg. 72



TRAVERSE
pg. 112



TURBINE LED
LED DC
pg. 65



VISION 84
EN★ LED DC
pg. 42



VISION 72
EN★ LED DC
pg. 44



VISION MAX
LED DAMP
pg. 46



VISION
LED
pg. 48



VISION II
LED
pg. 50



YORK 60
pg. 124




YORK 52
pg. 125

USING THIS CATALOG

Here are some helpful tips and things to think about when looking for the perfect fan. This catalog is organized by style, making it easy to browse collections within an aesthetic group. The grid below breaks down the code to our product numbering system.

Unique Product Identifier

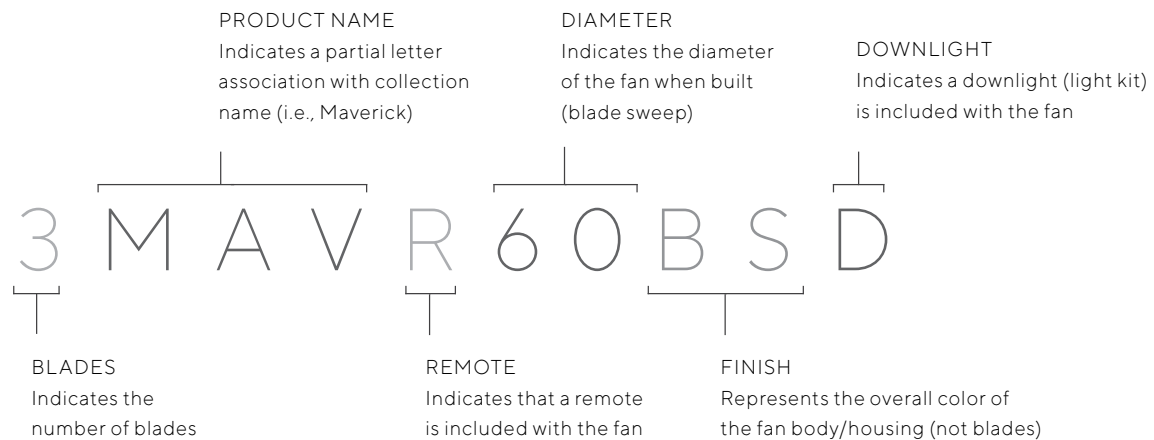

Energy Efficiency

Monte Carlo fans create overall energy cost savings through efficient engineering and design. Everything from the motor to the shape of the fan blades contributes to moving more cubic feet of air per minute (CFM) while using less energy. The result? Every Monte Carlo fan consumes less energy than a 100-watt light bulb, even at the fan's highest setting.

Monte Carlo also offers select fans that provide even more energy efficiency and savings. Look for the DC Motor icon and Energy Star icon that designate these fans throughout this catalog.

DC MOTOR

The DC (direct current) motor generates more power and torque than regular motors while using 70% less energy and running with virtually no noise. DC technology also keeps the motor cool to extend the fan's life span while the motor's small size creates greater design flexibility.

ENERGY STAR

Fans with the Energy Star rating meet the US EPA program performance standard for quality and performance. The energy savings from these fans will create significant savings on utility bills while also protecting the climate through reduced greenhouse gas emissions.

FTC Energy Guide

ELECTRICITY

Indicates how much electrical power a fan uses.

AIRFLOW

This represents airflow measured in cubic feet per minute. The airflow quantifies the amount of air a ceiling fan delivers.

ENERGY COST (PER YEAR)

Estimated Annual energy cost based on \$0.12 per KWH and 6.4 hours use per day.

EFFICIENCY

Measures the airflow efficiency by dividing the CFM a fan produces by the watts of energy it consumes.

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	20 Watts
AIRFLOW	7680 CFM	5365 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	228 CFM/Watt	269 CFM/Watt

60" ORVILLE
Brushed Steel Housing
Light Grey Weathered Oak ABS Blades
Opal Etched Glass



MODERN

Adler	58	Maverick II LED	24
Akova LED	62	Maverick Grand	12
Armstrong	60	Maverick LED	20
Avvo	34	Maverick Max	18
Avvo Max	32	Maverick Max LED	16
Butterfly	70	Maverick Super Max	14
Clarity	38	Melody	68
Clarity II	40	Minimalist	30
Clarity Max	36	Minimalist Max	28
Destin	66	Orville	56
Empire	64	Studio	72
Kingston	54	Turbine LED	65
Lily	69	Vision	48
Mach One	52	Vision II	50
Mach Two	53	Vision 72	44
Maverick	22	Vision 84	42
Maverick II	26	Vision Max	46

MAVERICK GRAND

99"



3MAVR99BKBK
Matte Black Housing
Matte Black Hand-Carved Balsa Wood Blades



3MAVR99BK
Matte Black Housing
Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR99BS
 Brushed Steel Housing
 Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR99AGP
 Aged Pewter Housing
 Light Grey Weathered Oak Hand-Carved Balsa Wood Blades



3MAVR99BSKOA
 Brushed Steel Housing
 Koa Hand-Carved Balsa Wood Blades

MAVERICK GRAND

DC DAMP

BLADES

(3) Blades (Included)
 Variable Blade Pitch
 99" Blade Sweep

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse

FAN SPECIFICATIONS



A. Fixture Drop: 13.9"
 B. Blade Drop: 13.7"
 C. Housing Width: 8.5"
 D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 120mm x 35mm

ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	N/A
AIRFLOW	17395 CFM	N/A
ENERGY COSTS	N/A	N/A
EFFICIENCY	606 CFM/Watt	N/A

MAVERICK SUPER MAX

88"



3MAVR88BK
Matte Black Housing
Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR88BKBK
Matte Black Housing
Matte Black Hand-Carved Balsa Wood Blades



3MAVR88BS
 Brushed Steel Housing
 Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR88AGP
 Aged Pewter Housing
 Light Grey Weathered Oak Hand-Carved Balsa Wood Blades



3MAVR88BSKOA
 Brushed Steel Housing
 Koa Hand-Carved Balsa Wood Blades



3MAVR88RZW
 Matte White Housing
 Matte White Hand-Carved Balsa Wood Blades

MAVERICK SUPER MAX

DC DAMP

BLADES

(3) Blades (Included)
 Variable Blade Pitch
 88" Blade Sweep

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse

FAN SPECIFICATIONS



- A. Fixture Drop: 13.9"
- B. Blade Drop: 13.7"
- C. Housing Width: 8.5"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 120mm x 25mm

ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	26 Watts	N/A
AIRFLOW	14784 CFM	N/A
ENERGY COSTS	N/A	N/A
EFFICIENCY	575 CFM/Watt	N/A

MAVERICK MAX LED

70"



3MAVR70BKDK
Matte Black Housing
Matte Black Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR70BKD
Matte Black Housing
Dark Walnut Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR70AGPD
Aged Pewter Housing
Light Grey Weathered Oak Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR70BSD
Brushed Steel Housing
Dark Walnut Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR70BSKOAD
Brushed Steel Housing
Koa Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR70RZWD
Matte White Housing
Matte White Hand-Carved Balsa Wood Blades
Opal Etched Glass

MAVERICK MAX LED

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
70" Blade Sweep

LAMPING

Integrated Downlight: 18W
Light Output: 1100 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



A. Fixture Drop: 13.8"
B. Blade Drop: 12.8"
C. Housing Width: 6.8"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	22 Watts	18 Watts
AIRFLOW	7336 CFM	5943 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	331 CFM/Watt	337 CFM/Watt

MAVERICK MAX

70"



3MAVR70BS

Brushed Steel Housing

Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR70BKBK

Matte Black Housing

Matte Black Hand-Carved Balsa Wood Blades



3MAVR70BK
Matte Black Housing
Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR70AGP
Aged Pewter Housing
Light Grey Weathered Oak Hand-Carved Balsa Wood Blades



3MAVR70BSKOA
Brushed Steel Housing
Koa Hand-Carved Balsa Wood Blades



3MAVR70RZW
Matte White Housing
Matte White Hand-Carved Balsa Wood Blades

MAVERICK MAX

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
70" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse

FAN SPECIFICATIONS



A. Fixture Drop: 11.7"
B. Blade Drop: 11.6"
C. Housing Width: 7"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	21 Watts
AIRFLOW	6821CFM	5192CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	229 CFM/Watt	250 CFM/Watt



Customize your look with
Maverick Finish Kits (pg. 184)

MAVERICK LED

60"



3MAVR60BKD
Matte Black Housing
Dark Walnut Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR60BKBKD
Matte Black Housing
Matte Black Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR6OAGPD
Aged Pewter Housing
Light Grey Weathered Oak Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR6OBSD
Brushed Steel Housing
Dark Walnut Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR6OBSKOAD
Brushed Steel Housing
Koa Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR6ORZWD
Matte White Housing
Matte White Hand-Carved Balsa Wood Blades
Opal Etched Glass

MAVERICK LED

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
60" Blade Sweep

LAMPING

Integrated Downlight: 18W
Light Output: 1100 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 13.8"
- B. Blade Drop: 12.8"
- C. Housing Width: 6.8"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	20 Watts
AIRFLOW	7680 CFM	5365 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	228 CFM/Watt	269 CFM/Watt

MAVERICK

60"



3MAVR60BSKOA
Brushed Steel Housing
Koa Hand-Carved Balsa Wood Blades



3MAVR60BKBK
Matte Black Housing
Matte Black Hand-Carved Balsa Wood Blades



3MAVR60BK
Matte Black Housing
Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR60AGP
Aged Pewter Housing
Light Grey Weathered Oak Hand-Carved Balsa Wood Blades



3MAVR60BS
Brushed Steel Housing
Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR60RZW
Matte White Housing
Matte White Hand-Carved Balsa Wood Blades

MAVERICK

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
60" Blade Sweep

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse

FAN SPECIFICATIONS



A. Fixture Drop: 11.7"
B. Blade Drop: 11.6"
C. Housing Width: 7"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	20 Watts
AIRFLOW	6687 CFM	4551 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	245 CFM/Watt	231 CFM/Watt



Customize your look with
Maverick Finish Kits (pg. 184)

MAVERICK II LED

52"



3MAVR52AGPD
Aged Pewter Housing
Light Grey Weathered Oak Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR52BKBKD
Matte Black Housing
Matte Black Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MAVR52BKD
 Matte Black Housing
 Dark Walnut Hand-Carved Balsa Wood Blades
 Opal Etched Glass



3MAVR52BSD
 Brushed Steel Housing
 Dark Walnut Hand-Carved Balsa Wood Blades
 Opal Etched Glass



3MAVR52BSKOAD
 Brushed Steel Housing
 Koa Hand-Carved Balsa Wood Blades
 Opal Etched Glass



3MAVR52RZWD
 Matte White Housing
 Matte White Hand-Carved Balsa Wood Blades
 Opal Etched Glass

MAVERICK II LED

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
 Variable Blade Pitch
 52" Blade Sweep

LAMPING

Integrated Downlight: 18W
 Light Output: 1100 Lumens Net
 CCT: 3000K
 CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
 Reverse and Dimmer

FAN SPECIFICATIONS



A. Fixture Drop: 13.8"
 B. Blade Drop: 12.8"
 C. Housing Width: 6.8"
 D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	21 Watts
AIRFLOW	6928 CFM	4707 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	230 CFM/Watt	229 CFM/Watt

MAVERICK II

52"



3MAVR52RZW
Matte White Housing
Matte White Hand-Carved Balsa Wood Blades



3MAVR52BKBK
Matte Black Housing
Matte Black Hand-Carved Balsa Wood Blades



3MAVR52BK
Matte Black Housing
Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR52BS
Brushed Steel Housing
Dark Walnut Hand-Carved Balsa Wood Blades



3MAVR52AGP
Aged Pewter Housing
Light Grey Weathered Oak Hand-Carved Balsa Wood Blades



3MAVR52BSKOA
Brushed Steel Housing
Koa Hand-Carved Balsa Wood Blades

MAVERICK II

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
52" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse

FAN SPECIFICATIONS



- A. Fixture Drop: 11.7"
- B. Blade Drop: 11.6"
- C. Housing Width: 7"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	18 Watts
AIRFLOW	5589 CFM	3807 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	217 CFM/Watt	208 CFM/Watt



Customize your look with
Maverick Finish Kits (pg. 184)

MINIMALIST MAX

72"



3MNLR72AGPD-V1

Aged Pewter Housing

Light Grey Weathered Oak Hand-Carved Balsa Wood Blades

Opal Etched Glass

MINIMALIST MAX

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
72" Blade Sweep

LAMPING

Integrated Downlight: 16W
Light Output: 1100 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 13.7"
- B. Blade Drop: 12.9"
- C. Housing Width: 5.4"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	31 Watts	22 Watts
AIRFLOW	9468 CFM	6934 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	302 CFM/Watt	322 CFM/Watt



3MNL72BKD-V1
Matte Black Housing
Dark Walnut Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MNL72BSD-V1
Brushed Steel Housing
Dark Walnut Hand-Carved Balsa Wood Blades
Opal Etched Glass

MINIMALIST

56"



3MNLR56BKD-V1

Matte Black Housing

Dark Walnut Hand-Carved Balsa Wood Blades

Opal Etched Glass

MINIMALIST

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
56" Blade Sweep

LAMPING

Integrated Downlight: 16W
Light Output: 1100 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



A. Fixture Drop: 13.7"
B. Blade Drop: 12.9"
C. Housing Width: 5.4"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	21 Watts
AIRFLOW	7240 CFM	5089 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	267 CFM/Watt	246 CFM/Watt



3MNL56BSD-V1
Brushed Steel Housing
Dark Walnut Hand-Carved Balsa Wood Blades
Opal Etched Glass



3MNL56AGPD-V1
Aged Pewter Housing
Light Grey Weathered Oak Hand-Carved Balsa Wood Blades
Opal Etched Glass

AVVO MAX

64"



3AVMR64KOAD
Koa Wood Housing
Koa Wood ABS Blades
Frosted Lexan Diffuser



Shown with Finishing Cap
(Included) for Use Without Light



3AVMR64GRYD
 Grey Housing
 Grey ABS Blades
 Frosted Lexan Diffuser



3AVMR64AGPD
 Aged Pewter Housing
 Light Grey Weathered Oak ABS Blades
 Frosted Lexan Diffuser



3AVMR64QSD
 Quicksilver Housing
 Quicksilver ABS Blades
 Frosted Lexan Diffuser



3AVMR64RZWD
 Matte White Housing
 Matte White ABS Blades
 Frosted Lexan Diffuser

AVVO MAX

LED DAMP DC

BLADES

(3) Blades (Included)
 Variable Blade Pitch
 64" Blade Sweep

LAMPING

Integrated Downlight: 15W
 Light Output: 950 Lumens Net
 CCT: 2700K
 CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
 Reverse and Dimmer
 Finishing Cap Included

FAN SPECIFICATIONS



- A. Fixture Drop: 12.9"
- B. Blade Drop: 10.8"
- C. Housing Width: 9.7"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	31 Watts	19 Watts
AIRFLOW	7979 CFM	5642 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	257 CFM/Watt	290 CFM/Watt

AVVO

56"



3AVOR56GRYD-V1

Grey Housing
Grey ABS Blades
Frosted Lexan Diffuser



Shown with Finishing Cap
(Included) for Use Without Light



3AVOR56KOAD-V1
 Koa Wood Housing
 Koa Wood ABS Blades
 Frosted Lexan Diffuser



3AVOR56AGPD
 Aged Pewter Housing
 Light Grey Weathered Oak ABS Blades
 Frosted Lexan Diffuser



3AVOR56QSD-V1
 Quicksilver Housing
 Quicksilver ABS Blades
 Frosted Lexan Diffuser



3AVOR56RZWD-V1
 Matte White Housing
 Matte White ABS Blades
 Frosted Lexan Diffuser

AVVO

LED DAMP DC

BLADES

(3) Blades (Included)
 Variable Blade Pitch
 56" Blade Sweep

LAMPING

Integrated Downlight: 15W
 Light Output: 950 Lumens Net
 CCT: 2700K
 CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
 Reverse and Dimmer
 Finishing Cap Included

FAN SPECIFICATIONS



A. Fixture Drop: 12.9"
 B. Blade Drop: 10.8"
 C. Housing Width: 9.7"
 D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	24 Watts	12 Watts
AIRFLOW	6461 CFM	3885 CFM
ENERGY COSTS	N/A	\$3 Per Year
EFFICIENCY	270 CFM/Watt	325 CFM/Watt

CLARITY MAX

56"



3CLMR56RBD-V1
Roman Bronze Housing
Roman Bronze Blades
Frosted Acrylic Diffuser

CLARITY MAX

LED

BLADES

(3) Blades (Included)
 12° Blade Pitch
 56" Blade Sweep


LAMPING

Integrated Downlight: 20W
 Light Output: 950 Lumens Net
 CCT: 2700K
 CRI: 90+

INCLUDED CONTROLS/ACCESSORIES

Wall Mount Control, 4-speed,
 Dimmer and Manual Reverse
 Finishing Cap Included

FAN SPECIFICATIONS



- A. Fixture Drop: 9.7"
- B. Blade Drop: 7.6"
- C. Housing Width: 9.7"
- D. Downrod: N/A

Motor Size: 172mm x 17mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	38 Watts
AIRFLOW	4381 CFM	2753 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	68 CFM/Watt	73 CFM/Watt



REV

3CLMR56BSD-V1

Brushed Steel Housing
 Silver/American Walnut Reversible Blades
 Frosted Acrylic Diffuser



3CLMR56RZWD-V1

Matte White Housing
 Matte White Blades
 Frosted Acrylic Diffuser

CLARITY

52"



3CLYR52OZD-V1

Oil Rubbed Bronze Housing
Oil Rubbed Bronze ABS Blades
Frosted Acrylic Diffuser

CLARITY

LED

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep


LAMPING

Integrated Downlight: 20W
Light Output: 900 Lumens Net
CCT: 2700K
CRI: 90+

INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,
Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 9.2"
- B. Blade Drop: 6.5"
- C. Housing Width: 8.8"
- D. Downrod: N/A

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	63 Watts	36 Watts
AIRFLOW	3682 CFM	2804 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	59 CFM/Watt	77 CFM/Watt



3CLYR52BSD-V1
Brushed Steel Housing
Teak ABS Blades
Frosted Acrylic Diffuser



3CLYR52RZWD-V1
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Diffuser

CLARITY II

42"



3CLYR42BSD-V1
Brushed Steel Housing
Teak ABS Blades
Frosted Acrylic Diffuser

CLARITY II

LED

BLADES

(3) Blades (Included)
12° Blade Pitch
42" Blade Sweep


LAMPING

Integrated Downlight: 20W
Light Output: 900 Lumens Net
CCT: 2700K
CRI: 90+

INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,
Reverse and Dimmer

FAN SPECIFICATIONS



A. Fixture Drop: 9.2"
B. Blade Drop: 6.5"
C. Housing Width: 8.5"
D. Downrod: N/A

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	39 Watts	30 Watts
AIRFLOW	2401 CFM	1870 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	62 CFM/Watt	63 CFM/Watt



3CLYR42OZD-V1
Oil Rubbed Bronze Housing
Oil Rubbed Bronze ABS Blades
Frosted Acrylic Diffuser



3CLYR42RZWD-V1
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Diffuser

VISION 84

84"



5VMR84RZWD
Matte White Housing
Matte White Hand-Carved Wood Blades
Frosted Acrylic Diffuser



Shown with Finishing Cap
(Included) for Use Without Light

VISION 84

EN★ LED DC

BLADES

(5) Blades (Included)
 12° Blade Pitch
 84" Blade Sweep

LAMPING

Integrated Downlight: 20W
 Light Output: 1390 Lumens Net
 CCT: 3000K
 CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
 Reverse and Dimmer
 Finishing Cap Included

FAN SPECIFICATIONS



A. Fixture Drop: 16.7"
 B. Blade Drop: 13.5"
 C. Housing Width: 9.3"
 D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 178mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	21 Watts
AIRFLOW	11277 CFM	8997 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	373 CFM/Watt	431 CFM/Watt



REV

5VMR84OZD

Oil Rubbed Bronze Housing
 Oil Rubbed Bronze/Walnut Reversible Hand-Carved Wood Blades
 Frosted Acrylic Diffuser



REV

5VMR84BSD

Brushed Steel Housing
 Silver/Light Grey Weathered Oak Reversible Hand-Carved Wood Blades
 Frosted Acrylic Diffuser

VISION 72

72"



REV

5VMR72OZD

Oil Rubbed Bronze Housing
Oil Rubbed Bronze/Walnut Reversible Hand-Carved Wood Blades
Frosted Acrylic Diffuser



Shown with Finishing Cap
(Included) for Use Without Light

VISION 72

EN★ LED DC

BLADES

(5) Blades (Included)
12° Blade Pitch
72" Blade Sweep

LAMPING

Integrated Downlight: 20W
Light Output: 1390 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer
Finishing Cap Included

FAN SPECIFICATIONS



- A. Fixture Drop: 16.7"
- B. Blade Drop: 13.5"
- C. Housing Width: 9.3"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 178mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	21 Watts
AIRFLOW	10197 CFM	7512 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	308 CFM/Watt	353 CFM/Watt



REV

5VMR72BSD

Brushed Steel Housing
Silver/Light Grey Weathered Oak Reversible Hand-Carved Wood Blades
Frosted Acrylic Diffuser



5VMR72RZWD

Matte White Housing
Matte White Hand-Carved Wood Blades
Frosted Acrylic Diffuser

VISION MAX

56"



3VNMR56RBD-V1
Roman Bronze Housing
Roman Bronze Blades
Frosted Acrylic Diffuser

VISION MAX

LED DAMP

BLADES

(3) Blades (Included)
 12° Blade Pitch
 56" Blade Sweep

LAMPING

Integrated Downlight: 20W
 Light Output: 950 Lumens Net
 CCT: 2700K
 CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Wall Mount Control, 4-speed,
 Dimmer and Manual Reverse
 Finishing Cap Included

FAN SPECIFICATIONS



- A. Fixture Drop: 14"
- B. Blade Drop: 10.7"
- C. Housing Width: 9.3"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 172mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	37 Watts
AIRFLOW	5204 CFM	3334 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	82 CFM/Watt	89 CFM/Watt



REV

3VNMR56BSD-V1

Brushed Steel Housing
 Silver/American Walnut Reversible Blades
 Frosted Acrylic Diffuser



3VNMR56RZWD-V1

Matte White Housing
 Matte White Blades
 Frosted Acrylic Diffuser

VISION
52"



3VNR52RZWD-V1
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Diffuser



3VNR52OZD-V1
 Oil Rubbed Bronze Housing
 Oil Rubbed Bronze ABS Blades
 Frosted Acrylic Diffuser



3VNR52BSD-V1
 Brushed Steel Housing
 Teak ABS Blades
 Frosted Acrylic Diffuser

VISION

LED

BLADES

(3) Blades (Included)
 12° Blade Pitch
 52" Blade Sweep

LAMPING

Integrated Downlight: 20W
 Light Output: 900 Lumens Net
 CCT: 2700K
 CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,
 Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 14.6"
- B. Blade Drop: 10.6"
- C. Housing Width: 7.9"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	44 Watts	32 Watts
AIRFLOW	3406 CFM	2685 CFM
ENERGY COSTS	N/A	\$9 Per Year
EFFICIENCY	78 CFM/Watt	83 CFM/Watt

VISION II

42"



3VNR42OZD-V1
Oil Rubbed Bronze Housing
Oil Rubbed Bronze ABS Blades
Frosted Acrylic Diffuser



3VNR42BSD-V1
 Brushed Steel Housing
 Teak ABS Blades
 Frosted Acrylic Diffuser



3VNR42RZWD-V1
 Matte White Housing
 Matte White ABS Blades
 Frosted Acrylic Diffuser

VISION II

LED

BLADES

(3) Blades (Included)
 12° Blade Pitch
 42" Blade Sweep

LAMPING

Integrated Downlight: 20W
 Light Output: 900 Lumens Net
 CCT: 2700K
 CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,
 Reverse and Dimmer

FAN SPECIFICATIONS



A. Fixture Drop: 14.5"
 B. Blade Drop: 12.1"
 C. Housing Width: 8.2"
 D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	41 Watts	29 Watts
AIRFLOW	2185 CFM	1678 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	53 CFM/Watt	57 CFM/Watt

MACH ONE

52"

BLADES

(3) Blades (Included)

13° Blade Pitch

52" Blade Sweep

LAMPING

Downlight: (1) 75W Halogen Bulb (Included)

MOUNTING


See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,

Dimmer and Manual Reverse

FAN SPECIFICATIONS



A. Fixture Drop: 14.5"

B. Blade Drop: 11.5"

C. Housing Width: 8.6"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 172mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	56 Watts	37 Watts
AIRFLOW	4306 CFM	3057 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	81 CFM/Watt	82 CFM/Watt



3MO52TMO-L

Titanium Housing

Titanium ABS Blades

Matte Opal Glass



3MO52WHO-L

White Housing

White ABS Blades

Matte Opal Glass

MACH TWO

38^{''}



3MTR38TMO-L
Titanium Housing
Titanium ABS Blades
Matte Opal Glass



3MTR38WHO-L
White Housing
White ABS Blades
Matte Opal Glass

BLADES

(3) Blades (Included)
13° Blade Pitch
38" Blade Sweep

LAMPING

Integrated Downlight: (1) 75W Halogen Bulb
(Included)


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,
Dimmer and Manual Reverse

FAN SPECIFICATIONS



- A. Fixture Drop: 14.5"
- B. Blade Drop: 11.8"
- C. Housing Width: 8.6"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 172mm x 14mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	46 Watts	34 Watts
AIRFLOW	3239 CFM	2516 CFM
ENERGY COSTS	N/A	\$9 Per Year
EFFICIENCY	75 CFM/Watt	75 CFM/Watt

KINGSTON

72"

EN★ LED DAMP DC

BLADES

(8) Blades (Included)
Variable Blade Pitch
72" Blade Sweep

LAMPING

Integrated Downlight: 18W
Light Output: 890 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 17.3"
- B. Blade Drop: 14.8"
- C. Housing Width: 8.3"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 120mm x 30mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	20 Watts
AIRFLOW	10213 CFM	7713 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	367 CFM/Watt	385 CFM/Watt



8KGR72BKD
Matte Black Housing
Dark Walnut ABS Blades
Matte Opal Glass



8KGR72BSLGWOD
Brushed Steel Housing
Light Grey Weathered Oak ABS Blades
Matte Opal Glass



8KGR72RZWD
Matte White Housing
Matte White ABS Blades
Matte Opal Glass



72" Kingston
Matte Black Housing
Dark Walnut ABS Blades
Matte Opal Glass

ORVILLE

60"



3OVR60BKBKD
Matte Black Housing
Matte Black ABS Blades
Opal Etched Glass



3OVR60BSLGWOD
Brushed Steel Housing
Light Grey Weathered Oak ABS Blades
Opal Etched Glass

ORVILLE

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
60" Blade Sweep

LAMPING

Integrated Downlight: 18W
Light Output: 925 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 14.1"
- B. Blade Drop: 11.8"
- C. Housing Width: 9.0"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	24 Watts	18 Watts
AIRFLOW	7543 CFM	5739 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	309 CFM/Watt	317 CFM/Watt



30VR60BSD
Brushed Steel Housing
Silver ABS Blades
Opal Etched Glass



30VR60RZWD
Matte White Housing
Matte White ABS Blades
Opal Etched Glass

ADLER

60"



3ADR60BKBK
Matte Black Housing
Matte Black ABS Blades



3ADR60AGP
Aged Pewter Housing
Light Grey Weathered Oak ABS Blades

ADLER

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
60" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse

FAN SPECIFICATIONS



A. Fixture Drop: 12.5"

B. Blade Drop: 13.3"

C. Housing Width: 6"

D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	20 Watts
AIRFLOW	5818 CFM	3996 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	200 CFM/Watt	200 CFM/Watt



3ADR60BS
Brushed Steel Housing
Silver ABS Blades



3ADR60RZW
Matte White Housing
Matte White ABS Blades

ARMSTRONG

60"



3AMR60AGPD

Aged Pewter Housing
Light Grey Weathered Oak ABS Blades
Frosted Lexan Diffuser



Shown with Finishing Cap
(Included) for Use Without Light

ARMSTRONG

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
16° Blade Pitch
60" Blade Sweep

LAMPING

Integrated Downlight: 15W
Light Output: 725 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES


Hand-held Remote, 6-speed,
Reverse, and Dimmer
Finishing Cap Included



3AMR60BSD

Brushed Steel Housing
Silver ABS Blades
Frosted Lexan Diffuser

FAN SPECIFICATIONS



A. Fixture Drop: 14.1"
B. Blade Drop: 12.6"
C. Housing Width: 5.4"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 125mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	22 Watts
AIRFLOW	7732 CFM	5356 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	233 CFM/Watt	248 CFM/Watt



3AMR60RZWD

Matte White Housing
Matte White ABS Blades
Frosted Lexan Diffuser

AKOVA LED

56"

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
17° Blade Pitch
56" Blade Sweep

LAMPING

Integrated Downlight: 20W
Light Output: 980 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer
Finishing Cap Included

FAN SPECIFICATIONS



- A. Fixture Drop: 14.4"
- B. Blade Drop: 6.4"
- C. Housing Width: 8.5"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 125mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	25 Watts
AIRFLOW	4515 CFM	3279 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	133 CFM/Watt	131 CFM/Watt



3AKR56BKD
Matte Black Housing with Aged Brass
Matte Black ABS Blades
Matte Opal Glass



3AKR56CHD
Silver Housing with Chrome
Silver ABS Blades
Matte Opal Glass



3AKR56RZWD
Matte White Housing with Chrome
Matte White ABS Blades
Matte Opal Glass



56" Akova LED
Matte White Housing
Matte White ABS Blades
Matte Opal Glass

EMPIRE

60"

LED DC

BLADES

(8) Blades (Included)
13° Blade Pitch
60" Blade Sweep

LAMPING

Integrated Downlight: 15W
Light Output: 740 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

Empire is Not Compatible with
Downrods or Canopy Kits

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer
Finishing Cap Included

FAN SPECIFICATIONS



- A. Fixture Drop: 15.34"
- B. Blade Drop: 12"
- C. Housing Width: 7.5"
- D. Downrod: N/A

Motor Size: 188mm x 14mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	38 Watts	18 Watts
AIRFLOW	7271 CFM	4856 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	192 CFM/Watt	265 CFM/Watt



8EER6OBSD-V1
Brushed Steel Housing
Silver/Walnut Reversible Blades
Frosted Lexan Diffuser



Shown with Finishing Cap
(Included) for Use Without Light

TURBINE LED

56"

LED DC



8TNR56BKD-V1
Matte Black Housing
Black ABS Blades
Matte Opal Glass



8TNR56PBSD-V1
Painted Brushed Steel Housing
Painted Brushed Steel ABS Blades
Matte Opal Glass



8TNR56RZWD-V1
Matte White Housing
Matte White ABS Blades
Matte Opal Glass

BLADES

(8) Blades (Included)
15° Blade Pitch
56" Blade Sweep

LAMPING

Integrated Downlight: 20W
Integrated Uplight: 10W
Light Output: 750 Lumens Net (Downlight) and
360 Lumens Net (Uplight)
CCT: 2700 (Downlight and Uplight)
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse and
Independent Uplight/Downlight Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 19.1"
- B. Blade Drop: 13.5"
- C. Housing Width: 9.1"
- D. Downrod: 8" (additional lengths pg. 192)

Motor Size: 165mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	22 Watts
AIRFLOW	8183 CFM	6045 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	243 CFM/Watt	274 CFM/Watt

DESTIN

57"

LED DAMP DC

BLADES

(3) Blades (Included)
16° Blade Pitch
52" Blade Sweep

LAMPING

Integrated Downlight: 20W
Light Output: 1060 Lumens Net
CCT: 2700K
CRI: 90+

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 13.7"
- B. Blade Drop: 8.6"
- C. Housing Width: 7"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 120mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	17 Watts
AIRFLOW	5624 CFM	3928 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	225 CFM/Watt	225 CFM/Watt



3DSTR57BSD
Brushed Steel Housing
Koa ABS Blades
Frosted Lexan Diffuser



3DSTR57AGPD
Aged Pewter Housing
Light Grey Weathered Oak ABS Blades
Frosted Lexan Diffuser



57" DESTIN
Aged Pewter Housing
Light Grey Weathered Oak ABS Blades
Frosted Lexan Diffuser

MELODY

56"

LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
56" Blade Sweep

LAMPING

Integrated Downlight: 18W
Light Output: 875 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS

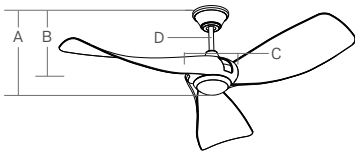

- A. Fixture Drop: 14.2"
- B. Blade Drop: 13.9"
- C. Housing Width: 6.4"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 120mm x 30mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	87 Watts	19 Watts
AIRFLOW	7212 CFM	5088 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	83 CFM/Watt	264 CFM/Watt



3MER56BSD

Brushed Steel Housing
Dark Walnut ABS Blades
Frosted Lexan Diffuser



3MER56AGPD

Aged Pewter Housing
Light Grey Weathered Oak ABS Blades
Frosted Lexan Diffuser

LILY

56"

LED DAMP DC



5LLR56BSD-V1
Brushed Steel Housing
Silver ABS Blades
Clear Frosted Glass

BLADES

(5) Blades (Included)
14° Blade Pitch
56" Blade Sweep

LAMPING

Integrated Downlight: 15W
Light Output: 715 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 16.2"
- B. Blade Drop: 13.3"
- C. Housing Width: 5.5"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 120mm x 25mm



5LLR56RZWD-V1
Matte White Housing
Matte White ABS Blades
Clear Frosted Glass

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	19 Watts
AIRFLOW	6624 CFM	4698 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	254 CFM/Watt	253 CFM/Watt

BUTTERFLY

54"

DAMP

BLADES

(4) Blades (Included)
15° Blade Pitch
54" Blade Sweep

LAMPING

Downlight: (1) 75W Halogen Bulb (Included)


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,
Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 20"
- B. Blade Drop: 20.67"
- C. Housing Width: 6.9"
- D. Downrod: 8" (additional lengths pg. 192)

Motor Size: 153mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	41 Watts
AIRFLOW	4903 CFM	3297 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	76 CFM/Watt	81 CFM/Watt



4BFR54BSD
Brushed Steel Housing
Silver ABS Blades
Opal Etched Glass



54" BUTTERFLY
Brushed Steel Housing
Silver ABS Blades
Opal Etched Glass

STUDIO

54"



3SU54BK
Matte Black Housing
Matte Black Curved Metal Blades



3SU54RB
Roman Bronze Housing
Roman Bronze Curved Metal Blades



3SU54BP
Brushed Pewter Housing
Brushed Pewter Curved Metal Blades



3SU54PN
Polished Nickel Housing
Polished Nickel Curved Metal Blades



3SU54WH
White Housing
White Curved Metal Blades

STUDIO

BLADES

(3) Blades (Included)
10° Blade Pitch
54" Blade Sweep


MOUNTING

See pg. 189
Due to safety requirements, this fan should be mounted on 11' ceilings or higher

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 14.84"
B. Blade Drop: 11.32"
C. Housing Width: 7.5"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 188mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	96 Watts	n/a Watts
AIRFLOW	8508 CFM	n/a CFM
ENERGY COSTS	N/A	\$n/a Per Year
EFFICIENCY	88 CFM/Watt	n/a CFM/Watt



52" DISCUS CLASSIC
Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass

TRANSITIONAL

Aerotour	76
Aerotour Flush Mount	78
Bonneville Max	96
Centro Max	100
Centro Max II	102
Colony Max	110
Colony Max Plus	108
Colony Super Max	106
Colony Super Max Plus	104
Designer Max	97
Discus	90
Discus II	92
Discus Classic	86
Discus Classic II	88
Discus Trio	84
Discus Trio Max	82
Embassy Max	98
Piper	114
Sleek LED	94
Spotlight	80
Traverse	112

AEROTOUR TOB BY THOMAS O'BRIEN

56"



3TAR56PNDMD
Polished Nickel Housing
Dark Mahogany Carved Wood Blades
Frosted White Glass



3TAR56BZD
Bronze Housing
Dark Mahogany Carved Wood Blades
Frosted White Glass

AEROTOUR

TOB BY THOMAS O'BRIEN

EN★ LED DC

BLADES

(3) Blades (Included)
13° Blade Pitch
56" Blade Sweep

LAMPING

Integrated Downlight: 18W
Light Output: 1600 Lumens
CCT: 3000K
CRI: 90+

MOUNTING

See pg. 189


INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer



3TAR56PNLGRYD
Polished Nickel Housing
Grey Carved Wood Blades
Frosted White Glass

FAN SPECIFICATIONS



A. Fixture Drop: 15.9"
B. Blade Drop: 11"
C. Housing Width: 9.4"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 155mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD Watts	TBD Watts
AIRFLOW	TBD CFM	TBD CFM
ENERGY COSTS	N/A	\$TBD Per Year
EFFICIENCY	TBD CFM/Watt	TBD CFM/Watt

For more information, go to
www.montecarlofans.com



3TAR56SND
Satin Nickel Housing
Silver Carved Wood Blades
Frosted White Glass

AEROTOUR FLUSH MOUNT TOB BY THOMAS O'BRIEN

56"



3TAHR56BZD
Bronze Housing
Dark Mahogany Carved Wood Blades
Frosted White Glass



3TAHR56PNDMD
Polished Nickel Housing
Dark Mahogany Carved Wood Blades
Frosted White Glass

AEROTOUR FLUSH MOUNT

TOB BY THOMAS O'BRIEN

EN★ LED DC

BLADES

(3) Blades (Included)

13° Blade Pitch

56" Blade Sweep

LAMPING

Integrated Downlight: 20W

Light Output: 1600 Lumens

CCT: 3000K

CRI: 90+

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer



3TAHR56PNLGRYD
Polished Nickel Housing
Grey Carved Wood Blades
Frosted White Glass

FAN SPECIFICATIONS



A. Fixture Drop: 12.7"

B. Blade Drop: 8.4"

C. Housing Width: 11.5"

D. Downrod: N/A

Motor Size: 178mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD Watts	TBD Watts
AIRFLOW	TBD CFM	TBD CFM
ENERGY COSTS	N/A	\$TBD Per Year
EFFICIENCY	TBD CFM/Watt	TBD CFM/Watt

For more information, go to
www.montecarlofans.com



3TAHR56SND
Satin Nickel Housing
Silver Carved Wood Blades
Frosted White Glass

METROGRAPH TOB BY THOMAS O'BRIEN

56"



4TSR56BZHABD

Bronze Housing with Hand-Rubbed Antique Brass

Bronze Carved Wood Blades

Frosted White Glass

METROGRAPH

TOB BY THOMAS O'BRIEN

EN★ LED DC

BLADES

(4) Blades (Included)
13° Blade Pitch
56" Blade Sweep

LAMPING

Integrated Downlight: 20W
Light Output: 1600 Lumens
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



A. Fixture Drop: 16.6"
B. Blade Drop: 12.4"
C. Housing Width: 8.6"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 178mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD Watts	TBD Watts
AIRFLOW	TBD CFM	TBD CFM
ENERGY COSTS	N/A	\$TBD Per Year
EFFICIENCY	TBD CFM/Watt	TBD CFM/Watt

For more information, go to
www.montecarlofans.com



4TSR56BZD
Bronze Housing
Bronze Carved Wood Blades
Frosted White Glass



4TSR56PNLGRYD
Polished Nickel Housing
Silver Carved Wood Blades
Frosted White Glass

DISCUS TRIO MAX

58"



REV

3DIR58RBD-V1

Roman Bronze Housing

Bronze/American Walnut Reversible Blades

Matte Opal Glass

DISCUS TRIO MAX

LED DAMP

BLADES

(3) Blades (Included)
16° Blade Pitch
58" Blade Sweep

LAMPING

Integrated Downlight: 18W
Light Output: 700 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 4-speed,
Reverse and Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 15.7"
- B. Blade Drop: 11.0"
- C. Housing Width: 11.1"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 172mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	69 Watts	43 Watts
AIRFLOW	5068 CFM	3527 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	70 Watts	42 Watts
AIRFLOW	1317 CFM	933 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	191 CFM/Watt	22 CFM/Watt



REV

3DIR58BSD-V1

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



3DIR58RZWD-V1

Matte White Housing
Matte White Blades
Matte Opal Glass

DISCUS TRIO

52"



3DIR52RZWD-V1
Matte White Housing
Matte White Blades
Matte Opal Glass



REV

3DIR52RBD-V1
 Roman Bronze Housing
 Bronze/American Walnut Reversible Blades
 Matte Opal Glass



REV

3DIR52BSD-V1
 Brushed Steel Housing
 Silver/American Walnut Reversible Blades
 Matte Opal Glass

DISCUS TRIO

LED DAMP

BLADES

(3) Blades (Included)
 16° Blade Pitch
 52" Blade Sweep

LAMPING

Integrated Downlight: 18W
 Light Output: 700 Lumens Net
 CCT: 2700K
 CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 4-speed,
 Reverse and Dimmer

FAN SPECIFICATIONS



A. Fixture Drop: 15.7"
 B. Blade Drop: 11.0"
 C. Housing Width: 11.1"
 D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 172mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	40 Watts
AIRFLOW	4669 CFM	3255 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	72 CFM/Watt	81 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	40 Watts
AIRFLOW	2464 CFM	1545 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	38 CFM/Watt	38 CFM/Watt

DISCUS CLASSIC

52"



REV

5DIC52RBD-V1

Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte Opal Glass



REV

5DIC52BSD-V1

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



5DIC52BKD-V1
Matte Black Housing | Matte Black Blades
Matte Opal Glass



5DIC52PND-V1
Polished Nickel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



5DIC52AGPD-V1
Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass



5DIC52WHD-V1
White Housing | White Blades
Matte Opal Glass

DISCUS CLASSIC

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

LAMPING

Integrated Downlight: 20W
Light Output: 1060 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"
B. Blade Drop: 10.6"
C. Housing Width: 11.1"
D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	4758 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	3217 CFM	2164 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	49 CFM/Watt	53 CFM/Watt

DISCUS CLASSIC II

44"



REV

5DIC44PND-V1

Polished Nickel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



REV

5DIC44RBD-V1

Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte Opal Glass



5DIC44BKD-V1
Matte Black Housing | Matte Black Blades
Matte Opal Glass



5DIC44AGPD-V1
Aged Pewter Housing | Light Grey Weathered Oak Blades
Matte Opal Glass



5DIC44BSD-V1
Brushed Steel Housing | Silver/American Walnut Reversible Blades
Matte Opal Glass



5DIC44WHD-V1
Matte White Housing | White Blades
Matte Opal Glass

DISCUS CLASSIC II

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
44" Blade Sweep

LAMPING

Integrated Downlight: 20W
Light Output: 1060 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"
B. Blade Drop: 10.6"
C. Housing Width: 11.1"
D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	3954 CFM	2854 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	68 CFM/Watt	77 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	3954 CFM	1970 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	68 CFM/Watt	53 CFM/Watt

DISCUS

52"



5DI52BKD-L
Matte Black Housing
Matte Black Blades
Matte Opal Glass



REV

5DI52RBD-L
Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte Opal Glass



REV

5DI52PND

Polished Nickel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



5DI52AGPD

Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass



REV

5DI52BSD-L

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



5DI52WHD-L

White Housing
White Blades
Matte Opal Glass

DISCUS

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

LAMPING

Downlight: (1) 75W Halogen Bulb (Included)


MOUNTING

See pg. 189

30° INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"

B. Blade Drop: 10.6"

C. Housing Width: 11.1"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	4758 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	3382 CFM	2164 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	52 CFM/Watt	53 CFM/Watt

DISCUS II

44"



REV

5DI44PND

Polished Nickel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



5DI44BKD

Matte Black Housing
Matte Black Blades
Matte Opal Glass

DISCUS II



REV

5DI44RBD

Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte Opal Glass



REV

5DI44BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



5DI44WHD

White Housing
White Blades
Matte Opal Glass

BLADES

(5) Blades (Included)
12° Blade Pitch
44" Blade Sweep

LAMPING

Downlight: (1) 75W Halogen Bulb (Included)


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"

B. Blade Drop: 10.6"

C. Housing Width: 11.1"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	3954 CFM	2850 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	68 CFM/Watt	77 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	3032 CFM	1970 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	52 CFM/Watt	53 CFM/Watt

SLEEK LED

52"



5SLR52BSD-V1
Brushed Steel Housing
Silver Blades
Matte Opal Glass

SLEEK LED

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

LAMPING

Integrated Downlight: 20W
(2)10W Medium LED Bulbs
Light Output: 800 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

See pg. 189


INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,
Reverse and Dimmer



5SLR52RBD-V1
Roman Bronze Housing
Roman Bronze Blades
Graduated Amber Glass

FAN SPECIFICATIONS



A. Fixture Drop: 15"
B. Blade Drop: 10.8"
C. Housing Width: 14.2"
D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	42 Watts
AIRFLOW	4432 CFM	3072 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	68 CFM/Watt	74 CFM/Watt



5SLR52WHD-V1
White Housing
White Blades
Matte Opal Glass

BONNEVILLE MAX

60"

BLADES

(5) Blades (Included)
13° Blade Pitch
60" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 17.3"
- B. Blade Drop: 14"
- C. Housing Width: 13.3"
- D. Downrod: 4" (additional lengths pg. 192)

Motor Size: 188mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	69 Watts	43 Watts
AIRFLOW	6149 CFM	4408 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	89 CFM/Watt	102 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	69 Watts	43 Watts
AIRFLOW	5504 CFM	3951 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	80 CFM/Watt	91 CFM/Watt



REV

5BHM60RB
Roman Bronze Housing
Bronze/American Walnut Reversible Blades



REV

5BHM60BS
Brushed Steel Housing
Silver/American Walnut Reversible Blades

DESIGNER MAX

52"



REV

5DM52RB
Roman Bronze Housing
Bronze/American Walnut Reversible Blades



REV

5DM52BS
Brushed Steel Housing
Silver/American Walnut Reversible Blades



5DM52RZW
Matte White Housing
Matte White Blades

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 13.1"
B. Blade Drop: 10.4"
C. Housing Width: 12.4"
D. Downrod: 4" (additional lengths pg. 192)

Motor Size: 188mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	39 Watts
AIRFLOW	5096 CFM	3526 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	80 CFM/Watt	91 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	39 Watts
AIRFLOW	4653 CFM	3238 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	84 CFM/Watt

EMBASSY MAX

60"



REV

5EM60PN

Polished Nickel Housing
Silver/American Walnut Reversible Blades



REV

5EM60RB

Roman Bronze Housing
Bronze/American Walnut Reversible Blades

EMBASSY MAX



REV

5EM60BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



5EM60RZW

Matte White / White Housing
Matte White Blades

BLADES

(5) Blades (Included)
13° Blade Pitch
60" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 14.8"
- B. Blade Drop: 12.5"
- C. Housing Width: 13.67"
- D. Downrod: 4" (additional lengths pg. 192)

Motor Size: 188mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	76 Watts	46 Watts
AIRFLOW	6145 CFM	4144 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	80 CFM/Watt	91 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	77 Watts	46 Watts
AIRFLOW	5757 CFM	3832 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	75 CFM/Watt	84 CFM/Watt

CENTRO MAX

52"



REV

5CQM52BS

Brushed Steel Housing

Silver/American Walnut Reversible Blades

CENTRO MAX



REV

5CQM52RB

Roman Bronze Housing
Bronze/American Walnut Reversible Blades



5CQM52RZW

Matte White Housing
Matte White Blades

BLADES

(5) Blades (Included)
14° Blade Pitch
52" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 14.2"

B. Blade Drop: 12.2"

C. Housing Width: 12.6"

D. Downrod: 4" (additional lengths pg. 192)

Motor Size: 188mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	63 Watts	40 Watts
AIRFLOW	5146 CFM	3762 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	82 CFM/Watt	94 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	63 Watts	40 Watts
AIRFLOW	4687 CFM	3393 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	74 CFM/Watt	84 CFM/Watt

CENTRO MAX II

44"



5QM44RZW
Matte White Housing
Matte White Blades

CENTRO MAX II



REV

5CQM44RB
Roman Bronze Housing
Bronze/American Walnut Reversible Blades



REV

5CQM44BS
Brushed Steel Housing
Silver/American Walnut Reversible Blades

BLADES

(5) Blades (Included)
14° Blade Pitch
44" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 13.1"
- B. Blade Drop: 12.1"
- C. Housing Width: 11"
- D. Downrod: 4" (additional lengths pg. 192)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	44 Watts	30 Watts
AIRFLOW	3252 CFM	2400 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	74 CFM/Watt	81 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	44 Watts	30 Watts
AIRFLOW	3068 CFM	2297 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	70 CFM/Watt	77 CFM/Watt

COLONY SUPER MAX PLUS

60"



REV

5CSM6ORBD

Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte White



5CSM60AGPD

Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte White

COLONY SUPER MAX PLUS

DAMP

BLADES

(5) Blades (Included)
12° Blade Pitch
60" Blade Sweep

LAMPING

Downlight: (3) 60W Candelabra Bulbs

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch




REV

5CSM60BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte White

FAN SPECIFICATIONS



- A. Fixture Drop: 18.5"
- B. Blade Drop: 11.5"
- C. Housing Width: 11.8"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 188mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	5510 CFM	3963 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	77 CFM/Watt	84 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	4851 CFM	3356 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	63 CFM/Watt	71 CFM/Watt



5CSM60RZWD

Matte White Housing
Matte White Blades
Matte White

COLONY SUPER MAX

60"



REV

5CSM60BS

Brushed Steel Housing

Silver/American Walnut Reversible Blades



5CSM60AGP

Aged Pewter Housing

Light Grey Weathered Oak Blades

COLONY SUPER MAX

DAMP

BLADES

(5) Blades (Included)

12° Blade Pitch

60" Blade Sweep

MOUNTING


See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,

Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 18.5"

B. Blade Drop: 11.5"

C. Housing Width: 11.8"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 188mm x 20mm



REV

5CSM6ORB

Roman Bronze Housing

Bronze/American Walnut Reversible Blades



5CSM6ORZW

Matte White Housing

Matte White Blades

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	5509 CFM	4096 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	76 CFM/Watt	87 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	4937 CFM	3633 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	68 CFM/Watt	77 CFM/Watt

COLONY MAX PLUS

52"



5COM52AGPD
Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte White



5COM52RZWD
Matte White Housing
Matte White Blades
Matte White

COLONY MAX PLUS

DAMP

BLADES

- (5) Blades (Included)
- 12° Blade Pitch
- 52" Blade Sweep

LAMPING

Downlight: (3) 60W Candelabra Bulbs (Included)

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch



REV

5COM52RBD

Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte White

FAN SPECIFICATIONS



A. Fixture Drop: 17.7"

B. Blade Drop: 11.5"

C. Housing Width: 11.8"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	4224 CFM	3164 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	73 CFM/Watt	85 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	2867 CFM	1900 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	49 CFM/Watt	51 CFM/Watt



REV

5COM52BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte White

COLONY MAX

52"



5COM52RZW
Matte White Housing
Matte White Blades



REV

5COM52BS
Brushed Steel Housing
Silver/American Walnut Reversible Blades

COLONY MAX

DAMP

BLADES

- (5) Blades (Included)
- 12° Blade Pitch
- 52" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 12.8"
- B. Blade Drop: 11.3"
- C. Housing Width: 11.8"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm



REV

5COM52RB

Roman Bronze Housing
Bronze/American Walnut Reversible Blades

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	4201 CFM	3123 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	72 CFM/Watt	84 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	2469 CFM	1748 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	42 CFM/Watt	47 CFM/Watt



5COM52AGP

Aged Pewter Housing
Light Grey Weathered Oak Blades

TRAVERSE

52"



5TV52WHD
White Housing
White Blades
Matte Opal Glass



5TV52BSD
Brushed Steel Housing
Silver Blades
Matte Opal Glass

TRAVERSE



5TV52RBD
 Roman Bronze Housing
 Roman Bronze Blades
 Graduated Amber Glass



5TV52AGPD
 Aged Pewter Housing
 Light Grey Weathered Oak Blades
 Matte Opal Glass

BLADES

(5) Blades (Included)
 12° Blade Pitch
 52" Blade Sweep

LAMPING

Downlight: (1) 75W Halogen Bulb (Included)

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
 Manual Reverse Switch
 Finishing Cap Included

FAN SPECIFICATIONS



- A. Fixture Drop: 12"
- B. Blade Drop: 6.4"
- C. Housing Width: 12.2"
- D. Downrod: N/A

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	41 Watts
AIRFLOW	2327 CFM	1737 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	39 CFM/Watt	43 CFM/Watt

PIPER

54"

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
54" Blade Sweep

LAMPING

Integrated Uplight 10W LED
Light Output: 700 Lumens Net
CCT: 2700K
CRI: 80+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Combo Hand-held/Wall Mount Remote,
3-speed, Reverse and Uplight Dimmer,
Optional Downlight Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 21.5"
- B. Blade Drop: 14.8"
- C. Housing Width: 11.2"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 153mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	68 Watts	40 Watts
AIRFLOW	5303 CFM	3730 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	78 CFM/Watt	92 CFM/Watt



5PPR54BS
Brushed Steel Housing
Silver ABS Blades
Integrated Uplight

54" PIPER
Brushed Steel Housing
Silver ABS Blades
Integrated Uplight



HAVEN 52
Brushed Steel Housing
Silver/American Walnut
Reversible Blades



TRADITIONAL

Artizan	132
Discus Ornate	134
Haven 52	126
Haven 52 LED 2	128
Haven 52 LED 3	130
Prairie II	122
Prairie	120
Prairie Grand	118
Strasburg	133
York 52	125
York 60	124

PRAIRIE GRAND

72"



14PRR72AGPD

Aged Pewter Housing

Distressed Grey Weathered Oak Blades

Frosted Lexan Diffuser

PRAIRIE GRAND

EN★ LED DAMP DC

BLADES

(14) Blades (Included)

14° Blade Pitch

72" Blade Sweep

LAMPING

Integrated Downlight: 15W

Light Output: 740 Lumens Net

CCT: 2700K

CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse and Dimmer, Finishing Cap

FAN SPECIFICATIONS



A. Fixture Drop: 14.1"

B. Blade Drop: 13.1"

C. Housing Width: 6.9"

D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 125mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	21 Watts
AIRFLOW	7519 CFM	5326 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	228 CFM/Watt	251 CFM/Watt



REV

14PRR72BSD

Brushed Steel Housing
Silver/Washed Oak Blades
Frosted Lexan Diffuser

PRAIRIE

62"

EN★ LED DAMP DC

BLADES

(14) Blades (Included)
14° Blade Pitch
62" Blade Sweep

LAMPING

Integrated Downlight: 15W
Light Output: 740 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer, Finishing Cap

FAN SPECIFICATIONS



- A. Fixture Drop: 14.1"
- B. Blade Drop: 13.1"
- C. Housing Width: 6.9"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 125mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	23 Watts
AIRFLOW	7233 CFM	5003 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	220 CFM/Watt	221 CFM/Watt



14PRR62AGPD
Aged Pewter Housing
Distressed Grey Weathered Oak Blades
Frosted Lexan Diffuser



REV
14PRR62BSD
Brushed Steel Housing
Silver/Washed Oak Blades
Frosted Lexan Diffuser

62" PRAIRIE
Aged Pewter Housing
Distressed Grey Weathered Oak Blades
Frosted Lexan Diffuser



PRAIRIE II

52"

EN★ LED DAMP DC

BLADES

(14) Blades (Included)
14° Blade Pitch
52" Blade Sweep

LAMPING

Integrated Downlight: 15W
Light Output: 740 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed,
Reverse and Dimmer, Finishing Cap

FAN SPECIFICATIONS



- A. Fixture Drop: 14.1"
- B. Blade Drop: 13.1"
- C. Housing Width: 6.9"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 125mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	23 Watts	16 Watts
AIRFLOW	5069 CFM	3310 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	220 CFM/Watt	211 CFM/Watt



REV

14PRR52BSD

Brushed Steel Housing
Silver/Washed Oak Blades
Frosted Lexan Diffuser



14PRR52AGPD

Aged Pewter Housing
Distressed Grey Weathered Oak Blades
Frosted Lexan Diffuser

52" PRAIRIE II
Brushed Steel Housing
Washed Oak Blades
Frosted Lexan Diffuser



YORK 60

60"

BLADES

(5) Blades (Included)

12° Blade Pitch

60" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 14.3"

B. Blade Drop: 11.3"

C. Housing Width: 12.4"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 188mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	71 Watts	45 Watts
AIRFLOW	6191 CFM	4419 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	87 CFM/Watt	99 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	71 Watts	45 Watts
AIRFLOW	4601 CFM	2809 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	64 CFM/Watt	63 CFM/Watt



5YK60BK

Matte Black Housing with Aged Brass
Matte Black Blades



5YK60AGP

Aged Pewter Housing
Light Grey Weathered Oak Blades

YORK 52

52"



5YK52BK
Matte Black Housing with Aged Brass
Matte Black Blades



5YK52AGP
Aged Pewter Housing
Light Grey Weathered Oak Blades

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 14.3"
B. Blade Drop: 11.3"
C. Housing Width: 12.4"
D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	39 Watts
AIRFLOW	4851 CFM	3645 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	80 CFM/Watt	93 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	39 Watts
AIRFLOW	3844 CFM	2769 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	64 CFM/Watt	71 CFM/Watt

HAVEN 52

52"



REV

5HV52CH

Chrome Housing

Silver/American Walnut Reversible Blades



5HV52BK

Matte Black Housing

Matte Black Blades



REV

5HV52BZ

Bronze Housing
Bronze/American Walnut Reversible Blades



REV

5HV52BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



5HV52RZW

Matte White Housing
Matte White Blades

HAVEN 52

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 14.6"
B. Blade Drop: 11.7"
C. Housing Width: 10.3"
D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4402 CFM	3241 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	74 CFM/Watt	86 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4026 CFM	3013 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	68 CFM/Watt	80 CFM/Watt

HAVEN 52 LED 2

52"



5HV52RZWD
Matte White Housing
Matte White Blades
Matte White Glass



5HV52BKD
Matte Black Housing
Matte Black Blades
Matte White Glass



REV

5HV52BZD

Bronze Housing | Bronze/American Walnut Reversible Blades
Matte White Glass



REV

5HV52BSD

Brushed Steel Housing | Silver/American Walnut Reversible Blades
Matte White Glass



REV

5HV52BPD

Brushed Pewter Housing | Silver/American Walnut Reversible Blades
Matte White Glass



REV

5HV52CHD

Chrome Housing | Silver/American Walnut Reversible Blades
Matte White Glass

HAVEN 52 LED 2

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

LAMPING

Downlight: (2) 10W LED Bulbs
Light Output: 800 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 19.3"
- B. Blade Drop: 11.7"
- C. Housing Width: 10.3"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4355 CFM	3241 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	86 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4068 CFM	3020 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	68 CFM/Watt	80 CFM/Watt

HAVEN 52 LED 3

52"



5HV52BKF
Matte Black Housing
Matte Black Blades
Matte White Glass



REV

5HV52BZF
Bronze Housing
Bronze/American Walnut Reversible Blades
Matte White Glass



REV

5HV52BSF

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte White Glass



REV

5HV52BPF

Brushed Pewter Housing
Silver/American Walnut Reversible Blades
Matte White Glass



REV

5HV52CHF

Chrome Housing
Silver/American Walnut Reversible Blades
Matte White Glass



5HV52RZWF

Matte White Housing
Matte White Blades
Matte White Glass

HAVEN 52 LED 3

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

LAMPING

Downlight: (3) 10W LED
Light Output: 800 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 20.6"
- B. Blade Drop: 11.7"
- C. Housing Width: 10.3"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4344 CFM	3225 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	85 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4135 CFM	3039 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	69 CFM/Watt	80 CFM/Watt

ARTIZAN

56"

LED DAMP

BLADES

(5) Blades (Included)
12° Blade Pitch
56" Blade Sweep

LAMPING

Integrated Uplight: 10W
Light Output: 660 Lumens Net
CCT: 2700K
CRI: 80+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 3-speed, Reverse and Uplight
Dimmer, Optional Downlight Dimmer

FAN SPECIFICATIONS



- A. Fixture Drop: 17.4"
- B. Blade Drop: 14.3"
- C. Housing Width: 11.9"
- D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 188mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	73 Watts	44 Watts
AIRFLOW	5521 CFM	3669 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	76 CFM/Watt	83 CFM/Watt



5AZR56RB
Roman Bronze Housing
Walnut Carved Wood Blades



5AZR56AGP
Aged Pewter Housing
Light Grey Weathered Oak Carved Wood Blades

STRASBURG

56"

BLADES

(5) Blades (Included)

13° Blade Pitch

56" Blade Sweep

LAMPING

Uplight:

(3) Candelabra 25W Bulbs

Downlight:

(2) Halogen 50W Bulbs

INCLUDED CONTROLS/ACCESSORIES

Two-in-one Remote, Combo Hand-held/Wall Mount, Up/Downlight Control, Manual Reverse Switch



55BR56TBD-L
Tuscan Bronze Housing
Mahogany Veneer Blades
Tea Stain Mission Glass

FAN SPECIFICATIONS



A. Fixture Drop: 22.2"

B. Blade Drop: 14.2"

C. Housing Width: 14.9"

D. Downrod: 10" (additional lengths pg. 192)

Motor Size: 188mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	84 Watts	53 Watts
AIRFLOW	6225 CFM	4298 CFM
ENERGY COSTS	N/A	\$15 Per Year
EFFICIENCY	74 CFM/Watt	82 CFM/Watt

DISCUS ORNATE

52"



5DIO52BKD
Matte Black Housing
Matte Black Blades
Matte Opal Glass

DISCUS ORNATE

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

LAMPING

Integrated Downlight: 20W
Light Output: 715 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"

B. Blade Drop: 10.6"

C. Housing Width: 11.1"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	4758 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt



REV

5DIO52RBD

Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte Opal Glass



5DIO52AGPD

Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass

56" DYLAN
Aged Brass Housing
Dark Walnut ABS Blades



OUTDOOR

Boynton	143
Cruise	144
Cyclone	138
Delray	140
Discus Outdoor	146
Dylan	142
Haven 44 Outdoor	152
Haven 52 Outdoor	150
Haven 52 Outdoor LED	148

CYCLONE

60"



5CY60BK
Matte Black Housing
Matte Black Grain ABS Blades



5CY60RB
 Roman Bronze Housing
 American Walnut Grain ABS Blades



5CY60WH
 White Housing
 White Grain ABS Blades

CYCLONE

WET

BLADES

(5) Blades (Included)
 13° Blade Pitch
 60" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
 Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 14.0"
- B. Blade Drop: 11.3"
- C. Housing Width: 12.8"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 212mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	81 Watts	52 Watts
AIRFLOW	6666 CFM	4890 CFM
ENERGY COSTS	N/A	\$15 Per Year
EFFICIENCY	82 CFM/Watt	93 CFM/Watt

DELRAY

56"

WET DC

BLADES

(3) Blades (Included)
17° Blade Pitch
56" Blade Sweep

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse

FAN SPECIFICATIONS



A. Fixture Drop: 15.8"
B. Blade Drop: 15.1"
C. Housing Width: 9"
D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 125mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	43 Watts	29 Watts
AIRFLOW	5583 CFM	4035 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	174 CFM/Watt	139 CFM/Watt



3DLR56RB

Roman Bronze Housing
Dark Walnut ABS Blades



3DLR56AGP

Aged Pewter Housing
Light Grey Weathered Oak ABS Blades



3DLR56RZW

Matte White Housing
Matte White ABS Blades

56" DELRAY
Roman Bronze Housing
Dark Walnut ABS Blades



DYLAN

56"

WET DC

BLADES

(3) Blades (Included)

16° Blade Pitch

56" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 6-speed, Reverse

FAN SPECIFICATIONS



A. Fixture Drop: 16.5"

B. Blade Drop: 15"

C. Housing Width: 11.3"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	43 Watts	25 Watts
AIRFLOW	8550 CFM	6137 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	241 CFM/Watt	241 CFM/Watt



3DYZ56AGB

Aged Brass Housing
Dark Walnut ABS Blades



3DYZ56AGP

Aged Pewter Housing
Light Grey Weathered Oak ABS Blades

BOYNTON

54"

LED WET

BLADES

(3) Blades (Included)
14° Blade Pitch
54" Blade Sweep

LAMPING

Integrated Downlight: 14W
Light Output: 580 Lumens Net
CCT: 2700K
CRI: 90+

MOUNTING

See pg. 189


INCLUDED CONTROLS/ACCESSORIES

Hand-held Remote, 4-speed,
Reverse and Dimmer



3BTR54ANBZD
Antique Bronze Housing
Light Grey Weathered ABS Blades
Clear Seeded Glass with Frosted Diffuser

FAN SPECIFICATIONS



A. Fixture Drop: 19.8"
B. Blade Drop: 13.6"
C. Housing Width: 7.8"
D. Downrod: 6" (additional lengths pg. 192)

Motor Size: 172mm x 20mm



3BTR54PBSD
Painted Brushed Steel Housing
Painted Brushed Steel ABS Blades
Clear Seeded Glass with Frosted Diffuser

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	5687 CFM	3929 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	87 CFM/Watt	97 CFM/Watt

CRUISE

52"

WET

BLADES

(5) Blades (Included)

13° Blade Pitch

52" Blade Sweep

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,

Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 14"

B. Blade Drop: 10.9"

C. Housing Width: 10.4"

D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 172mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	68 Watts	42 Watts
AIRFLOW	4324 CFM	3238 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	64 CFM/Watt	76 CFM/Watt



5CU52RB

Roman Bronze Housing
American Walnut ABS Blades



5CU52WH

White Housing
White ABS Blades

52" CRUISE
Roman Bronze Housing
American Walnut ABS Blades



DISCUS OUTDOOR

52"



5DIW52WHD
White Housing
White ABS Blades
Matte Opal Glass

DISCUS OUTDOOR

LED WET

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

LAMPING

Integrated Downlight: 20W
Light Output: 715 Lumens Net
CCT: 2700K
CRI: 90+


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 15.1"
- B. Blade Drop: 10.6"
- C. Housing Width: 11.1"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	66 Watts	41 Watts
AIRFLOW	4781 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt



5DIW52RBD
Roman Bronze Housing
Roman Bronze ABS Blades
Matte Opal Glass



5DIW52PBSD
Painted Brushed Steel Housing
Painted Brushed Steel ABS Blades
Matte Opal Glass

HAVEN 52 OUTDOOR LED 52"



5HVO52BZD
Bronze Housing
Bronze ABS Blades
Matte White Glass

HAVEN 52 OUTDOOR LED

LED WET

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

LAMPING

Downlight: (2) 10W LED Bulbs
Light Output: 800 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 19.2"
B. Blade Drop: 11.7"
C. Housing Width: 10.3"
D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	59 Watts	36 Watts
AIRFLOW	4510 CFM	3228 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	77 CFM/Watt	90 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	59 Watts	36 Watts
AIRFLOW	4072 CFM	2956 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	69 CFM/Watt	82 CFM/Watt



5HVO52BKD
Matte Black Housing
Matte Black ABS Blades
Matte White Glass



5HVO52RZWD
Matte White Housing
Matte White ABS Blades
Matte White Glass

HAVEN 52 OUTDOOR

52"



5HVO52RZW
Matte White Housing
Matte White ABS Blades

HAVEN 52 OUTDOOR

WET

BLADES

- (5) Blades (Included)
- 12° Blade Pitch
- 52" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

- Pull Chain Operation, 3-speed,
- Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 14.6"
- B. Blade Drop: 11.7"
- C. Housing Width: 10.3"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 15mm



5HVO52BK
Matte Black Housing
Matte Black ABS Blades



5HVO52BZ
Bronze Housing
Bronze ABS Blades

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	59 Watts	36 Watts
AIRFLOW	4482 CFM	3206 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	76 CFM/Watt	89 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	59 Watts	36 Watts
AIRFLOW	4102 CFM	2956 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	70 CFM/Watt	82 CFM/Watt

HAVEN 44 OUTDOOR

44"



5HVO44BK
Matte Black Housing
Matte Black ABS Blades

HAVEN 44 OUTDOOR

WET

BLADES

(5) Blades (Included)
12° Blade Pitch
44" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 14.6"
- B. Blade Drop: 11.7"
- C. Housing Width: 10.3"
- D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 15mm



5HVO44BZ
Bronze Housing
Bronze ABS Blades



5HVO44RZW
Matte White Housing
Matte White ABS Blades

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	36 Watts
AIRFLOW	4025 CFM	2900 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	69 CFM/Watt	81 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	36 Watts
AIRFLOW	3913 CFM	2740 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	67 CFM/Watt	77 CFM/Watt

MICRO 24"
White Housing
White Blades



MINI

Colony II	158
Micro 24	156
Mini 20	160

MICRO 24
24"



3TF24PN
Polished Nickel Housing
Silver Blades

MICRO 24

BLADES

- (3) Blades (Included)
- 14° Blade Pitch
- 24" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



- A. Fixture Drop: 13.2"
- B. Blade Drop: 9.7"
- C. Housing Width: 7.6"
- D. Downrod: 4" (additional lengths pg. 192)

Motor Size: 153mm x 10mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	40 Watts	24 Watts
AIRFLOW	1474 CFM	1120 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	37 CFM/Watt	47 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	40 Watts	24 Watts
AIRFLOW	1441 CFM	1088 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	36 CFM/Watt	46 CFM/Watt



3TF24WH
White Housing
White Blades

COLONY II

28"



4CO28BK
Matte Black Housing
Matte Black Blades

COLONY II



4CO28RB
Roman Bronze Housing
Teak Blades



4CO28BP
Brushed Pewter Housing
Silver Blades



4CO28WH
White Housing
White Blades

BLADES

(4) Blades (Included)
18° Blade Pitch
28" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 12.4"
B. Blade Drop: 9.4"
C. Housing Width: 8.3"
D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	49 Watts	30 Watts
AIRFLOW	2102 CFM	1483 CFM
ENERGY COSTS	N/A	\$9 Per Year
EFFICIENCY	43 CFM/Watt	49 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	49 Watts	30 Watts
AIRFLOW	1550 CFM	1047 CFM
ENERGY COSTS	N/A	\$9 Per Year
EFFICIENCY	32 CFM/Watt	34 CFM/Watt

MINI 20
20"



4MC20BS
Brushed Steel Housing
Silver ABS Blades



4MC20RB
 Roman Bronze Housing
 Roman Bronze ABS Blades



4MC20WH
 White Housing
 White ABS Blades

MINI 20

BLADES

(4) Blades (Included)
 12° Blade Pitch
 20" Blade Sweep


MOUNTING

See pg. 189

INCLUDED CONTROLS/ACCESSORIES

Pull Chain Operation, 3-speed,
 Manual Reverse Switch

FAN SPECIFICATIONS



A. Fixture Drop: 12.0"
 B. Blade Drop: 8.9"
 C. Housing Width: 7.1"
 D. Downrod: 4.5" (additional lengths pg. 192)

Motor Size: 153mm x 10mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	39 Watts	26 Watts
AIRFLOW	1248 CFM	1058 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	32 CFM/Watt	41 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	39 Watts	26 Watts
AIRFLOW	1246 CFM	1023 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	32 CFM/Watt	40 CFM/Watt

60" MAVERICK
Burnished Brass Maverick Finish Kit
Matte White Hand-Carved Balsa Wood Blades



ACCESSORIES

Bowl Caps	183
Canopies	181
Fan Controls	165
Finishing Caps	182
Fitter Glass	180
Fitters	179
Light Kits	174
Maverick Finish Kits	184



NEO REMOTE CONTROLS

The NEO remote control is complete with both a magnet and a wall holster. It can fit anywhere in the home for easy access, and with its sleek profile, it complements any décor.

UNIVERSAL CAPABILITY

MCRC1 works with virtually all Monte Carlo pull-chain fans. The receiver is installed into the canopy of most standard, non-remote 3-speed fans.

HAND-HELD OR WALL MOUNTED HOLSTER

Transmitter operates all functions while in the wireless, low-profile wall holster. The holster fits over standard switch plates, or can be mounted elsewhere.

MAGNETIZED TRANSMITTER

Attaches to metal surfaces for easy access.

SPEED CONTROL WITH LED SPEED INDICATOR

Single-button speed control with blue speed-indicator lights.

FOUR SPEEDS

Low, low/medium, medium/high, and high speeds.

CONTROL CFL, INCANDESCENT OR LED

On/Off or dimming capability via dip switch on receiver.

60,000+ FREQUENCIES

Good for any large hotel, condo, or apartment projects to eliminate frequency interference.

BATTERY OPERATED HAND-HELD

Hand-helds include an extra battery in the box.

2,000W SURGE PROTECTION

Twice the industry standard of 1000W.

WIRED WALL REMOTE CONTROL AVAILABLE

Ultimate control, with wired and hand-held controls able to work in concert.

NEO Functionality Chart

Complete System (Transmitter and Receiver)

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC1	X	X		X	MCRC1
MCRC1R	X	X	X	X	MCRC1RBP/BS/PN/RB/RZW
MCRC3	X	X		X	MCRC3
MCRC3R	X	X	X	X	MCRC3RBP/BS/PN/RB

Transmitter Only

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC1T	X	X		X	MCRC1T
MCRC1RT	X	X	X	X	MCRC1RT
MCRC3W	X	X		X	MCRC3W
MCRC3RW	X	X	X	X	MCRC3RW

Receiver Only

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC-RC1	X	X		X	MCRC-RC1
MCRC-RC1R	X	X	X	X	MCRC-RC1R

NEO MAGNETIC HAND-HELD & WALL MOUNT

Battery Operated | Hard Wired



MCR C1 (Universal)

- Hand-Held or Wall Mount
- Works with virtually all pull-chain fans
- Non-reversing fan and light control
- Canopy installed receiver
- Can be used with MCR C3



(Transmitter)



(Receiver)

TRANSMITTER & FAN RECEIVER MCR C1

TRANSMITTER ONLY MCR C1T



MCR C3 (Universal)

- Wall Mount Only
- Works with virtually all pull-chain fans
- Non-reversing fan and light control
- Canopy installed receiver
- Includes white and almond face plates
- Can be used with MCR C1



(Transmitter)



(Receiver)

TRANSMITTER & FAN RECEIVER MCR C3

TRANSMITTER ONLY MCR C3W

COMPATIBLE FANS WITH MCR C1 AND MCR C3

Bonneville Max	pg. 96	Cyclone	pg. 138	Mini 20	pg. 160
Centro Max	pg. 100	Designer Max	pg. 97	Studio	pg. 72
Centro Max II	pg. 102	Discus Collection	pg. 82	Vision Max	pg. 46
Colony Max Collection	pg. 104	Embassy Max	pg. 98	York 52	pg. 125
Colony II	pg. 158	Haven Collection	pg. 126	York 60	pg. 124
Cruise	pg. 144	Micro 24	pg. 156		



MCRC1R

- Hand-Held or Wall Mount
- Reversing fan and downlight control
- Switch housing replacement receiver
- Can be used with MCRC3R



(Transmitter)



(Receiver)

TRANSMITTER & FAN RECEIVER

- MCRC1RBP (White/Brushed Pewter)
- MCRC1RBS (White/Brushed Steel)
- MCRC1RPN (White/Polished Nickel)
- MCRC1RRB (White/Roman Bronze)
- MCRC1RRZW (White/Matte White)

TRANSMITTER ONLY

- MCRC1RT

COMPATIBLE FANS WITH MCRC1R

- | | |
|----------------|---------|
| Bonneville Max | pg. 96 |
| Centro Max | pg. 100 |
| Centro Max II | pg. 102 |
| Designer Max | pg. 97 |
| Embassy Max | pg. 98 |



MCRC3R

- Wall Mount Only
- Reversing fan and downlight control
- Switch housing replacement receiver
- Includes white and almond face plates
- Can be used with MCRC1R



(Transmitter)



(Receiver)

TRANSMITTER & FAN RECEIVER

- MCRC3RBP (White & Almond/Brushed Pewter)
- MCRC3RBS (White & Almond/Brushed Steel)
- MCRC3RPN (White & Almond/Polished Nickel)
- MCRC3RRB (White & Almond/Roman Bronze)
- MCRC3RRZW (White & Almond/Matte White)

TRANSMITTER ONLY

- MCRC3RW

COMPATIBLE FANS WITH MCRC3R

- | | |
|----------------|---------|
| Bonneville Max | pg. 96 |
| Centro Max | pg. 100 |
| Centro Max II | pg. 102 |
| Designer Max | pg. 97 |
| Embassy Max | pg. 98 |

COMBO WALL-MOUNT, HAND-HELD WALL CONTROL



CK250 (Combo Wall-Mount/Hand-held kit)

- Non-reversing fan and dimming downlight control
- Canopy installed receiver
- 3-speed
- Battery-operated hand-held transmitter or wall control (no hardwiring required)
- Dip switch control offering 16 different frequencies
- 1,000W surge protection
- White and almond face plates included



(Transmitter)



(Receiver)



(Includes Enclosure for Hand-Held Use)

TRANSMITTER ONLY

CT100 (does not reverse fan)



CK300 (Combo Wall-Mount/Hand-held kit)

- Reversing fan and dimming downlight control
- Switch housing installed receiver
- 3-speed
- Battery-operated hand-held transmitter or wall control (no hardwiring required)
- Dip switch control offering 16 different frequencies
- 1,000W surge protection
- White and almond face plates included



(Transmitter)



(Receiver)



(Includes Enclosure for Hand-Held Use)

TRANSMITTER ONLY

CT150

COMPATIBLE FANS WITH CK250

Bonneville Max	pg. 96	Micro 24	pg. 156
Colony Max Collection	pg. 104	Mini 20	pg. 160
Colony II	pg. 158	Studio	pg. 72
Cruise	pg. 144	Vision Max	pg. 46
Cyclone	pg. 138	York 52	pg. 125
Designer Max	pg. 97	York 60	pg. 124
Discus Collection	pg. 82		
Embassy Max	pg. 98		
Haven Collection	pg. 126		

COMPATIBLE FANS WITH CK300

Colony II	pg. xx
Cruise	pg. xx
Cyclone	pg. xx
Micro 24	pg. xx
Mini 20	pg. xx
Studio	pg. xx



ESWC-1 (Wall Control)

- Rotary-style fan wall control
- 3-speed
- Includes ivory and white knobs
- Face plate not included



ESSWC-3-WH (Wall Control)

- Converts standard two-wire wall switch to a four-speed (High, Medium/High, Medium, Low) fan control

COMPATIBLE FANS WITH ESWC-1 & ESSWC-3-WH

Bonneville Max	pg. 96	Haven 52	pg. 126
Centro Max	pg. 100	Haven 52 Outdoor	pg. 150
Centro Max II	pg. 102	Haven 44 Outdoor	pg. 152
Colony Max	pg. 110	Micro 24	pg. 156
Colony Super Max	pg. 108	Mini 20	pg. 160
Colony II	pg. 158	Studio	pg. 72
Cruise	pg. 144	York 52	pg. 125
Designer Max	pg. 97	York 60	pg. 124
Embassy Max	pg. 98		

WALL-MOUNT CONTROLS



ESSWC-4-WH (Wall Control)

- For use with extra heavy duty 212mm motors
- Converts standard two-wire wall switch to a heavy duty (212mm motor fans) four-speed (high, medium/high, medium, low) fan control



ESSWC-5-WH (Wall Control)

- Converts standard wall switch to fan and on/off light control
- Wall switch must have three wires, (with two hot leads) to operate both fan and light separately

COMPATIBLE FANS WITH ESSWC-4

Cyclone pg. 138

COMPATIBLE FANS WITH ESSWC-5

Colony II pg. 158
 Cruise pg. 144
 Cyclone pg. 138
 Discus Ornate pg. 134
 Discus Outdoor pg. 146
 Micro 24 pg. 156
 Mini 20 pg. 160
 Studio pg. 72



ESSWC-6-WH (Wall Control)

- 4-speed wall control
- Converts standard wall switch to a multi-function fan and light control
- Wall switch must have three wires, (with two hot leads) to operate both fan and light separately



ESSWC-7-WH (Wall Control)

- 6-speed wall transmitter
- Reversing fan and light control
- LED light dimmer

COMPATIBLE FANS WITH ESSWC-6

Bonneville Max	pg. 96	Discus Outdoor	pg. 146
Centro Max	pg. 100	Embassy Max	pg. 98
Centro Max II	pg. 102	Micro 24	pg. 156
Colony Max	pg. 110	Mini 20	pg. 160
Colony Super Max	pg. 106	Studio	pg. 72
Colony II	pg. 158		
Cruise	pg. 144		
Designer Max	pg. 97		
Discus Ornate	pg. 134		

COMPATIBLE FANS WITH ESSWC-7-WH

Minimalist	pg. 30
Minimalist Max	pg. 28
Maverick	pg. 22
Maverick Grand	pg. 12
Maverick Max	pg. 18
Maverick Super Max	pg. 14

	NEO REMOTE CONTROL KIT		NEO TRANSMITTER ONLY	COMBO HAND-HELD/ WALL REMOTE KIT	
	MCRC1 MCRC3	MCRC1R MCRC3R	MCRC1T MCRC3W	CK250	CK300
Bonneville Max	x	x	x	x	
Centro Max	x	x	x	x	
Centro Max II	x	x	x	x	
Colony II	x		x	x	x
Colony Max	x		x	x	
Colony Max Plus	x		x	x	
Colony Super Max	x		x	x	
Colony Super Max Plus	x		x	x	
Cruise	x		x	x	x
Cyclone	x		x	x	x
Designer Max	x	x	x	x	
Designer Max II	x	x	x	x	
Discus	x		x	x	
Discus II	x		x	x	
Discus Classic	x		x	x	
Discus Classic II	x		x	x	
Discus Ornate	x		x	x	
Discus Outdoor	x		x	x	
Embassy Max	x	x	x	x	
Haven 52	x		x	x	
Haven 52 LED 2	x		x	x	
Haven 52 LED 3	x		x	x	
Haven 44 Outdoor	x		x	x	
Haven 52 Outdoor	x		x	x	
Haven 52 Outdoor LED	x		x	x	
Micro 24	x		x	x	x
Mini 20	x		x	x	x
Studio	x		x	x	x
Traverse	x		x	x	
York 52	x		x	x	
York 60	x		x	x	

DIRECT WIRED WALL CONTROLS

	ESWC-1	ESSWC-3	ESSWC-4	ESSWC-5	ESSWC-6
Bonneville Max	x	x		x	x
Centro Max	x	x		x	x
Centro Max II	x	x		x	x
Colony II	x	x		x	x
Colony Max	x	x		x	x
Colony Max Plus				x	x
Colony Super Max	x	x		x	x
Colony Super Max Plus				x	x
Cruise	x	x		x	x
Cyclone			x		
Designer Max	x	x		x	x
Designer Max II	x	x		x	x
Discus				x	x
Discus II				x	x
Discus Classic				x	x
Discus Classic II				x	x
Discus Ornate				x	x
Discus Outdoor				x	x
Embassy Max	x	x		x	x
Haven 52	x	x		x	x
Haven 52 LED 2				x	x
Haven 52 LED 3				x	x
Haven 44 Outdoor	x	x		x	x
Haven 52 Outdoor	x	x		x	x
Haven 52 Outdoor LED				x	x
Micro 24	x	x		x	x
Mini 20	x	x		x	x
Studio	x	x		x	x
Traverse				x	x
York 52	x	x		x	x
York 60	x	x		x	x

Can't find the fan you are looking for?

This means it is offered with its own remote control, included in the box.
For remote control details, please check the fan's product page.

All remote controls are indoor rated only



MC236BS
White Organza Shade
Brushed Steel



MC236RB
White Organza Shade
Roman Bronze

MC236 | WHITE ORGANZA SHADE

- H: 5" W: 11.5"
- (3) Mini-Candelabra 50W Halogen Bulbs (Included)



MC07RB-B WET
Roman Bronze



MC07PWH-B WET
White

MC07 | OPAL TEARDROP GLASS

- H: 4.75" W: 10.25"
- (2) 13W CFL Bulbs (Included)



MC224BS
Brushed Steel



MC224RB
Roman Bronze



MC224RZW
Matte White

MC224 | HUGGER LIGHT FROSTED GLASS

- H: 4.46" W: 12.4"
- (3) Candelabra 40W Bulbs (Included)



MC214BS
Brushed Steel

MC214BS | LIGHT MATTE OPAL GLASS

- H: 6.1" W: 7.32"
- (1) GU24 23W CFL Bulb (Included)

MC84RB-L | SCHOOLHOUSE WHITE GLASS

- H: 7" W: 9"
- (1) Candelabra 60W Bulb (Included)



MC84RB-L WET
Roman Bronze

MC18

- H: 3.875" W: 10"
- (1) E-27 13W CFL Bulb (Included)



MC18PN
Polished Nickel



MC18WH-B
White



MC18RB-B
Roman Bronze



MC18BS-B
Brushed Steel

MC04-L | WHITE FAUX ALABASTER GLASS

- H: 7" W: 12"
- (3) Candelabra 60W Bulbs (Included)
- (3) Bowl Caps (Included): Brushed Steel, Roman Bronze, and White



Brushed Steel



Roman Bronze



White



MC04-L
White Faux Alabaster Glass
(Shown with Brushed Steel Bowl Cap)

MC144 | CRACKLE BOWL AMBER GLASS

- H: 7" W: 12.65"
- (3) Candelabra 60W Bulbs (Included)
- (1) Bowl Cap (Included): Roman Bronze



Roman Bronze



MC144
Crackle Bowl Amber Glass



MC165-L
Mission Bowl Tea Stain Mission
Glass

MC165-L | MISSION BOWL TEA STAIN
MISSION GLASS
- H: 7" W: 12.65" | H: 8.625"
- (3) Candelabra 60W Bulbs (Included)



MC49-L
White Faux Alabaster Glass



Brushed Steel



White

MC49-L | WHITE FAUX ALABASTER GLASS
- H: 5.5" W: 11"
- (3) Candelabra 60W Bulbs (Included)
- (2) Bowl Caps Included: Brushed Steel and White



MC79-L
Antler Bowl, Antique White Scavo Glass

MC79-L | ANTLER BOWL, ANTIQUE WHITE
SCAVO GLASS
- H: 7" W: 11" | H: 9"
- (3) Candelabra 60W Bulbs (Included)



MC239BS
Clear Glass | Brushed Steel



MC239RZW
Clear Glass | Matte White

MC239 | CLEAR GLASS LED
- H: 5" W: 10"
- 17W LED | 2,700K | 530 Lumens Net | CRI 90+
- Compatible with Piper (pg. 226)

MC240 | SEEDED GLASS **LED**
 - H: 5.1" W: 10.2"
 - 17W LED | 2,700K | 610 Lumens Net | CRI 90+
 - Compatible with Artizan (pg. 226)



MC240RB
 Seeded Glass | Roman Bronze

MC242 | MATTE OPAL GLASS **DAMP**
 - H: 4.9" W: 11.75"
 - (3) Candelabra 60W Bulbs (Included)



MC242BS
 Matte Opal Glass | Brushed Steel



MC242RB
 Matte Opal Glass | Roman Bronze



MC242RZW
 Matte Opal Glass | Matte White

MC243 | MATTE OPAL GLASS **LED DAMP**
 - H: 3.8" W: 12.3"
 - 10W
 - (3) Medium A19 LED Bulbs (Included)
 - 3000K | 800 Lumens Net | CRI 90+



MC243RB
 Matte Opal Glass | Roman Bronze



MC243BS
 Matte Opal Glass | Brushed Steel



MC243RZW
 Matte Opal Glass | Matte White

MC244 | MATTE OPAL GLASS **LED DAMP**
 - H: 3.8" W: 12.8"
 - 10W | (3) Medium A19 LED Bulbs (Included)
 - 3000 | 800 Lumens Net | CRI 90+



MC244WH
 Matte Opal Glass
 Matte White



MC244RB
 Matte Opal Glass
 Roman Bronze

LIGHT KITS



MC245BS
Matte Opal Glass
Brushed Steel



MC245RB
Matte Opal Glass | Roman Bronze



MC245RZW
Matte Opal Glass | Matte White

MC245 | MATTE OPAL GLASS LED DAMP
- H: 4" W: 12"
- 10W | (3) Medium A19 LED Bulbs (Included)
- 3000K | 800 Lumens Net | CRI 90+



MC246WH
Matte Opal Glass
White



MC246RB
Matte Opal Glass
Roman Bronze

MC246 | MATTE OPAL GLASS LED DAMP
- H: 4.5" W: 12"
- 10W | (3) Medium A19 LED Bulbs (Included)
- 3000K | 800 Lumens Net | CRI 90+



MC247BS
Matte Opal Glass
Brushed Steel



MC247RB
Matte Opal Glass | Roman Bronze



MC247RZW
Matte Opal Glass | Matte White

MC247 | MATTE OPAL GLASS LED DAMP
- H: 3.8" W: 15.7"
- 10W | (3) Medium A19 LED Bulbs (Included)
- 3000K | 800 Lumens Net | CRI 90+

H3 | 3-LIGHT FITTER

- H: 3.5" W: 6.5"
- (3) Candelabra 40W Bulbs (Included)
- Compatible with 2.25" Neck Glass Only (Sold Separately, pg. 180)



H3BS-L
Brushed Steel



H3RB-L
Roman Bronze

H4 | 4-LIGHT FITTER

- H: 3.5" W: 6.5"
- (4) Candelabra 40W Bulbs (Included)
- Compatible with 2.25" Neck Glass Only (Sold Separately, pg. 180)



H4RB-L
Roman Bronze



H4BS-L
Brushed Steel



H4WH-L
White



H4BP-L
Brushed Pewter

MC37 | 4-LIGHT FITTER

- H: 3.5" W: 6.5"
- (4) Candelabra 40W Bulbs (Included)
- Compatible with 2.25" Neck Glass Only (Sold Separately, pg. 180)



MC37RB-L
Roman Bronze

MC73 | 4-LIGHT FITTER

- H: 3.5" W: 6.5"
- (4) Candelabra 40W Bulbs (Included)
- Compatible with 2.25" Neck Glass Only (Sold Separately, pg. 180)



MC73RB-L
Roman Bronze

MC183 | 4-LIGHT FITTER

- H: 3.5" W: 6.5"
- (4) Candelabra 40W Bulbs (Included)
- Compatible with 2.25" Neck Glass Only (Sold Separately, pg. 180)



MC183RB-L
Roman Bronze

FITTER GLASS



G420
Frosted/Clear Glass
H: 5.28" W: 4.88"
2.25" (Neck)



G833
Clear/Frosted Victorian
H: 5.16" W: 5.04"
2.25" (Neck)



G975
White Opal Angled
H: 6.38" W: 4.30"
2.25" (Neck)



G890
Frosted Ribbed with Brushed Pewter Rim
H: 4.60" W: 4.30"
2.25" (Neck)



G966
Antique White Scavo
H: 5.24" W: 5.47"
2.25" (Neck)



G990
White Faux Alabaster
H: 5.24" W: 5.47"
2.25" (Neck)



G1014
Frosted Bell
H: 4.61" W: 4.69"
2.25" (Neck)



G885
Clear Ribbed Bell
H: 4.50" W: 4.70"
2.25" (Neck)



MC90AGP
Aged Pewter



MC90BK
Matte Black



MC90BP
Brushed Pewter



MC90BS
Brushed Steel



MC90OZ
Oil Rubbed
Bronze



MC90PN
Polished
Nickel



MC90RB
Roman Bronze



MC90TB
Tuscan Bronze



MC90TI
Titanium



MC90WH
White

MC90 (Flush Mount Canopy Kit)



MC90RB
Roman Bronze

For lower ceilings, this flush mount canopy can easily be mounted directly on the top of most Monte Carlo models (under 35 lbs), bringing your fan closer to the ceiling.



MC95AGB
Aged Bronze



MC95AGP
Aged Pewter



MC95BBS
Burnished Brass



MC95BK
Matte Black



MC95BP
Brushed Pewter



MC95BS
Brushed Steel



MC95BZ
Bronze



MC95GRY
Grey



MC95KOA
Koa



MC95PN
Polished
Nickel



MC95RB
Roman Bronze



MC95RZW
White



MC95TB
Tuscan Bronze



MC95TI
Titanium



MC95WH
White

MC95 (Slope Ceiling Canopy Kit)



MC95RB
Roman Bronze

For extreme sloped or vaulted ceilings (up to 46° pitch) this adapter can easily be mounted on most Monte Carlo models under 35 lbs.

CANOPIES | FINISHING CAPS

MCM95

(Slope Ceiling Canopy Kit Exclusive for Minimalist and Minimalist Max)



MCM95AGP
Aged Pewter

For sloped or vaulted ceilings (up to 25° pitch), this adapter can easily be mounted on the Minimalist or Minimalist Max fans.



MCM95AGP
Aged Pewter



MCM95BS
Brushed Steel



MCM95BK
Matte Black

MCM360

Finishing Cap (Blanking Plate)
Exclusive for Minimalist and Minimalist Max fans.



MCM360BS
Brushed Steel



MCM360AGP
Aged Pewter



MCM360BK
Matte Black



MCM360BS
Brushed Steel

MC360

Finishing Cap (Blanking Plate)
Exclusive for Discus, Discus II,
Discus Classic, Discus Ornate,
Discus Outdoor, Discus Trio and
Discus Trio Max fans.



MC360RB
Roman Bronze



MC360AGP
Aged Pewter



MC360BS
Brushed Steel



MC360BK
Matte Black



MC360RB
Roman Bronze



MC360RZW
Matte White



MC83AGP
Aged Pewter



MC83BK
Matte Black



MC83BP
Brushed Pewter



MC83BS
Brushed Steel



MC83PN
Polished Nickel



MC83RB
Roman Bronze



MC83TB
Tuscan Bronze



MC83WH
White

MC83 (Bowl Caps)



MC83BS
Brushed Steel

Allows use of fan & light kit pull-chain controls. Select the bowl/light kit finish that coordinates with your fan.



MC97AGP
Aged Pewter



MC97RB
Roman Bronze

MC97 (Bowl Caps)



MC97RB
Roman Bronze

When using a Monte Carlo Remote Control, this cap kit conceals pull-chain controls.

MAVERICK FINISH KITS

The below Maverick Finish Kits can be added to the Maverick Max, Maverick and Maverick II fans to create a custom look.

MCFK-BK

Maverick Finish Kit in Matte Black




MCFK-AGP

Maverick Finish Kit in Aged Pewter



MCFK-BBS

Maverick Finish Kit in Burnished Brass

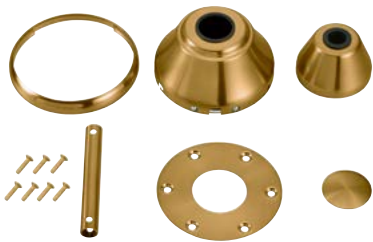

MCFK-BS

Maverick Finish Kit in Brushed Steel



MCFK-WH

Maverick Finish Kit in Matte White





60" MAVERICK
Burnished Brass Maverick Finish Kit
Matte Black Hand-Carved Balsa Wood Blades

60" ARMSTRONG
Brushed Steel Housing
Silver ABS Blades
Frosted Lexan Diffuser



RESOURCES

Blade Finishes	190
Ceiling Fan Tips	188
Downrod Options	192
Housing Finishes	191
Product Specifications	194
Item Number Index	198
Collection Index	201

CEILING FAN TIPS

The right fan starts with knowing the fan's environment for maximum airflow. Monte Carlo's expertise in design and engineering provides ceiling fan and mounting options for every room.


Selecting the Right Size Fan

When choosing a ceiling fan for your space, you'll want at least 18" to 24" of clearance on all sides. In large spaces, consider using two smaller fans.



80 SQ. FEET (OR LESS)

Fan Size: 20"-28"
CFM Range: 1,500-3,500




90-120 SQ. FEET

Fan Size: 38"-52"
CFM Range: 3,500-5,000



125-300 SQ. FEET

Fan Size: 52"-60"
CFM Range: 5,000-8,000


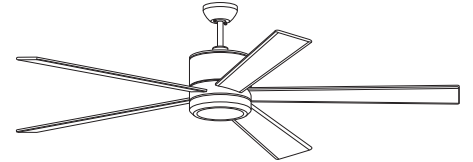


350 SQ. FEET (OR MORE)

Fan Size: 60"-99"
CFM Range: 7,000-17,000


Seasonal Settings

We recommend that you adjust your fan with the change of the seasons to ensure maximum comfort. Simply flip the switch on the fan housing, or press the reverse button on your fan control. See pg. 165 for fan control options.

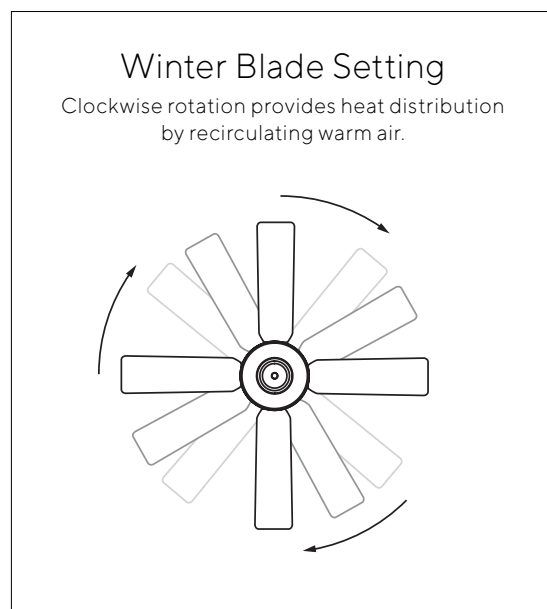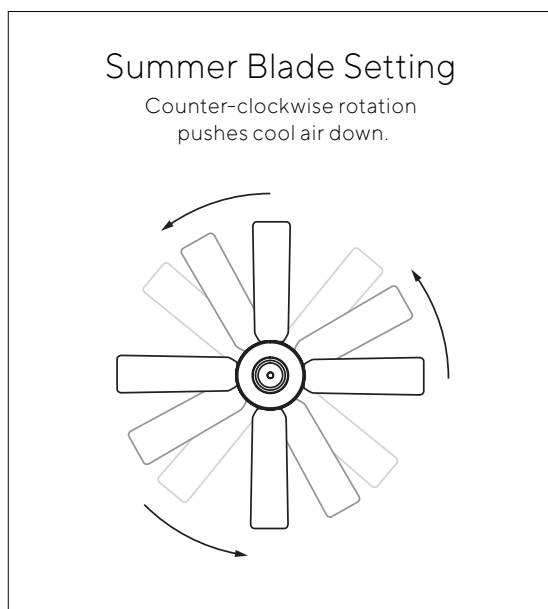


Mounting Options

When choosing a ceiling fan for your space, you'll want at least 18" to 24" of clearance on all sides. In large spaces, another option can be to go with two smaller fans.

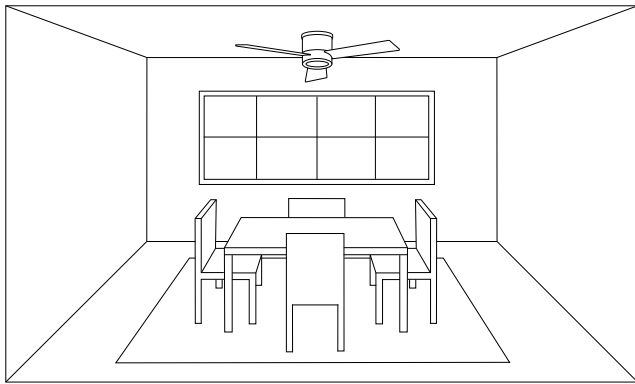


FLUSH MOUNT/HUGGER FANS

This type of mount is recommended for 8' ceilings. By eliminating the downrod, the Hugger option saves 4"-6" in length between the fan's motor housing and the ceiling. The National Electric Code requires that all fan blades be a minimum of 7' above the floor. Many Monte Carlo fans include a dual mount canopy.

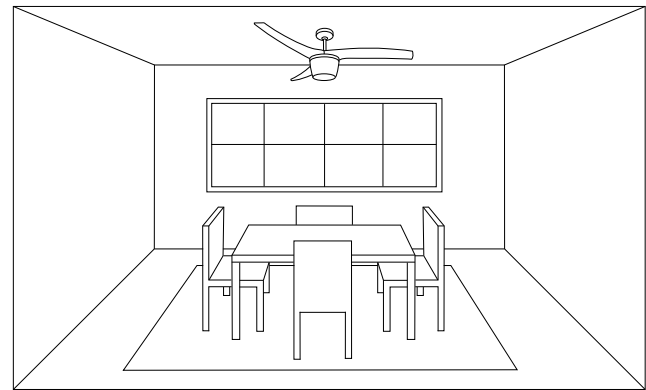


CLOSE-TO-CEILING FANS

For 8'-10' ceilings, a downrod from 4"-8" is installed between the ceiling canopy and the fan. Installing the blades further away from the ceiling allows for more air circulation and fan efficiency. Allow a minimum of 7' clearance from the floor to the lowest point on the fan blade.

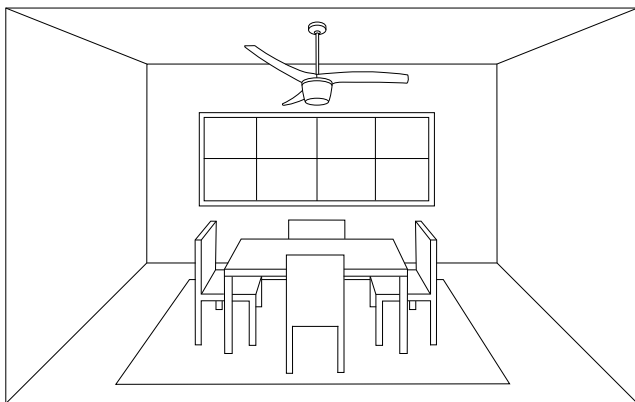

EXTENDED DOWNROD FANS

For ceilings 10' and above, such as great rooms, lofts, and expansive entryways, a longer downrod is recommended. We offer downrod lengths of 12", 18", 24", 36", 48", 60" and 72". See pg. 192 for more information on downrods..

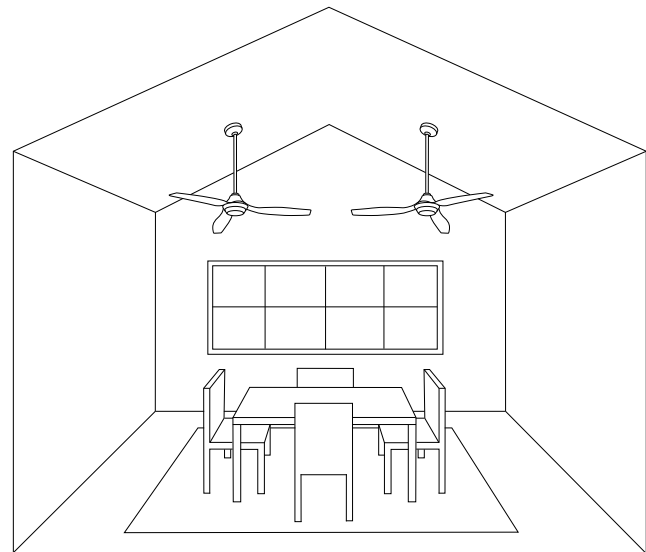

SLOPED CEILING

For ceilings pitched 25°-45°, a sloped ceiling canopy must be installed instead of the standard fan canopy—allowing the fan to hang straight. Monte Carlo offers slope canopy kits in a variety of finishes, see pages 181-182 for more information.

BLADE FINISHES



American Walnut



Bavarian Walnut



British Walnut



Bronze



Brushed Pewter



Clear Frost



Colonial Cherry



Dark Distressed Walnut



Gloss Silver



Gradient Walnut




Gray



Koa



Light Gray Weathered Oak



Lodge Pine



Mahogany



Mahogany Veneer



Matte Black



Matte Gray



Matte White



Oil Rubbed Bronze



Painted Brushed Steel




Polished Nickel



Quicksilver



Roman Bronze



Silver



Teak



Titanium



Walnut



Walnut Veneer



White

HOUSING FINISHES




AGB
Aged Brass




AGP
Aged Pewter



BBS
Burnished Brass




BK
Matte Black



BP
Brushed Pewter



BS
Brushed Steel




BZ
Bronze



CH
Chrome



GRY
Gray




KOA
Koa Wood




OZ
Oil Rubbed
Bronze




PBS
Painted
Brushed Steel



PN
Polished Nickel



QS
Quicksilver



RB
Roman Bronze



RZW
Matte White



TB
Tuscan Bronze





















TI
Titanium



WH
White

DOWNRODS

Our decorative .5" diameter downrods have pre-drilled holes on both ends. For optimum performance, we recommend that your ceiling fan be installed with the blades suspended between 8' and 9' above the floor.

Ceiling Height	9 FT	10 FT	11 FT	12 FT	13 FT	14 FT	15 FT
Suggested Downrod Length	12 IN	18 IN	24 IN	36 IN	48 IN	60 IN	72 IN
Aged Brass 	DR12AGB	DR18AGB	DR24AGB	DR36AGB	DR48AGB	DR60AGB	DR72AGB
Aged Pewter 	DR12AGP DRM12AGP*	DR18AGP	DR24AGP DRM24AGP*	DR36AGP DRM36AGP*	DR48AGP DRM48AGP*	DR60AGP	DR72AGP
Black 	DR12BK DRM12BK*	DR18BK	DR24BK DRM24BK*	DR36BK DRM36BK*	DR48BK DRM48BK*	DR60BK	DR72BK
Bronze 	DR12BZ	DR18BZ	DR24BZ	DR36BZ	DR48BZ	DR60BZ	DR72BZ
Brushed Pewter 	DR12BP	DR18BP	DR24BP	DR36BP	DR48BP	DR60BP	DR72BP
Brushed Steel 	DR12BS DRM12BS*	DR18BS	DR24BS DRM24BS*	DR36BS DRM36BS*	DR48BS DRM48BS*	DR60BS	DR72BS
Burnished Brass 	DR12BBS	DR18BBS	DR24BBS	DR36BBS	DR48BBS	DR60BBS	DR72BBS
Chrome 	DR12CH	DR18CH	DR24CH	DR36CH	DR48CH	DR60CH	N/A
Gray 	DR12GRY	DR18GRY	DR24GRY	DR36GRY	DR48GRY	DR60GRY	DR72GRY
Koa 	DR12KOA	DR18KOA	DR24KOA	DR36KOA	DR48KOA	DR60KOA	DR72KOA
Oil Rubbed Bronze 	DR12OZ	DR18OZ	DR24OZ	DR36OZ	DR48OZ	DR60OZ	DR72OZ
Polished Nickel 	DR12PN	DR18PN	DR24PN	DR36PN	DR48PN	DR60PN	DR72PN
Roman Bronze 	DR12RB	DR18RB	DR24RB	DR36RB	DR48RB	DR60RB	DR72RB
Matte Black 	DR12RZB	DR18RZB	DR24RZB	DR36RZB	DR48RZB	DR60RZB	DR72RZB
Matte White 	DR12RZW	DR18RZW	DR24RZW	DR36RZW	DR48RZW	DR60RZW	DR72RZW
Tuscan Bronze 	DR12TB	DR18TB	DR24TB	DR36TB	DR48TB	DR60TB	DR72TB
Titanium 	DR12TI	DR18TI	DR24TI	DR36TI	DR48TI	DR60TI	DR72TI
White 	DR12WH	DR18WH	DR24WH	DR36WH	DR48WH	DR60WH	DR72WH

*For use with Minimalist and Minimalist Max Fans Only

60" ORVILLE
Brushed Steel Housing
Light Grey Weathered Oak ABS Blades
Opal Etched Glass



Collection	Page Number	Fan Width (inches)	Number of Blades	Blade Pitch	Fan Height (inches)	Min Ceiling Height	Max Ceiling Slope with included hardware	Motor Diameter (mm)	Motor Height (mm)	AC or DC Motor	Wet / Damp Rated	ENERGY STAR Qualified
Adler	58	60	3	10°	12.5	8.5	15°	85	28	DC	Damp	YES
Aerotour	76	56	3	13°	16.6	8.5	20°	155	22	DC		YES
Aerotour Flush Mount	78	56	3	13°	11	8	N/A	178	12	DC		YES
Akova LED	62	56	3	17°	14.4	8	20°	125	20	DC	Damp	YES
Armstrong	60	60	3	16°	14.1	8.5	20°	125	20	DC	Damp	YES
Artizan	132	52	5	12°	17.4	8.5	30°	188	18	AC	Damp	
Avvo	34	56	3	V	12.9	8	25°	120	25	DC	Damp	
Avvo Max	32	64	3	V	12.9	8	25°	120	25	DC	Damp	
Bonneville Max	96	60	5	13°	17.3	8.5	18°	188	25	AC		
Boynton	143	54	3	14°	19.8	8.5	30°	172	20	AC	Wet	
Butterfly	70	54	4	15°	20	9	22°	153	22	AC	Damp	
Centro Max	100	52	5	14°	14.2	8.5	18°	188	15	AC		
Centro Max II	102	44	5	14°	13.1	8.5	18°	153	15	AC		
Clarity	38	52	3	12°	9.2	8	N/A	153	18	AC		
Clarity II	40	42	3	12°	9.2	8	N/A	153	12	AC		
Clarity Max	36	56	3	12°	9.7	8	N/A	172	17	AC		
Colony II	158	28	4	18°	12.4	8	30°	153	12	AC		
Colony Max	110	52	5	12°	12.8	8	30°	153	18	AC	Damp	
Colony Max Plus	108	52	5	12°	17.7	8	30°	153	18	AC	Damp	
Colony Super Max	106	60	5	12°	18.5	8	30°	188	20	AC	Damp	
Colony Super Max Plus	104	60	5	12°	18.5	8	30°	188	20	AC	Damp	
Cruise	144	52	5	13°	14	8	30°	172	20	AC	Wet	
Cyclone	138	60	5	13°	14	8	30°	212	25	AC	Wet	
Delray	140	56	3	17°	15.8	8.5	20°	125	20	DC	Wet	
Designer Max	97	52	5	12°	13.1	8	18°	188	15	AC		
Destin	66	57	3	16°	13.7	8	20°	120	15	DC	Damp	
Discus	90	52	5	12°	15.1	8	30°	153	18	AC		
Discus Classic	86	52	5	12°	15.1	8	30°	153	18	AC		
Discus Classic II	88	44	5	12°	15.1	8	30°	153	18	AC		
Discus II	92	44	5	12°	15.1	8	30°	153	15	AC		
Discus Ornate	134	52	5	12°	15.1	8	30°	153	18	AC		
Discus Outdoor	146	52	5	12°	15.1	8	30°	153	18	AC	Wet	
Discus Trio	84	52	3	16°	15.7	8	30°	172	20	AC	Damp	
Discus Trio Max	82	58	3	16°	15.7	8	30°	172	20	AC	Damp	
Dylan	142	56	3	16°	16.5	8.5	20°	188	25	DC	Wet	
Embassy Max	98	60	5	13°	14.8	8.5	18°	188	25	AC		
Empire	64	60	8	12.5°	15.4	8	25°	188	14	AC		
Haven 44 Outdoor	152	44	5	12°	14.6	8	30°	153	15	AC	Wet	
Haven 52	126	52	5	12°	14.6	8	30°	153	12	AC		

PRODUCT SPECIFICATIONS

Energy Use at High (W)	Airflow at High (CFM)	Efficiency at High (CFM/W)	Energy Use Average (W) Standard	Airflow Average (CFM) Standard	Estimated Yearly Energy Cost (\$) Standard	Efficiency Average (CFM/W) Standard	Energy Use at High (W) Flush Mount	Airflow at High (CFM) Flush Mount	Efficiency at High (CFM/W) Flush Mount	Energy Use Average (W) Flush Mount	Airflow Average (CFM) Flush Mount	Estimated Yearly Energy Cost (\$) Flush Mount	Efficiency Average (CFM/W) Flush Mount
29.41	5818	200	20	3996	6	200							
***	***	***	***	***	***	***							
***	***	***	***	***	***	***							
33	4515	133	25	3279	7	131							
32.98	7732	233	22	5356	6	248							
73	5521	76	44	3669	12	83							
24	6461	270	12	3885	3	325							
31	7979	257	19	5642	5	290							
69	6149	89	43	4408	12	102	69	5504	80	43	3951	12	91
65	5687	87	41	3929	11	97							
64	4903	76	41	3297	11	81							
63	5146	82	40	3762	11	94	63	4687	74	40	3393	11	84
44	3252	74	30	2400	8	81	44	3068	70	30	2297	8	77
63	3682	59	36	2804	10	77							
39	2401	62	30	1870	8	63							
64	4381	68	38	2753	11	73							
49	2102	43	30	1483	9	49	49	1550	32	30	1047	9	34
58	4201	72	37	3123	10	84	58	2469	42	37	1748	10	47
58	4224	73	37	3164	10	85	58	2867	49	37	1900	10	51
72	5509	76	47	4096	13	87	72	4937	68	47	3633	13	77
72	5510	77	47	3963	13	84	72	4581	63	47	3356	13	71
68	4324	64	42	3238	12	76							
81	6666	82	52	4890	15	93							
43	5583	174	29	4035	8	139							
64	5096	80	39	3526	11	91	64	4653	73	39	3238	11	84
27	5624	225	17	3928	5	225							
65	4758	73	41	3415	11	83	65	3382	52	41	2164	12	53
65	4758	73	41	3415	11	83	65	3217	49	41	2164	12	53
58	3954	68	37	2854	10	77	58	3954	68	37	1970	10	53
58	3954	68	37	2850	10	77	58	3032	52	37	1970	10	53
65	4758	73	41	3415	11	83							
66	4781	73	41	3415	11	83							
65	4669	72	40	3255	11	81	65	2464	38	40	1545	11	38
69	5068	73	43	3527	12	83	70	1317	19	42	933	12	22
43	8550	241	25	6137	7	241							
76	6145	80	46	4144	13	91	77	5757	75	46	3832	13	84
38	7271	192	18	4856	5	265							
58	4025	69	36	2900	10	81	58	3913	67	36	2740	10	77
60	4402	74	38	3241	11	86	60	4026	68	38	3013	11	80

***Testing data not available at press time.

Collection	Page Number	Fan Width (inches)	Number of Blades	Blade Pitch	Fan Height (inches)	Min Ceiling Height	Max Ceiling Slope with included hardware	Motor Diameter (mm)	Motor Height (mm)	AC or DC Motor	Wet / Damp Rated	ENERGY STAR Qualified
Haven 52 LED2	128	52	5	12°	19.3	8	30°	153	12	AC		
Haven 52 LED3	130	52	5	12°	20.6	8	30°	153	12	AC		
Haven 52 Outdoor	150	52	5	12°	14.6	8	30°	153	15	AC	Wet	
Haven 52 Outdoor LED	148	52	5	12°	19.2	8	30°	153	15	AC	Wet	
Kingston	54	72	8	V	17.3	8.5	15°	120	30	DC	Damp	YES
Lily	69	56	5	14°	16.2	8.5	15°	120	25	DC	Damp	
Mach One	52	52	3	13°	14.5	8	15°	172	20	AC		
Mach Two	53	38	3	13°	14.5	8	15°	172	14	AC		
Maverick	22	60	3	V	11.7	8	15°	85	28	DC	Damp	YES
Maverick Grand	12	99	3	V	13.9	8.5	15°	120	35	DC	Damp	
Maverick II	26	52	3	V	11.7	8	15°	85	28	DC	Damp	YES
Maverick II LED	24	52	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick LED	20	60	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick Max	18	70	3	V	11.7	8	15°	85	28	DC	Damp	YES
Maverick Max LED	16	70	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick Super Max	14	88	3	V	13.9	8.5	15°	120	25	DC	Damp	
Melody	68	56	3	V	14.2	8.5	15°	120	30	DC	Damp	
Metrograph	80	56	4	13°	16.6	8.5	20°	178	12	DC		YES
Micro 24	156	24	3	14°	13.2	8	30°	153	10	AC		
Mini 20	160	20	4	12°	12	8	30°	153	10	AC		
Minimalist	30	56	3	V	13.7	8.5	6°	85	25	DC	Damp	YES
Minimalist Max	28	72	3	V	13.7	8.5	6°	85	28	DC	Damp	YES
Orville	56	60	3	10°	14.1	8	15°	120	25	DC	Damp	YES
Piper	114	54	5	12°	21.5	8.5	30°	153	20	AC		
Prairie	120	62	14	14°	14.1	8.5	20°	125	25	DC	Damp	YES
Prairie Grand	118	72	14	14°	14.1	8.5	20°	125	25	DC	Damp	YES
Prairie II	122	52	14	14°	14.1	8.5	20°	125	25	DC	Damp	YES
Sleek LED	94	52	5	12°	15	8	30°	153	18	AC		
Strasburg	133	56	5	13°	22.2	8.5	18°	188	25	AC		
Studio	72	54	3	10°	14.8	8	22°	188	22	AC		
Traverse	112	52	5	12°	12	8	N/A	153	18	AC		
Turbine LED	65	56	8	15°	19.1	8.5	30°	165	25	AC		
Vision	48	52	3	12°	14.6	8	30°	153	18	AC		
Vision 72	44	72	5	12°	16.7	8.5	30°	178	22	DC		YES
Vision 84	42	84	5	12°	16.7	8.5	30°	178	22	DC		YES
Vision II	50	42	3	12°	14.5	8.5	30°	153	12	AC		
Vision Max	46	56	3	12°	14	8	30°	172	20	AC	Damp	
York 52	125	52	5	12°	14.3	8	30°	153	18	AC		
York 60	124	60	5	12°	14.3	8	30°	188	20	AC		

PRODUCT SPECIFICATIONS

Energy Use at High (W)	Airflow at High (CFM)	Efficiency at High (CFM/W)	Energy Use Average (W) Standard	Airflow Average (CFM) Standard	Estimated Yearly Energy Cost (\$) Standard	Efficiency Average (CFM/W) Standard	Energy Use at High (W) Flush Mount	Airflow at High (CFM) Flush Mount	Efficiency at High (CFM/W) Flush Mount	Energy Use Average (W) Flush Mount	Airflow Average (CFM) Flush Mount	Estimated Yearly Energy Cost (\$) Flush Mount	Efficiency Average (CFM/W) Flush Mount
60	4355	73	38	3241	11	86	60	4068	68	38	3020	11	80
60	4344	73	38	3225	11	85	60	4135	69	38	3039	11	80
59	4482	76	36	3206	10	89	59	4102	70	36	2956	10	82
59	4510	77	36	3228	10	90	59	4072	69	36	2956	10	82
28	10213	367	20	7713	6	385							
29	6624	254	19	4698	5	253							
56	4306	81	37	3057	10	82							
46	3239	75	34	2516	9	75							
27	6687	245	20	4551	6	231							
75	17395	63	**	**	**	**							
27	5589	217	18	3807	5	208							
30	6928	230	21	4707	6	229							
34	7680	228	20	5365	6	269							
26	6528	253	18	4976	5	270							
22	7336	331	18	5943	5	337							
575	14784	26	**	**	**	**							
87	7212	83	19	5088	5	264							
***	***	***	***	***	***	***							
40	1474	37	24	1120	7	47	40	1441	36	24	1088	7	46
39	1248	32	26	1058	7	41	39	1246	32	26	1023	7	40
27	7240	267	21	5089	6	246							
31	9468	302	22	6934	6	322							
24	7543	309	18	5739	5	317							
68	5303	78	40	3730	11	92							
34	7233	220	23	5003	6	221							
33	7519	228	21	5326	6	251							
23	5069	220	16	3310	4	211							
65	4432	68	42	3072	12	74							
84	6225	74	53	4298	15	82							
96	8508	88	**	**	**	**							
60	2327	39	41	1737	11	43							
34	8183	243	22	6045	6	274							
44	3406	78	32	2685	9	83							
33	10197	308	21	7512	6	353							
30	11277	373	21	8997	6	431							
41	2185	53	29	1678	8	57							
64	5204	81	37	3334	10	89							
61	4851	80	39	3645	11	93	60	3844	64	39	2769	11	71
71	6191	87	45	4419	13	99	71	4601	64	45	2809	13	63

** Weighted averages not applicable.
 *** Testing data not available at press time.

INDEX

14PRR52AGPD	122	3MAVR60BKD	20	3TF24PN	156
14PRR62AGPD	120	3MAVR60BS	23	3TF24WH	157
14PRR62BSD	122	3MAVR60BSD	21	3VNMR56BSD-V1	47
3ADR60AGP	58	3MAVR60BSKOA	22	3VNMR56RBD-V1	46
3ADR60BKBK	58	3MAVR60BSKOAD	21	3VNMR56RZWD-V1	47
3ADR60BS	59	3MAVR60RZW	23	3VNR42BSD-V1	51
3ADR60RZW	59	3MAVR60RZWD	21	3VNR42OZD-V1	50
3AKR56BKD	62	3MAVR70AGP	19	3VNR42RZWD-V1	51
3AKR56CHD	62	3MAVR70AGPD	17	3VNR52RBSD-V1	49
3AKR56RZWD	62	3MAVR70BK	19	3VNR52OZD-V1	49
3AMR60AGPD	60	3MAVR70BKBK	18	3VNR52RZWD-V1	48
3AMR60BSD	61	3MAVR70BKBKD	16	4BFR54BSD	70
3AMR60RZWD	61	3MAVR70BKD	16	4CO28BK	158
3AVMR64AGPD	33	3MAVR70BS	18	4CO28BP	159
3AVMR64GRYD	33	3MAVR70BSD	17	4CO28RB	159
3AVMR64KOAD	32, 35	3MAVR70BSKOA	19	4CO28WH	159
3AVMR64QSD	33	3MAVR70BSKOAD	17	4MC20BS	160
3AVMR64RZWD	33	3MAVR70RZW	19	4MC20RB	161
3AVOR56GRYD-V1	34	3MAVR70RZWD	17, 21	4MC20WH	161
3BTR54ANBZD	143	3MAVR88AGP	15	4TSR56BZD	81
3BTR54PBSD	143	3MAVR88BK	14, 16	4TSR56BZHABD	80
3CLMR56BSD-V1	37	3MAVR88BKBK	14, 16	4TSR56PNLGWOD	81
3CLMR56RBD-V1	36	3MAVR88BS	15, 17	55BR56TBD-L	133
3CLMR56RZWD-V1	37	3MAVR88BSKOA	15	5AZR56AGP	132
3CLYR42BSD-V1	40	3MAVR88RZW	15, 17	5AZR56RB	132
3CLYR42OZD-V1	41	3MAVR99AGP	13	5BHM60BS	96
3CLYR42RZWD-V1	41	3MAVR99BK	12	5BHM60RB	96
3CLYR52BSD-V1	39	3MAVR99BKBK	12, 14	5COM52AGP	111
3CLYR52OZD-V1	38	3MAVR99BS	13	5COM52AGPD	108
3CLYR52RZWD-V1	39	3MAVR99BSKOA	13	5COM52BS	110
3DIR52BSD-V1	85	3MAVR99AGPD	68	5COM52BSD	109
3DIR52RBD-V1	85	3MER56BSD	68	5COM52RB	111
3DIR52RZWD-V1	84	3MNLR56AGPD-V1	31	5COM52RBD	109
3DIR58BSD-V1	83	3MNLR56BKD-V1	30	5COM52RZW	110
3DIR58RBD-V1	82	3MNLR56BSD-V1	31	5COM52RZWD	108
3DIR58RZWD-V1	83	3MNLR72AGPD-V1	28	5CQM44BS	103
3DLR56AGP	140	3MNLR72BKD-V1	29	5CQM44RB	103
3DLR56RB	140, 141	3MNLR72BSD-V1	29	5CQM44RZW	102
3DLR56RZW	140	3MO52TMO-L	52	5CQM52BS	100
3DSTR57AGPD	66	3MO52WHO-L	52	5CQM52RB	101
3DSTR57BSD	66	3MTR38TMO-L	53	5CQM52RZW	101
3DYR56AGB	142	3MTR38WHO-L	53	5CSM60AGP	106
3DYR56AGP	142	3OVR60BKBKD	56	5CSM60AGPD	104
3MAVR52AGP	27	3OVR60BSD	57	5CSM60BS	106
3MAVR52AGPD	24	3OVR60BSLGWOD	56	5CSM60BSD	105
3MAVR52BK	27	3OVR60RZWD	57	5CSM60RB	107
3MAVR52BKBK	26	3SU54BK	72	5CSM60RBD	104, 119, 120, 122
3MAVR52BKBKD	24	3SU54BP	73	5CSM60RZW	107
3MAVR52BKD	25	3SU54PN	73	5CSM60RZWD	105
3MAVR52BS	27	3SU54RB	72	5CU52RB	144
3MAVR52BSKOA	27	3SU54WH	73	5CU52WH	144
3MAVR52BSKOAD	25	3TAHR56BZD	78	5CY60BK	138
3MAVR52RZW	26	3TAHR56PNDMD	78	5CY60RB	139
3MAVR52RZWD	25	3TAHR56PNLGWOD	79	5CY60WH	139
3MAVR60AGP	23	3TAHR56SND	79	5DI44BKD	92
3MAVR60AGPD	21	3TAR56BZD	76	5DI44BSD	93
3MAVR60BK	23	3TAR56PNDMD	76	5DI44PND	92
3MAVR60BKBK	22	3TAR56PNLGWOD	77	5DI44RBD	93
3MAVR60BKBKD	20	3TAR56SND	77	5DI44WHD	93

5DI52AGPD	91	5PPR54BS	114	DR18TI	192
5DI52BKD-L	90	5SLR52BSD-V1	94	DR18WH	192
5DI52BSD-L	91	5SLR52RBD-V1	95	DR24AG	192
5DI52PND	91	5SLR52WHD-V1	95	DR24AGB	192
5DI52RBD-L	90	5TV52AGPD	113	DR24BK	192
5DI52WHD-L	91	5TV52BSD	112	DR24BP	192
5DIC44AGPD-V1	89	5TV52RBD	113	DR24BS	192
5DIC44BKD-V1	89	5TV52WHD	112	DR24CH	192
5DIC44BSD-V1	89	5VMR72BSD	45, 49	DR24GRY	192
5DIC44PND-V1	88	5VMR72OZD	44	DR24KOA	192
5DIC44RBD-V1	88	5VMR72RZWD	45	DR24OZ	192
5DIC44WHD-V1	89	5VMR84BSD	43	DR24PN	192
5DIC52AGPD-V1	87	5VMR84OZD	43	DR24RB	192
5DIC52BKD-V1	87	5VMR84RZWD	42	DR24RZB	192
5DIC52BSD-V1	86	5YK60AGP	124, 125	DR24RZW	192
5DIC52PND-V1	87	5YK60BK	124, 125	DR24TB	192
5DIC52RBD-V1	86, 118, 119, 120, 122	8EER60BSD-V1	64	DR24TI	192
5DIC52WHD-V1	87	8KGR72BKD	54	DR24WH	192
5DIO52AGPD	135	8KGR72BSLGWOD	54	DR36AGB	192
5DIO52BKD	134	8KGR72RZWD	54	DR36AGP	192
5DIO52RBD	135	8TNR56BKD-V1	65	DR36BK	192
5DIW52PBSD	147	8TNR56PBSD-V1	65	DR36BP	192
5DIW52RBD	147	8TNR56RZWD-V1	65	DR36BS	192
5DIW52WHD	146	C		DR36CH	192
5DM52BS	97	CK250	168	DR36GRY	192
5DM52RB	97	CK300	168	DR36KOA	192
5DM52RZW	97	CT100	168	DR36OZ	192
5EM60BS	99	D		DR36PN	192
5EM60PN	98, 99	DR12AGB	192	DR36RB	192
5EM60RB	98	DR12AGP	192	DR36RZB	192
5EM60RZW	99	DR12BK	192	DR36RZW	192
5HV52BK	126	DR12BP	192	DR36TB	192
5HV52BKD	128	DR12BS	192	DR36TI	192
5HV52BKF	130	DR12BZ	192	DR36WH	192
5HV52BPD	129	DR12CH	192	DR48AGB	192
5HV52BPF	131	DR12GRY	192	DR48AGP	192
5HV52BS	127	DR12KOA	192	DR48BK	192
5HV52BSD	129	DR12OZ	192	DR48BP	192
5HV52BSF	131	DR12PN	192	DR48BS	192
5HV52BZ	127	DR12RB	192	DR48CH	192
5HV52BZD	129	DR12RZB	192	DR48GRY	192
5HV52BZF	130, 135	DR12RZW	192	DR48KOA	192
5HV52CH	126	DR12TB	192	DR48OZ	192
5HV52CHD	129	DR12TI	192	DR48PN	192
5HV52CHF	131	DR12WH	192	DR48RB	192
5HV52RZW	127	DR18AGB	192	DR48RZB	192
5HV52RZWD	128	DR18AGP	192	DR48RZW	192
5HV52RZWF	131	DR18BK	192	DR48TB	192
5HVO44BK	152	DR18BP	192	DR48TI	192
5HVO44BZ	153	DR18BS	192	DR48WH	192
5HVO44RZW	153	DR18CH	192	DR60AGB	192
5HVO52BK	151	DR18GRY	192	DR60AGP	192
5HVO52BKD	149	DR18KOA	192	DR60BK	192
5HVO52BZ	151	DR18OZ	192	DR60BP	192
5HVO52BZD	148	DR18PN	192	DR60BS	192
5HVO52RZW	150	DR18RB	192	DR60CH	192
5HVO52RZWD	149	DR18RZB	192	DR60GRY	192
5LLR56BSD-V1	69	DR18RZW	192	DR60KOA	192
5LLR56RZWD-V1	69	DR18TB	192	DR60OZ	192

INDEX

DR60PN	192
DR60RB	192
DR60RZB	192
DR60RZW	192
DR60TB	192
DR60TI	192
DR60WH	192
DR72AGB	192
DR72AGP	192
DR72BK	192
DR72BP	192
DR72BS	192
DR72GRY	192
DR72KOA	192
DR72OZ	192
DR72PN	192
DR72RB	192
DR72RZB	192
DR72RZW	192
DR72TB	192
DR72TI	192
DR72WH	192
DRM12AGP	192
DRM12AGP*	192
DRM12BK	192
DRM12BS	192
DRM24AGP	192
DRM24BK	192
DRM24BS	192
DRM24BZ	192
DRM36AGP	192
DRM36BK	192
DRM36BS	192
DRM36BZ	192
DRM48AGP	192
DRM48BK	192
DRM48BS	192
DRM48BZ	192
E	
ESSWC-3	169
ESSWC-4	170
ESSWC-5-WH	170
ESSWC-6	171
ESSWC-7-WH	171
ESWC-1	169
G	
G1014	180
G420	180
G833	180
G885	180
G890	180
G966	180
G975	180
G990	180
H	
H3BS-L	179
H3RB-L	179
H4BP-L	179
H4BS-L	179

H4RB-L	179
H4WH-L	179
M	
MC04-L	175
MC07PWH-B	174
MC07RB-B	174
MC144	175
MC165-L	176
MC18BS-B	175
MC18PN	175
MC18RB-B	175
MC18WH-B	175
MC214BS	174
MC224BS	174
MC224RB	174
MC224RZW	174
MC236BS	174
MC236RB	174
MC239BS	176
MC239RZW	176
MC240RB	177
MC242BS	177
MC242RB	177
MC242RZW	177
MC243BS	177
MC243RB	177
MC243RZW	177
MC244RB	177
MC244WH	177
MC245BS	178
MC245RB	178
MC245RZW	178
MC246RB	178
MC246WH	178
MC247BS	178
MC247RB	178
MC247RZW	178
MC360AGP	182
MC360BK	182
MC360BS	182
MC360RB	182
MC360RZW	182
MC37RB-L	179
MC49-L	176, 177
MC79-L	176
MC83AGP	183
MC83BK	183
MC83BP	183
MC83BS	183
MC83PN	183
MC83RB	183
MC83TB	183
MC83WH	183
MC84RB-L	175
MC90AGP	181
MC90BK	181
MC90BP	181
MC90BS	181
MC90OZ	181

MC90PN	181
MC90RB	181
MC90TB	181
MC90TI	181
MC90WH	181
MC95AGP	181
MC95BK	181
MC95BP	181
MC95BS	181
MC95OZ	181
MC95PN	181
MC95RB	181
MC95TB	181
MC95TI	181
MC95WH	181
MC97AGP	183
MC97RB	183
MCM360AGP	182
MCM360BK	182
MCM360BS	182
MCM95AGP	182
MCM95B	182
MCM95BK	182
MCM95BS	182
MCRC1	166
MCRC1R	167
MCRC1RBP	167
MCRC1RBS	167
MCRC1RPN	167
MCRC1RRB	167
MCRC1RRZW	167
MCRC1T	166
MCRC3	166
MCRC3R	167
MCRC3RBP	167
MCRC3RBS	167
MCRC3RPN	167
MCRC3RRB	167
MCRC3RRZW	167
MCRC3W	166, 167

Adler	58	Haven 52 LED 2	128
Aerotour	76	Haven 52 Outdoor	150
Aerotour Flush Mount	78	Haven 52 Outdoor LED	148
Akova LED	62	Kingston	54
Armstrong	60	Lily	69
Artizan	132	Mach One	52
Avvo	34	Mach Two	53
Avvo Max	32	Maverick	22
Bonneville Max	96	Maverick II	26
Boynton	143	Maverick II LED	24
Butterfly	70	Maverick Grand	12
Centro Max	100	Maverick LED	20
Centro Max II	102	Maverick Max	18
Clarity	38	Maverick Max LED	16
Clarity II	40	Maverick Super Max	14
Clarity Max	36	Melody	68
Colony II	158	Metrograph	80
Colony Max	110	Micro 24	156
Colony Max Plus	108	Mini 20	160
Colony Super Max	106	Minimalist	30
Colony Super Max Plus	104	Minimalist Max	28
Cruise	144	Orville	56
Cyclone	138	Piper	114
Delray	140	Prairie II	122
Designer Max	97	Prairie	120
Destin	66	Prairie Grand	118
Discus	90	Sleek LED	94
Discus II	92	Strasburg	133
Discus Classic	86	Studio	72
Discus Classic II	88	Traverse	112
Discus Ornate	134	Turbine LED	65
Discus Outdoor	146	Vision	48
Discus Trio	84	Vision II	50
Discus Trio Max	82	Vision 72	44
Dylan	142	Vision 84	42
Embassy Max	98	Vision Max	46
Empire	64	York 52	125
Haven 44 Outdoor	152	York 60	124
Haven 52	126		

MONTE  CARLO
CEILING FAN COMPANY

7400 Linder Avenue
Skokie, IL 60077

Phone: 800.519.4092
Fax: 866.490.7765

montecarlofans.com | [@montecarlofanco](https://www.instagram.com/montecarlofanco) | [#montecarlofans](https://www.facebook.com/montecarlofans)